## GARLAND

# Cuisine Series Heavy Duty Even-Heat Hot Top Range

#### Models

• C36-8R

C36-8C

- C36-8SC36-8M

Model C36-8R Range with Three 12" Even-Heat Hot Tops

## Standard Features

- Three 25,000 BTU/h (NG) even-heat hot tops
- Stainless steel front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior
- R model 4 rack positions
- C model 3 rack positions • R model - 1 chrome plated rack
- C model 3 chrome plated rack
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°- 260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

### Options & Accessories

- Stainless steel oven interior in lieu
  of porcelain oven interior NC
- Single or double deck high shelf or back riser
- Full-height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" NPT (Specify)
- Rear gas connection: 3/4", 1", 1 1/4" NPT (Specify)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extra oven rack
- Extension for 1/9 pans

## Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model \_\_\_\_\_\_ with total BTU/h rating of \_\_\_\_\_\_when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

**Ovens** - One piece oven door. Stainless steel oven interior with a heavy- duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

**Even-Heat Hot Tops -** 12" (305mm) Section. 25,000 BTU/h each burner with one per plate.

NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall

NOTE: Ranges supplied with casters must be installed with an approved restraining device.





Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, Ontario L4W 1X4 CANADA General Inquires 1-905-624-0260 USA Sales, Parts and Service 1-800-424-2411 Canadian Sales 1-888-442-7526 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com 7884 01/24



Project <sub>-</sub> Item


Ouantity

Date \_

CSI Section 11400

# GARLAND



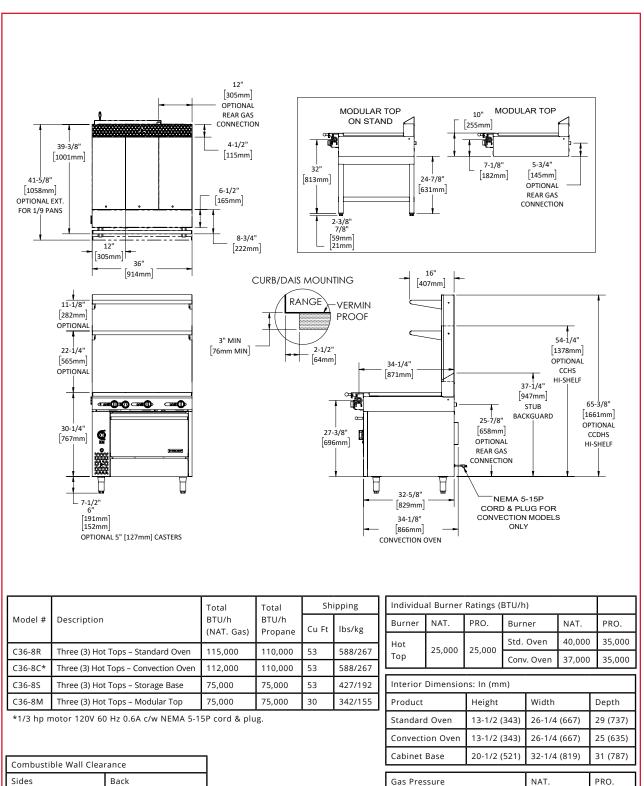

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, Ontario L4W 1X4 CANADA

6" (152mm)

10" (254mm)

General Inquires 1-905-624-0260 USA Sales, Parts and Service 1-800-424-2411 Canadian Sales 1-888-442-7526 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com 7884 01/24

Minimum Supply

Manifold Operating Pressure

Gas Manifold 1-1/4" NP



7″ WC

6″ WC

11" WC

10" WC