



SERVING STATIONS

SERVING LINE FROST TOP MODELS RS FG-RFT

Fiberglass self-contained, mechanically cooled frost top serving station. 16 gauge stainless steel top with locking device designed to work with all other serving line equipment. One-piece fiberglass body, available with enclosed base or open storage is provided with 4 swivel casters (2 locking). Recessed frost top is constructed using 1-piece stainless steel with wrapped refrigeration, foamed in place urethane insulation with 1" drain and valve provided. R-290 wrapped refrigeration system includes electronic control and cordset for 115v operation.

SHORT FORM SPEC: Fiberglass self-contained mechanically cooled frost top serving station. 16 gauge stainless steel top with locking device, one-piece fiberglass body provided with 4 swivel casters (2 locking). 1-piece recessed frost top display sized to accommodate a variety of half (13"x18") and/or full (18"x26") sized sheet pans. Electronically controlled R290 refrigeration system, urethane insulation and 1" drain with valve.

AVAILABLE MODELS:

CLOSED BASE (NO STORAGE):

- RS FGC-RFT-2
- RS FGC-RFT-3
- RS FGC-RFT-4
- RS FGC-RFT-5
- RS FGC-RFT-6

OPEN BASE (STORAGE):

- RS FGO-RFT-4
- RS FGO-RFT-5
- RS FGO-RFT-66

AVAILABLE FIBERGLASS COLORS:

PITCH BLACK
DARK BARK BROWN
CABERNET WINE
BRITISH RACING GREEN
TIN MAN GRAY
TRUE BLUE
LIGHT SKY BLUE
CANDY APPLE RED
TIGER LILLY ORANGE
CANARY YELLOW
WHITE

STANDARD FEATURES:

- Self-contained, wrapped refrigeration system with electronic control, system utilizes "CFC free", R-290 refrigerant
- All stainless steel top and coved corner interior
- Drain and gate valve provided
- Foamed in place, "CFC free" urethane insulation
- Swivel casters - (2) locking
- SNAP compliant (0) ozone depletion (ODP) and (3) global warming potential (GWP)
- Concealed locking mechanism with easy to use spring activated catch
- One piece fiberglass body
- 8' cordset for 115v operation

CABINET CONSTRUCTION: Body to be one-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers. Hinged louvered door provides access to drain valve and electronic control. Recessed frost top display wrapped with refrigeration lines and insulated with high density (CFC free) polyurethane, foamed in place. Unit to be equipped with 4 swivel casters, (2) locking. FGO models include stainless steel storage compartment in base constructed of 22 gauge stainless steel with integrally welded steel under-bracing.

TOP CONSTRUCTION: Top to be one piece of die-formed 16 gauge stainless steel with 1 1/2", 90° nosing on all sides. Unit fitted with 1" deep recessed self-contained frost top display. Interior of pan to be one piece, continuously welded construction of 16 gauge stainless steel. Interior fitted with 1" drain and gate valve located behind the louvered access door.

REFRIGERATION: SNAP compliant (0) ozone depletion (ODP) and (3) global warming potential (GWP), R-290 refrigeration system to be wrapped refrigeration construction. Condensing unit, and electronic control for operator adjust-ability mounted in unit body accessible through hinged louvered door. 8' cordset (NEMA 5-15P) supplied for 115V operation.

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400



Model RS FGC-RFT-4 shown



OPTIONS/ACCESSORIES:

- Canopy
- Overshelves
- Trayslides
- Corian top
- Custom color
- 14 Gauge top
- Graphics
- Breath guards
- Elementary school height
- Electrical outlet mounted in base



ADDITIONAL RESOURCES:

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)



RS FGC-RFT-2





RS FGC-RFT-3





RS FGO-RFT-4
RS FGC-RFT-4




RS FGO-RFT-5
RS FGC-RFT-5

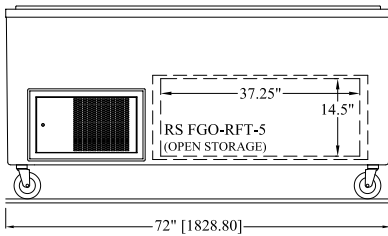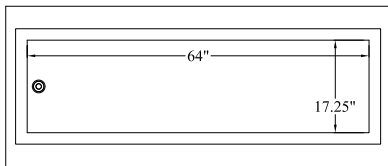

RS FGO-RFT-6
RS FGC-RFT-6

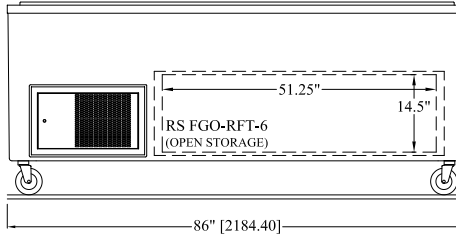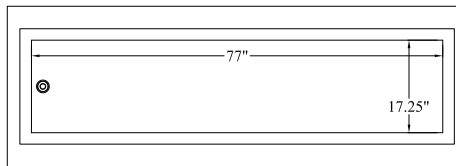

RS FGx-RFT
(END VIEW)



Old Model	New Model	Length	Depth	Height	18 x 13 Pan Capacity	HP	Volts	Amps	NEMA	Ship Wt
RANFG FTA-2	RS FGC-RFT-2	36"	30"	35.5"	2	1/4	115/60/1	3.5	5-15P	250
RANFG FTA-3	RS FGC-RFT-3	48"	30"	35.5"	3	1/4	115/60/1	3.5	5-15P	300
RANFG FTA-4	RS FGC-RFT-4	60"	30"	35.5"	4	1/4	115/60/1	3.5	5-15P	350
RANFG FTA-5	RS FGC-RFT-5	72"	30"	35.5"	5	1/4	115/60/1	3.5	5-15P	400
RANFG FTA-6	RS FGC-RFT-6	86"	30"	35.5"	6	1/4	115/60/1	3.5	5-15P	450
RANFG FTA-4S	RS FGO-RFT-4	60"	30"	35.5"	4	1/4	115/60/1	3.5	5-15P	350
RANFG FTA-5S	RS FGO-RFT-5	72"	30"	35.5"	5	1/4	115/60/1	3.5	5-15P	400
RANFG FTA-6S	RS FGO-RFT-6	86"	30"	35.5"	6	1/4	115/60/1	3.5	5-15P	450