

Project Name: Location: Item #: ______ Qty: _____

M	n	le		
111	υı	JGI		

MIM120 SELF-CONTAINED ICE MACHINE

MODEL:

MIM120





ELECTRIC -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set included



3RD PARTY APPROVALS









Zero Ozone Depletion Potential

MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797 The MIM120 self-contained, air-cooled ice machine is perfect for any free-standing or built-in application. Each unit features a self-contained storage bin and a durable, easy to clean stainless steel and black plastic trim exterior. The easy-to-use controls, front-breathing design with vertical evaporator and proven ice making technology will deliver years of reliable ice production.

FEATURES AND CONSTRUCTION ——

- Stainless steel exterior with black plastic trim
- Air cooled compressor
- Programmable, solid state, digital electronic control system.
- Built-in self cleaning mode
- Automatic shut off / overflow protection
- Includes scoop
- Polyethylene storage bin liner for improved sanitation

DAILY ICE PRODUCTION —

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) MIM120..... 120 lbs (54.4 kg)


Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

ICE BIN STORAGE CAPACITY -----

OPERATING REQUIREMENTS —

Ambient Air Temperature Rang	e 50° to 100°F (10° to 38°C)
Water Temperature Range	41° to 90°F (5° to 32°C)
Water Usage per 100 lbs of ice	22 Gallons (83.3L)
Water Supply Line Connection .	3/8" FPT
Water Pressure Range:	
Min PSI 15	Max PSI75*
Min Bar 1.0	Max Bar5.5
*Above 75 PSI requires a	regulator
Energy Consumption per 100 II	bs of ice:
MIM120	11.3 kWh/100 lbs

MAXX ICE MIM120 Self-contained ice machine

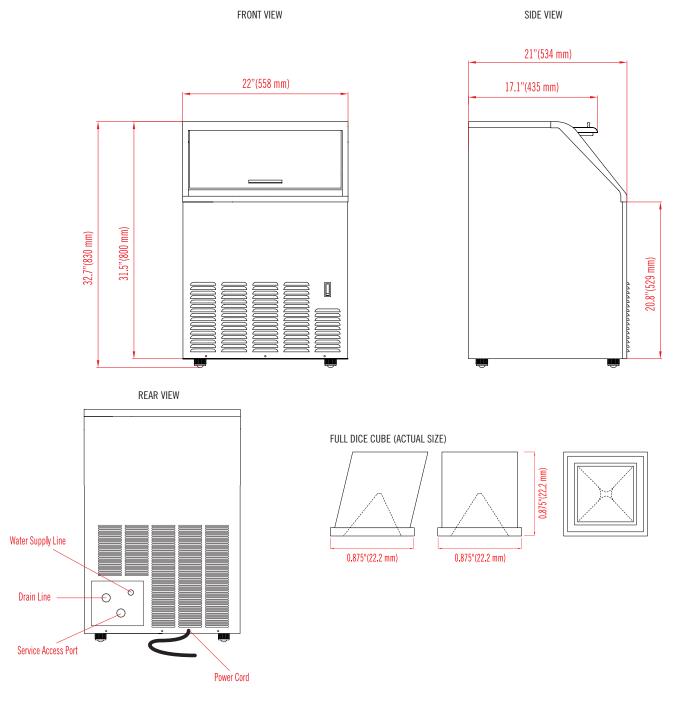

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN Storage capacity	NET WEIGHT / Shipping weight	AMP DRAW (Nominal/Max)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MIM120	22" x 21" x 32.7" (558 x 534 x 830 mm)	120 lbs (54.4 kg)	35 lbs (15.9kg)	110 lbs (50 kg) 129 lbs (58.5 kg)	7.5A / 11.8A	R-134a 8.47oz (240g)	115V / 60Hz / 1Ph

INSTALLATION ·

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.