

Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



(show with optional casters)

OPTIONS:

- Stainless steel interior
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ High Voltage (380/415/440/480)
- Casters
- ☐ Double stack—shipped assembled
- ☐ Extra oven racks
- ☐ Prison package—tamper proof screws, lexan hinged cover with lockable clasp
- ☐ Extended warranty

	• • •
PRODUCT INFOR	MATION.
	IVIAIII JIV

PRODUCT IN	FORMATION:	
PROJECT:		
ITEM:		
QUANTITY: _		

MODEL:

Duke Convection Ovens Double Deck—Standard Depth—Electric

■ 613-E2 Double deck, standard depth

STANDARD FEATURES

Approval Stamp(s):

- 6 racks/13 rack positions
- Porcelain interior finish
- 65/35 stainless steel doors dependent chain driven
- Double pane glass in 65 door
- 8" angular painted legs/adjustable feet
- 2 speed motor

OVEN SECTION

- Stainless steel front, sides and top
- 1 ½" insulation on bottom, sides and back
- 3" insulation on top
- Interior Lights

OVEN CONTROLS

- □ "V"—Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- "XX"—Solid state digital time and temperature controls, 12-hour countdown timer, Cook and Hold feature, 2-speed fan, Pulse fan capability


Certifications



DUKE MANUFACTURING CO. 2305 N. Broadway


St. Louis, MO 63102 800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com SS-1067-613 E2-Double-Elec

Specification subject to change



DUKE CONVECTION OVENS


DOUBLE DECK—ELECTRIC—STANDARD DEPTH



FLECTRICAL SPECIFICATIONS

Model	208 Volt (Amps)	240 Volt (Amps)	480 Volt (Amps)	KW		
1 Phase	52.8	45.8	n/a	10.0		
3 Phase	30.5	26.5	13.3	10.0		
▲ Electronic connection point						

Note: Electrical Specs above are for only one oven. Each oven has same electrical specifications.

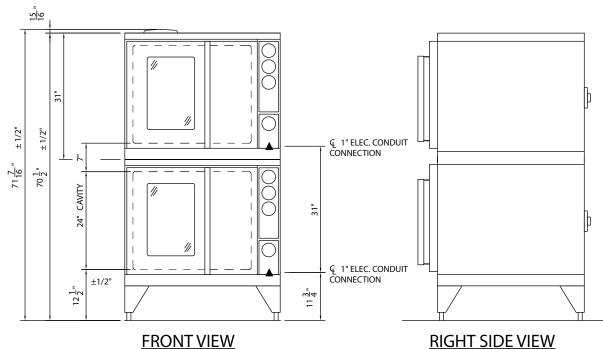

DIMENSIONS:

DIMENSION			Freight Class: 85						
Model	Height top view		nth I		pth t view	Cube ft.	Crated Ship Weight		
	in.	cm	in.	cm	in.	cm	crated	lbs.	kg
613-E2	70 ½	179.1	38	96.5	39 ½	100.3	69.7	1020	464.0



Duke Manufacturing Co.

2305 N. Broadway St. Louis, MO 63102 Phone: 314-231-1130 Toll Free: 1-800-735-3853 Fax: 314-231-5074

www.dukemfg.com