



PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

BLAST CHILLER / BLAST FREEZER / THAWING / RETARDER / SLOW COOKER / WARMER

**BLAST CHILLER / BLAST FREEZER / THAWING / RETARDER / SLOW COOKER / WARMER**

**HI5-8-70U**

**EXCLUSIVE WARRANTY**

- ▶ 3 Year Parts & Labor Warranty
- ▶ 5 Year Compressor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets



**CABINET CONSTRUCTION**

- Stainless Steel Exterior And Interior
- Stay-Open Door Feature For Easy Product Loading
- Snap-In Magnetic Door Gaskets
- 7" Touch Capacitive IPS High Resolution Display
- Circuit Breaker For Compressor Protection
- Automatic Recognition Of Core Probe
- Multi Point Sensor Temperature Display Button
- Core Probe Heater Button
- Infinity Mode Program With Adjustable Set Point
- Automatic Conservation Mode At End Of Cycle

**FEATURES**

- Multi-Functional Unit Offers 5 Distinct Functions: Blast Chill, Blast Freezing, Thawing, Dough Retarder And Slow Cooking
- LCD Color Display For Precise Control Of Chilling And Cooking Cycles
- Cook/Chill Option With Probe Or Timer Setting
- Shock Freezing
- Core Probe Temperature Or Timed Cycle For Blast Chilling Or Shock Freezing
- HACCP Alarm Display Button
- Pre-Cooling Cycle Button
- Holds 99 Program Memory (68 factory pre-set and up to 31 custom programs)
- USB Data Recorder/Interface

**REFRIGERATION**

- Self-Contained Refrigeration System Utilizes R-404 Refrigerant
- Hot Gas Condensate Evaporator
- Adjustable Evaporator Fan Speed Button
- Timed Manual Defrost Button
- Temp Range 194°F / 0°F



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

**OPTIONS & ACCESSORIES**

- Printer Kit
- Removable Sterilizer
- Remote Condensing Unit
- Water Cooled Condenser
- 2" Casters With Brakes

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

## HI5-8-70U

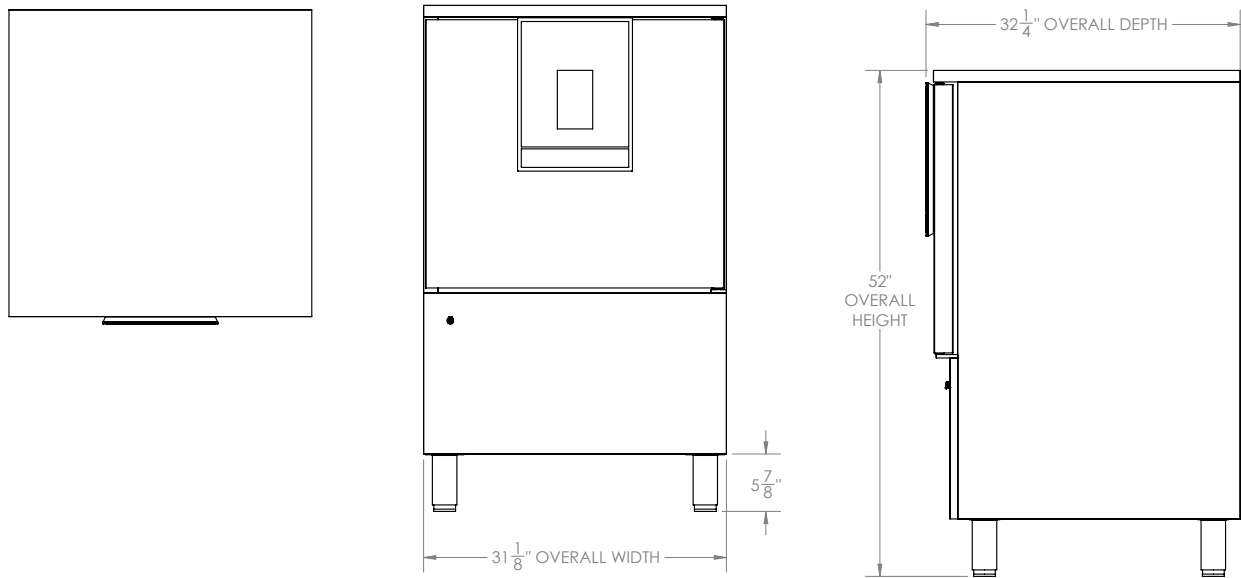

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	33.67	Cabinet Voltage	208-240	Height	60"
Width, Overall (in.)	31 1/8"	Total Amperes	10.1	Width	37"
Depth, Overall (with handle)	32 1/4"	NEMA Plug	6-15P	Depth	37"
Height Overall (in.)	52"	<b>REFRIGERATION DATA</b>		Crated Weight	414 lbs
Depth, Door Open 90°	63"	Condensing Unit Size, HP	1	*NOTE: Remote unit are field wired and comes with 6" legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	28 37/50" x 24 4/5"	Refrigerant	R-404		
Pan Capacity/Pan Size	8 / 18" x 26"	Capacity (BTU/HR) (100°F/20°F)	6435		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.