

# INSTRUCTIONS FOR REPLACEMENT PANELS ON THE MAXIMIZER™ PORTABLE BAR

**Tools Required:** Phillips head screw driver, Flat head screw driver or flat edge tool, Clamp, Drill

1. Set brakes on wheels (operator side). See diagram A.
2. Remove bar top. To remove bar top, unscrew the four screws that are located under outer lip of bar. See diagram A.
3. Remove 2 front bar stantions. To remove stantions, unscrew 2 screws for each stantion that are located on the right-hand and left-hand inside part of bar. See Diagram B.
4. Pop open screw caps located on front panel and each side panel using flat screwdriver or flat edge tool. Remove screws that are housed in the screw caps.
5. Remove all panels.
6. Place corresponding panel that was removed (front side facing up) over replacement panel (front side facing up). Make sure panels edges line up exactly, and then clamp together.
7. Using the removed panel as a template, drill out holes where existing holes were located. Repeat drilling of holes for each panel.
8. Reassemble panels by placing corresponding replacement panel on each side and front of bar unit.
9. Replace screws in each screw cap, tighten and snap cap closed.
10. Replace each stantion and tighten with screws.
11. Replace bar top and secure with four screws.

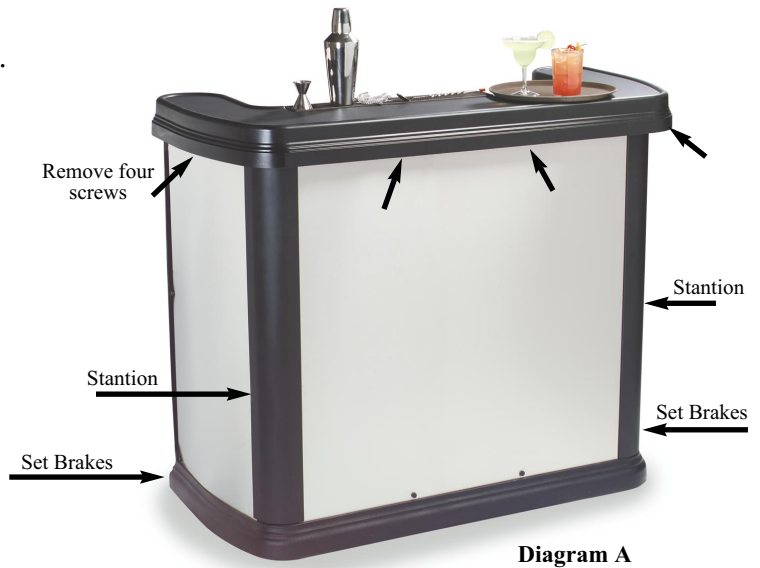


Diagram A

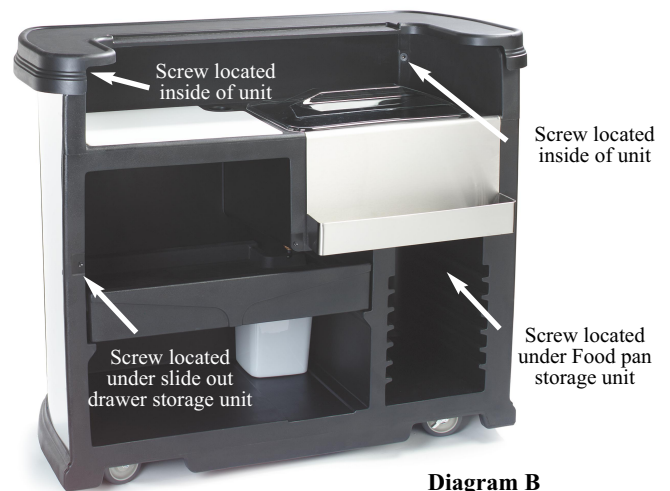


Diagram B

Worldwide Headquarters:  
P.O. Box 53006  
Oklahoma City, Oklahoma 73152-3006  
(405) 475-5600 • FAX (405) 475-5607  
1-800-654-8210  
www.carlislefsp.com

European Distribution Center:  
Edisonstraat 84, P.O. Box 110  
6900 AC Zevenaar, The Netherlands  
Tel +31/(0)316-596550 • Telex 45642  
FAX +31/(0)316-340168  
#104803780

**CARLISLE**  
FoodService Products