



# DOUBLE DECK BANQUET BROILER

TITAN DOUBLE DECK BANQUET BROILER



JBB-236

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JBB-236	DOUBLE DECK INFRARED BROILER
<input type="checkbox"/> JBB-236 R	DOUBLE DECK RADIANT BROILER
<input type="checkbox"/> JBB-236 IR	DOUBLE DECK COMBINATION BROILER

## STANDARD FEATURES

- Supplied with ceramic tile burners
- Eight 26,000 BTU/hr. infrared burners—four burners per deck
- High volume blower providing filtered primary air
- Easy clean washable removable filter
- Two—one per deck—large 2-piece lift out broiler grid (measuring 24-1/4" x 13-1/4" each)
- Grid carriage glides on roller bearing
- Large capacity drip tray—one per tray
- Stainless steel front, sides and top
- 14 gauge stainless steel all welded body construction
- 3/4" rear gas connection with regulator
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs

## ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550  
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





# DOUBLE DECK BANQUET BROILER

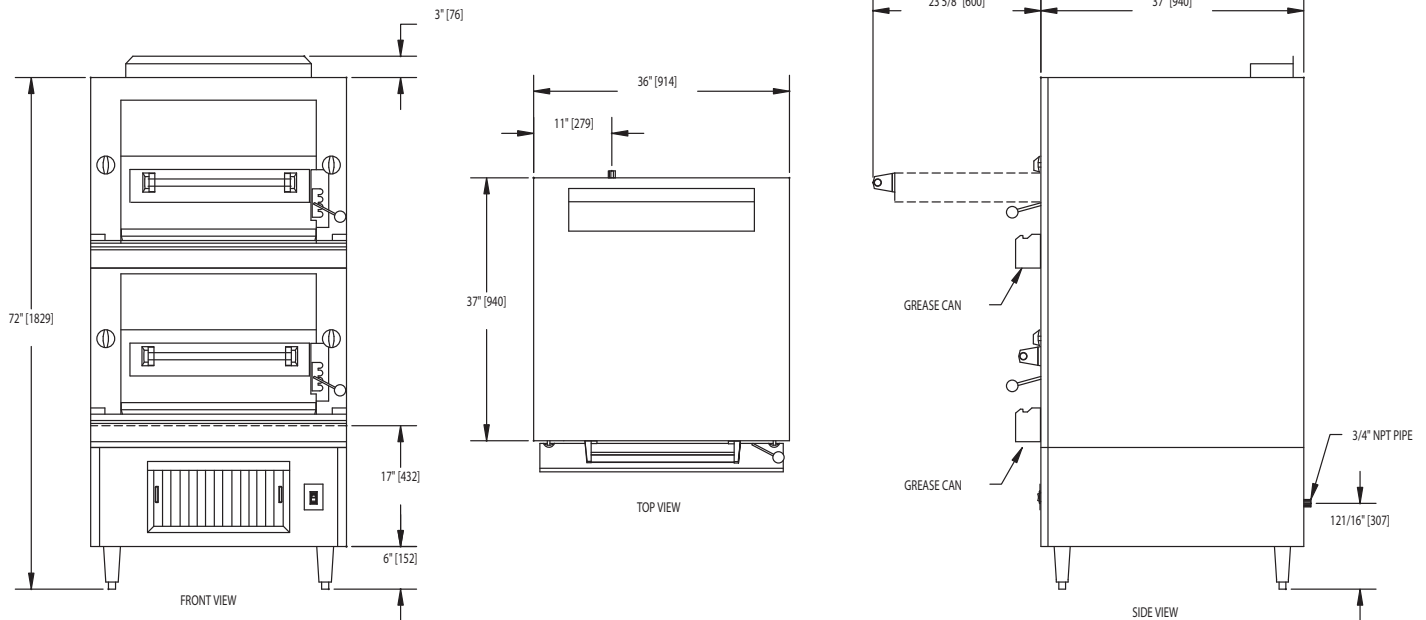

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JBB-236	208,000	36"	38-1/4"	69"	1000 LBS.
JBB-236 R	180,000	36"	38-1/4"	69"	1000 LBS.
JBB-236 IR	194,000	36"	38-1/4"	69"	1000 LBS.

#### ELECTRIC BROILER BLOWER ONLY:

- 6 foot cord with 3 prong plug
- 2.0 amp required

#### DESCRIPTION:

Heavy duty "Banquet" broiler. To be model #JBB-\_\_\_\_\_ manufactured by Jade Range. Provide eight 26,000 BTU/hr. infrared burners. To have two large (2 piece) lift-out broiler grids measuring 24-1/4" x 13-1/4" each—one set per deck. Furnish carriage complete with rolling bearings and multi-action handle. To have 14 gauge all welded body with stainless steel front and sides. All gas tubing to be stainless steel throughout. To have 6" stainless steel adjustable legs.

#### SPECIFY TYPE OF GAS WHEN ORDERING.

#### SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

#### UTILITY INFORMATION:

- 1" or 3/4" capped rear manifold connection. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
  - Natural Gas 5" W.C. minimum
  - Propane Gas 10" W.C. minimum
  - 14" W.C. maximum

**Note:** This unit must be connected with the gas appliance regulator supplied.