



READYFLEX™ HOT HOLDING CABINET

Specifications

F.O.B. Sedalia, Missouri 65301



Model – RFHU-23 2.5" Deep

OPTIONS:

- Front and Back 4.3" Touchscreen
- Front 4.3" Touchscreen w/ Front Timer Bars
- Front 4.3" Touchscreen w/ Front and Back Timer Bars
- Dedicated Lid Options for High Volume Proteins

Electrical

- 120V - 60Hz
- 208/240V - 60Hz
- 220/240V - 50/60Hz

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1201 ReadyFlex Holding Unit 2 inch deep

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

ReadyFlex™ Holding Unit - 2.5" Deep

- RFHU-22 2X2 Configuration
- RFHU-23 2X3 Configuration
- RFHU-24 2X4 Configuration
- RFHU-32 3X2 Configuration
- RFHU-34 3X4 Configuration
- RFHU-41 4X1 Configuration
- RFHU-42 4X2 Configuration

BODY:

- Stainless Steel Exterior construction for durability and ease of cleaning.
- Robust stainless steel pan cover.
- Multipan configuration flexibility for 1/3, 1/2 and Full Size Pans*

* Full Size Pans limited to 3 wide or larger units.

HEATER CONFIGURATIONS:

- Independent Top and Bottom Zoned Heat for maximum recipe flexibility.
- Easy configured for shelf heat, if desired.
- Quick heat up approximately 20 minutes.

CONTROLS:

- Full Color 4.3" Touchscreen Control
 - Easy to Use, Easy to Learn
 - Timer Bar functionality without timer bars.
- Start and Stop Timers
- Displays product being held, countdown timer, cook more alerts, and FIFO for each pan.
- Simplified, Intuitive Local Programming, Recipe Storage, & Menu Switch
- Multipan configuration
- Network Support

Built In Connectivity

- Wi-Fi (Dual Band 802.11 A/B/G/N 2.4Ghz/5Ghz)
- Ethernet (10/100Mbps)


USB Support

- Firmware Update
- Recipe Import/Export

Duke Connected Equipment Platform (DCEP) Support

- Asset Management
- Firmware Update
- Recipe Management
- Diagnostics

Specification subject to change




ReadyFlex™ Holding Unit - 2.5" Deep

Catalog No. Food Warmer

A.I.A. File No. 35-C-13

ReadyFlex™ Holding Unit - 2.5" Deep

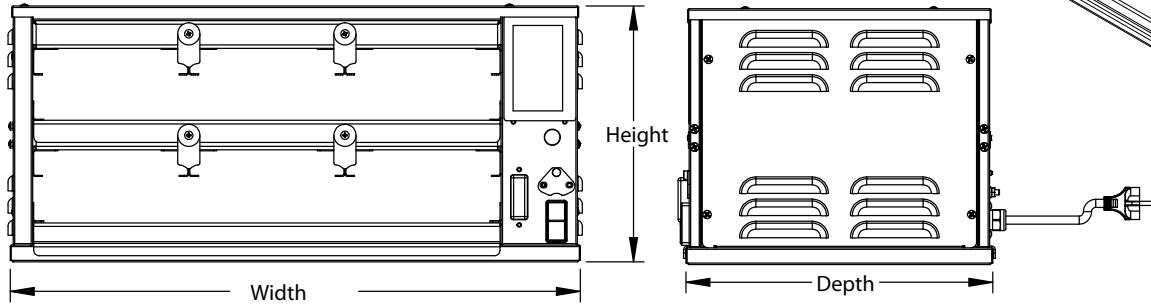

RFHU-23 Shown Above

ELECTRICAL SPECIFICATION/CORD RATING (TOP AND BOTTOM HEAT)

| Model | 120V - 60Hz | | 208/240 V - 60Hz | | 220/240V - 50/60Hz | |
|---------|-------------|-------|------------------|-------|--------------------|----------|
| | Amps | NEMA | Amps | NEMA | Amps | Schuko |
| RFHU-22 | 10 | 5-15P | 5.8/6.7 | 6-15P | 6.7 | CEE7 VII |
| RFHU-23 | 10 | 5-15P | 8.7/10 | 6-15P | 10.0 | CEE7 VII |
| RFHU-24 | 10 | 5-15P | 8.7/10 | 6-15P | 10.0 | CEE7 VII |
| RFHU-32 | 10 | 5-15P | 8.7/10 | 6-15P | 10.0 | CEE7 VII |
| RFHU-34 | N/A | N/A | 13/15 | 6-20P | 15 | CEE7 VII |
| RFHU-41 | 10 | 5-15P | 5.8/6.7 | 6-15P | 6.7 | CEE7 VII |
| RFHU-42 | 10 | 5-15P | 8.7/10 | 6-15P | 10.0 | CEE7 VII |

DIMENSIONS

Freight Class: 100

| Model | 2.5" Deep Pan Config | | | | | | Cubic Ft. Crated | Weight | |
|---------|----------------------|------|-------|------|-------------------|------|------------------|--------|------|
| | Height | | Width | | Depth (body only) | | | lbs | kgs |
| | in. | cm | in. | cm | in. | cm | | | |
| RFHU-22 | 11.8 | 30.0 | 19.0 | 48.3 | 14.1 | 35.7 | 6.8 | 85 | 38.6 |
| RFHU-23 | 11.8 | 30.0 | 26.0 | 66.0 | 14.1 | 35.7 | 8.8 | 100 | 45.4 |
| RFHU-24 | 11.8 | 30.0 | 33.0 | 83.8 | 14.1 | 35.7 | 10.9 | 120 | 54.4 |
| RFHU-32 | 16.6 | 42.2 | 19.0 | 48.3 | 14.1 | 35.7 | 8.3 | 100 | 45.4 |
| RFHU-34 | 16.6 | 42.2 | 33.0 | 83.8 | 14.1 | 35.7 | 13.3 | 160 | 72.6 |
| RFHU-41 | 21.5 | 54.6 | 11.8 | 30.0 | 14.1 | 37.5 | 7.0 | 90 | 40.8 |
| RFHU-42 | 21.5 | 54.6 | 19.0 | 48.3 | 14.1 | 35.7 | 9.8 | 125 | 56.7 |

This product may be covered by one or more patents or pending patent applications. For more details, see www.dukemfg.com/patents



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com