

WxDxH

30" x 24" x 28" Shipping Dimensions

33^{1/4}" x 33^{1/2}" x 34^{1/10}"

Installation Dimension* SRK-15J / SRK-15J3

52^{3/8}" x 19^{1/2}" x 43"

Actual Dimension SRK-15J / SRK-15J3 50^{1/4}" x 17" x 28"

KM EDGE

KMS-1402MLJ

Remote Air-Cooled Shown on optional

Lancer 30" Dispenser

*Dimensions include legs



07/02/24

Item #: Project: ____ Qty: ΔΙΔ#·

Features

Individual crescent cube

Stainless steel evaporator

► CycleSaver[™] design CycleSaver



- Up to 1501 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- EverCheck[™] alert system →
- No heat, less noise
- CFC / HFC Free Foam
- R-404A Refrigerant
- Not recommended for side-by-side application



6

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for


warranty in other countries

	ICE PRODUCTION		WATER	USAGE		ELECTRICAL					
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F		Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Voltage	Circuit Wires (including ground)	Refrigerant Charge Amount	Net / Ship Weight (Ibs.)	
Remote	KMS-1402MLJ with SRK-15J	1501	1400	21.0	N/A	4.3	115V/60/1*	4 [‡]	7.1 oz.	148 /178	
Remote	KMS-1402MLJ with SRK-15J3	1474	1325	22.0	N/A	4.55	115V/60/3*	4	7.1 oz.	148 /178	
* //											

		LINE SETS - Brazing Required			TEMP RANGE		EL	ECTRICAL	supplied from the SRK Remote Condenser					
(Condenser	Model	25' Length	35' Length	55' Length	Ambient (Outdoor Use)	Voltage Range	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (Ibs.)
	Remote	SRK-15J	HS-0250 ⁺	HS-0251 ⁺	HS-0252 [†]	-20 - 122°	187-253VAC	20A	11.3A	208-230V/60/1	4 [‡]	28,400	15 lb. 14 oz.	230 /275
	Remote	SRK-15J3	HS-0250 ⁺	HS-0251 ⁺	HS-0252 ⁺	-20 - 122°	187-253VAC	20A	9.2A	208-230V/60/3	4	28,000	15 lb. 14 oz.	230 /275

1 Line sets require refrigerant. ⁺ If neutral is not available transformer kit (HS-5030) is required. Refer to instruction manual for installation and electrical requirements. See instruction manual for wiring diagram. Power cord not included. Must be hard-wired at site.

KM*Edge*[™]Cube Dimensions*



Operating Limits- KMS-1402MLJ

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F 10 - 113 PSIG
- Water Pressure Voltage Range
- 187-253V‡ • If GFCI is required, a GFCI breaker MUST be used
- in lieu of GFCI receptacle \$ Voltage supply for KMS Ice Maker is supplied from the SRK Remote Condense

- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance and/or service should they be required.
- Panels easily removed and all components accessible for service.

Plumbing- KMS-1402MLJ


- · Icemaker Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

- Service- srk-15J(3) Allow 24" (61 cm) clearance in both front and rear for proper air circulation and ease of maintenance/service.
- For best performance the Remote Condenser should not be more than 33 feet above the icemaker or no more than 10 feet below it. These distances are measure from fitting to fitting. Hoshizaki reserves the right to change specifications without notice.





KMS-1402MLJ 07/02/24 Item # 13252

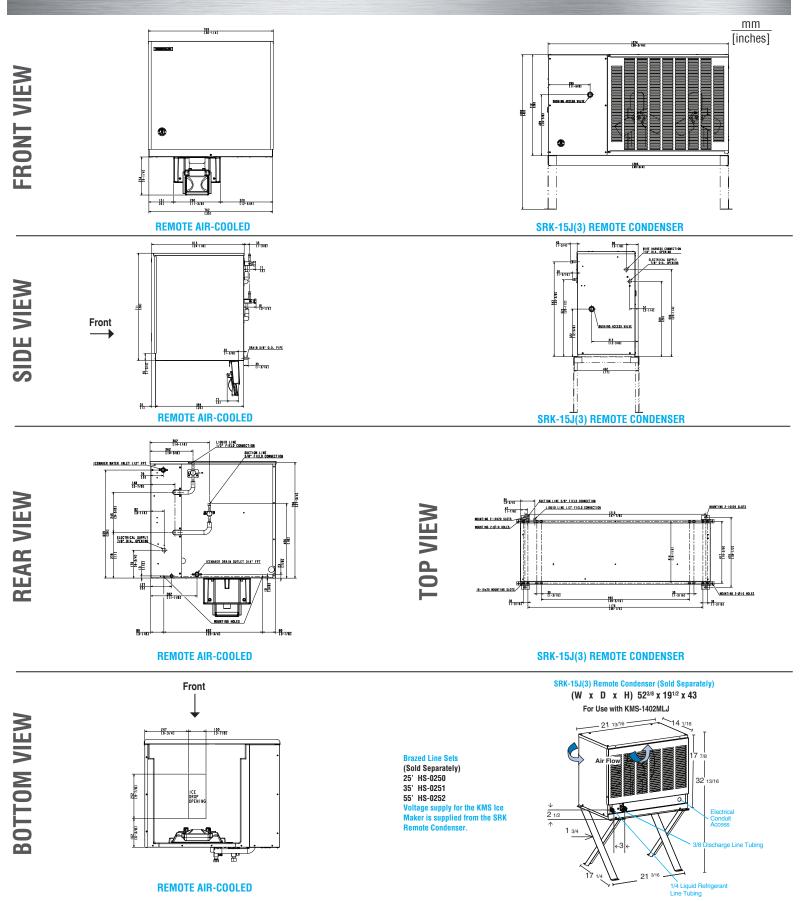

© HOSHIZAKI AMERICA, INC. 618 Hwy, 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com