

## INSULATED STAINLESS STEEL ROLL-IN OVEN WITH RACK MODEL RR-UA16-D

### FEATURES AND BENEFITS:

- Roll-In Rack designed for moving pans from prep area, central kitchen, commissary or cooler into oven.
- Holds (16) sixteen 18 x 26 or (32) 12 x 20 pans.
- Roast, cook, bake, rethermalize and hold with precise temperature and humidity control. Power boosting switch allows end user flexibility to increase or reduce air flow.
- 18,000 or 12,000 Watts of power allows for rethermalization of prepared meals or bulk items. Maximum temperature 350°F. (176.5°C.).
- Standard solid state electronic control with large, clean, easy-to-read and operate LED digital display to ensure holding at precise food temperatures.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Stainless steel construction and smooth interior coved corners for ease of cleaning and to prevent food particle/grease buildup.
- High temperature ceramic magnetic latch for "easy open" and silicone door gasket for proper seal.
- Safety conscious anti-microbial latch protects against spreading germs. Standard with right hand hinging; left hand hinging available upon request.

### POWER UNIT OPTIONS:

- 18,000 Watts, 208 Volts, 3 Phase, 60 Hz.
- 18,000 Watts, 480 Volts, 3 Phase, 60 Hz.
- 12,000 Watts, 208 Volts, 3 Phase, 60 Hz.
- 12,000 Watts, 480 Volts, 3 Phase, 60 Hz.
- 8,000 Watts, 208 Volts, 1 Phase, 60 Hz.

**Deluxe Models (-DX) have 18 factory or field programmed cook & hold cycles. Each programmed menu can be customized for exact time and temperature needs. Probe cooking includes one 3" food temperature probe and port.**



RR-UA16-D

**Standard (-DE)**


All Ovens come standard with easy-to-read and operate LED digital controls.

**Deluxe (-DX)**

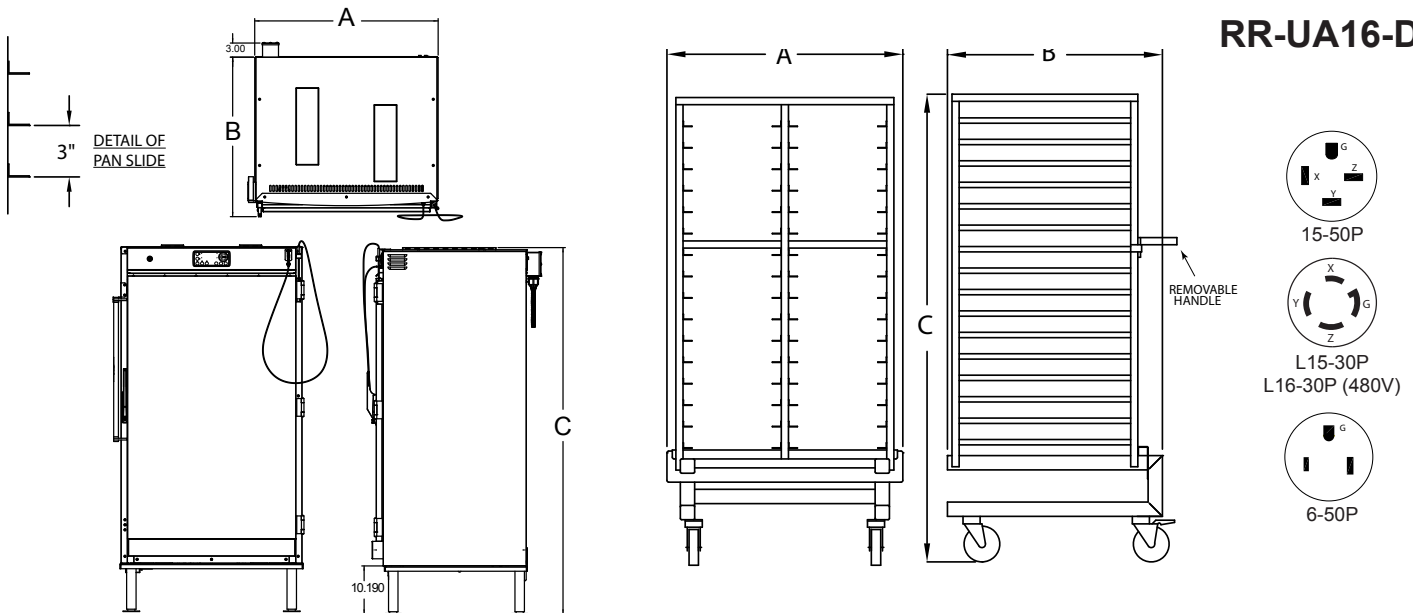

Deluxe Controls are available with 18 programmable menus and 6" food probe.

### ACCESSORIES and OPTIONS (Available at extra cost):

- Deluxe version with 18 programmable menus and 6" meat probe (or optional 3" food probe)
- Security Panel for Controls
- Key Lock Latch
- Wire Baskets
- Extra Roll-In Rack

See page E-10 for accessory details.

# RR-UA16-D



CRES COR MODEL NO.	CAPACITY / SIZE		DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
			WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
RR-UA16-DE RR-UA16-DX	1 RACK	IN	39	33-7/8	77-5/8	32-1/8	28-3/8	56-1/4	LBS	387
		MM	991	859	197	816	721	1429	KG	176
ROR-201-UA16D	16	IN	35-5/8	30-1/4	65-1/2	13-5/8	26	49-1/2	LBS	131
		MM	905	768	1663	346	660	1257	KG	59

INSIDE RACK WIDTH DIMENSION IS FOR ONE SIDE.

## CABINET:

- Body: 22 ga. stainless steel.
- Inner liner: Formed 22 ga. stainless steel.
- Reinforcement: Internal framework of 14 ga. stainless steel channels, welded.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75° F. 1-1/2" in back wall, door, base; 2" in side walls.
- Air tunnels: 20 ga. stainless steel, lift-out type, mounted on inner sides.

## BASE:

- One piece construction, .190 aluminum.
- Legs: Heavy duty polished stainless steel 2" O.D. adjustable for leveling oven.

## DOOR:

- Field reversible.
- Formed 22 ga. stainless steel.
- Latch: Chrome plated high pressure die cast zinc, composite handle, ceramic magnetic.
- Hinges: Heavy duty chrome plated die cast zinc, mounted inboard.
- Door Gaskets: Perimeter type, silicone.

## POWER REQUIREMENTS AVAILABLE:

- 18,000 Watts, 208 Volts, 3 Phase, 60 Hz., 50 Amp. Service
- 18,000 Watts, 240 Volts, 3 Phase, 60 Hz., 50 Amp. Service
- 18,000 Watts, 480 Volts, 3 Phase, 60 Hz., 50 Amp. Service
- 12,000 Watts, 208 Volts, 3 Phase, 60 Hz., 50 Amp. Service
- 12,000 Watts, 240 Volts, 3 Phase, 60 Hz., 50 Amp. Service
- 12,000 Watts, 480 Volts, 3 Phase, 60 Hz., 30 Amp. Service
- 8,000 Watts, 208 Volts, 1 Phase, 60 Hz., 50 Amp. Service
- 8,000 Watts, 240 Volts, 1 Phase, 60 Hz., 50 Amp. Service



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

## ELECTRICAL COMPONENTS:

- Thermostat (retherm/hold): Solid state digital control, 140°F to 350°F (176.5°C).
- Switch: ON-OFF push button type.
- Power cord: Permanent, 8 ft., with: Right angle straight blade plug for 50A., 3Ph., Twist-lock plug for 30A., 3Ph., and Right angle straight blade plug for 50A., 1Ph.
- Heaters (6): 2000 Watts each for 12KW; 3000 Watts each for 18KW.
- Switch: (1) Air volume.
- Blower motors: (6).
- Vent fans: (3).
- Fuses: (2) 6 Amp.

## ROLL-IN RACK (ROR-201-UA16D):

- Angles (16 sets): spaced on 1-1/2" centers.
- 5" dia. swivel, modulus tires, 1-1/4" wide, load cap. 250 lbs. each, temp. range -45°/+180° F. Delrin bearings. Two casters equipped with brakes.

## SHORT FORM SPECIFICATIONS

Cres Cor QuikTherm™ Roll-In Retherm Oven Model RR-UA16-D. 18 ga. stainless steel, recessed control panel. Cabinet and Dutch doors 22 ga. stainless steel; stainless steel internal frame; coved corner interior. Fiberglass insulation in sides 2"; back, doors and base 1-1/2". High temperature anti-microbial magnetic latches. One piece base .190 aluminum. 2" dia. stainless steel legs. Includes Cres Cor Roll-In Rack Model ROR-201-UA16D: (16) universal angles; holds 18 x 26" or 12 x 20 pans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45 to +180°F. 120 Volts, 60 Hz., 1 Phase. 2 year parts warranty. Provide the following accessories: \_\_\_\_ \_\_\_\_ \_\_\_\_ . CSA-US, CSA-C, CSA to NSF4 listed.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936