

Genesis Hot Plates Countertop

▪ G 12 CT - 12 B ▪ G 24 CT - 24 B ▪ G 36 CT - 36 B ▪ G 48 CT - 48 B ▪ G 60 CT - 60 B ▪ G 72 CT - 72 B

100% manufactured from raw materials providing the highest quality and durability

STANDARD FEATURES

- 3-year parts and labor warranty
- LP conversion kit included
- Compact design for countertop use.
- Easy cleaning, corrosion resistant stainless steel finish
- VT Burners (KI awards 2019 and exclusivity on Venancio Ranges)
- Removable 18,000 BTU/h VT Burners providing maximum control , best heat distribution and efficiency in the industry.
- Full width stainless steel crumb trays catch all spillage
- 6" deep front stainless steel bull nose-rail is safely flush with the cook tops and functional to straddle pots, skillets, plates and also serves as control protection.
- Heavy gauge welded frame construction provides stability and durability
- Standing pilot for each burner protected from spills
- 12" x 12" heavy duty cast iron top grates designed for easy movement of pots across top sections.
- Stainless steel front and sides
- Metal Chrome knobs with red stripe
- Gas shut off valve ¾" NPT
- 4" highly polished chrome adjustable steel legs



Model G 36 CT - 36 B

OPTION & ACCESSORIES

- Modular belly rail accessory for 1/6 pans
- Cutting Board
- Quick disconnect (3/4 Flex hose 4' long)
- Stainless Steel Equipment stand
- 18"-72" Stands
- 6" levelling swivel casters (2) with front locking for the stand, (3) for R60/72.



Genesis Hot Plates Countertop


SPECIFICATIONS

- Removable 18,000 BTU/h VT Burners providing maximum control , best heat distribution and efficiency in the industry
 - ¾" NPT rear gas connect and pressure regulator for both natural gas and propane
 - Manifold pressure is 4" W.C. (Natural Gas) or 10" W.C. (Propane Gas)
 - Each burner is controlled by a gas valve for independent control of flame
 - Gas shut off valve ¾" NPT.
 - One standing pilot services each burner.
 - 4" highly polished chrome adjustable steel Legs
- Brushed stainless steel front and sides



Rev 02 (Out/2019)

▪ G 12 CT - 12 B ▪ G 24 CT - 24 B ▪ G 36 CT - 36 B ▪ G 48 CT - 48 B ▪ G 60 CT - 60 B ▪ G 72 CT - 72 B

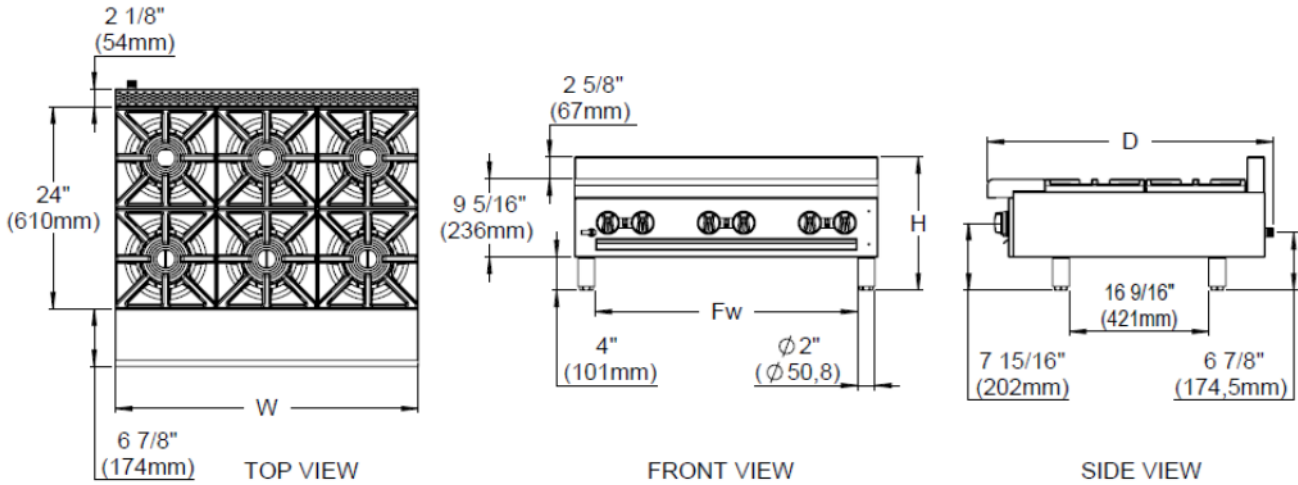

Model	Exterior Product Dimensions & Weight					Shipping Crate Dimensions & Weight			
	Width	Depth	Height	Fw	Weight	Width	Depth	Height	Weight
G 12 CT - 12 B	12" (305 mm)	34" (864 mm)	15 15/16 " (405 mm)	7 1/4" (184 mm)	115 lb (52 kg)	16 5/32 " (410 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	143 lb (65 kg)
G 24 CT - 24 B	24" (610 mm)	34" (864 mm)	15 15/16 " (405 mm)	19 1/4" (489 mm)	198 lb (90 kg)	28" 5/32 (715 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	245 lb (111 kg)
G 36 CT - 36 B	36" (915 mm)	34" (864 mm)	15 15/16 " (405 mm)	31 1/4" (794 mm)	282 lb (128 kg)	40 5/32 " (1020 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	346 lb (157 kg)
G 48 CT - 48 B	48 1/32" (1220 mm)	34" (864 mm)	15 15/16 " (405 mm)	43 1/4" (1099 mm)	366 lb (166 kg)	52 5/32 " (1325 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	441 lb (200 kg)
G 60 CT - 60 B	60 1/32" (1525 mm)	34" (864 mm)	15 15/16 " (405 mm)	55 1/4" (1404 mm)	454 lb (206 kg)	64 3/16 " (1630 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	545 lb (247 kg)
G 72 CT - 72 B	72 1/32" (1830 mm)	34" (864 mm)	15 15/16 " (405 mm)	67" 9/32 " (1709 mm)	540 lb (245 kg)	76" 3/16 (1935 mm)	37 13/32 " (950 mm)	22 27/32 " (580 mm)	646 lb (293 kg)

UTILITY INFORMATION

GAS SUPPLY

Model	Burners	Gas (BTU/h)	
		Natural	Propane
G 12 CT - 12 B	2	36,000	36,000
G 24 CT - 24 B	4	72,000	72,000
G 36 CT - 36 B	6	108,000	108,000
G 48 CT - 48 B	8	144,000	144,000
G 60 CT - 60 B	10	180,000	180,000
G 72 CT - 72 B	12	216,000	216,000

Manifold Pressure	
Natural Gas	Propane gas
4" W.C.	10" W.C.

- 3/4" NPT rear Gas inlet.
- Specify elevation, If over 2000 ft

CLEARANCES REQUIREMENTS

- Provide sides and rear clearance 0" (0 mm) from non-combustible surfaces. 6" (152.4 mm) – sides and 8" (203.2 mm) – rear, clearance from combustible surfaces .

MISCELANEOUS

- Install under vented hood.
- Check local codes for fire, installation and sanitary regulations
- Intended for commercial use only. Not for household use

