#### iMIX®-5S+

Height: 32.8" Width: 19.3" Depth: 24.0" (83.3cm) (49.0cm) (61.0cm)



- 7gal (26.5L) hot water tank to meet peak serving times
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information
- Can be set as push and hold or single size portion control
- · Capacity: Five 8lb (3.6kg) hoppers
- Cup clearance at 7.25" (18.4cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6cm)]
- Easily removable side panels for complete access to service components
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service set up and calibration
- High speed heavy-duty whipper for complete product mixing
- High efficiency LED lighted front graphics for merchandising
- Spring-loaded, all metal auger drive system for easy hopper installation
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second)

Additional Features

#### Agency:





#### **Specifications**

Product #: 38100.0003 Door: Side Hinge

Finish: Black
Dispense: Portion Control

Hoppers: Five
Dispense: Push Button

Water Access: Plumbed

### **Electrical & Capacity**

| Volts* | Amps | Watts | Cord<br>Attached | Plug Type  | Plug Type  8oz cups/hr 236ml cups/hr |               | Phase | # Wires<br>plus Ground | Hertz |
|--------|------|-------|------------------|------------|--------------------------------------|---------------|-------|------------------------|-------|
| 120    | 15   | 1800  | Yes              | NEMA 5-15P | 72                                   | 60°F (15.5°C) | 1     | 2                      | 50/60 |

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

#### Plumbing Requirements


| PSI    | kPa     | Fitting Supplied        | Water Flow Required (GPM) |  |  |  |  |
|--------|---------|-------------------------|---------------------------|--|--|--|--|
| 20-100 | 138-689 | 1/4" Male Flare Fitting | -                         |  |  |  |  |

#### **CAD Drawings**

| 2D | Revit | KLC |
|----|-------|-----|
| •  | •     | •   |

MARNING:



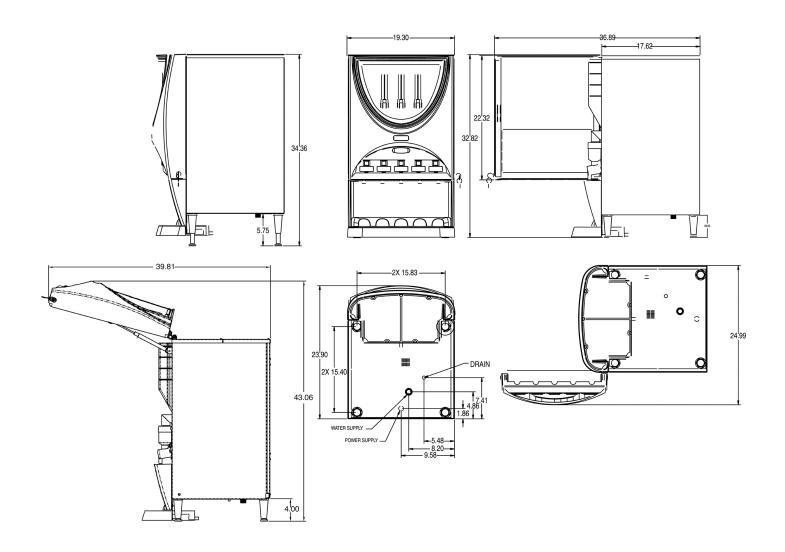


|         | I        | Unit     |          | Shipping |       |       |             |        |
|---------|----------|----------|----------|----------|-------|-------|-------------|--------|
|         | Height   | Width    | Depth    | Height   | Width | Depth | Weight      | Volume |
| English | 32.8 in. | 19.3 in. | 24.0 in. | -        | -     | -     | 131.550 lbs | -      |
| Metric  | 83.3 cm  | 49.0 cm  | 61.0 cm  | -        | -     | -     | 59.671 kgs  | -      |



## Related Products & Accessories:iMIX®-5S+(38100.0003)

























# Serving & Holding Options: iMIX®-5S+(38100.0003) \*Serving and Holding selections are currently unavailable. Please centact your sales in

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

