

Refrigeration Equipment 2-Glass Door Back Bar Refrigerator Black 49" Long

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738272 (KCHBB48G)

2-Glass Door Back Bar
Refrigerator Black 49" Long

Short Form Specification

Item No. _____

2-glass door Back bar refrigerator. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- Two Shelves for 48" Back Bar (1 Right & 1 Left) PNC 880608
- Shelf clips (4-pack) PNC 880611

APPROVAL: _____

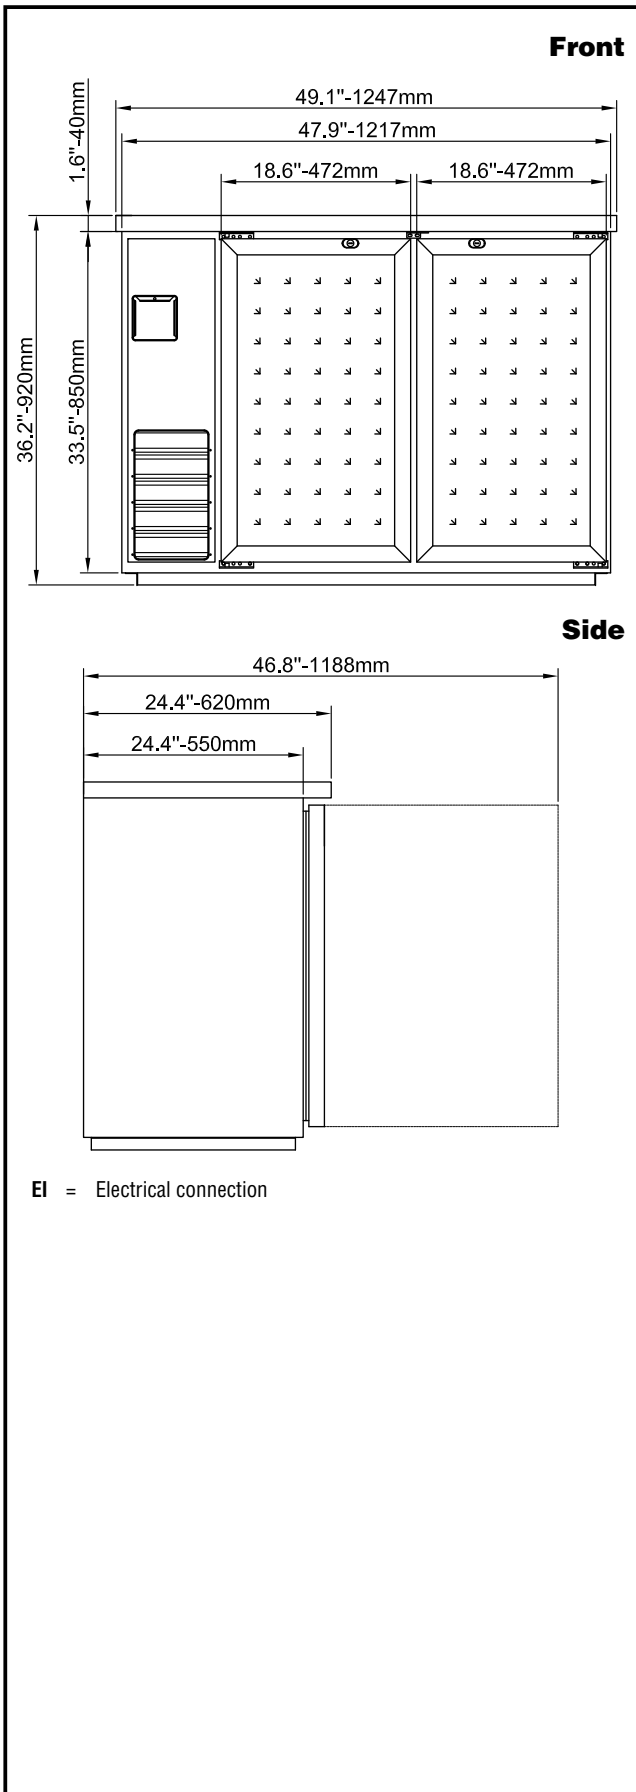

Electric

| | | |
|-------------------------------|-------------------|------------------|
| Supply voltage: | 738272 (KCHBB48G) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.31 kW |
| Plug type: | | USA NEMA 5-15P |

Capacity:

| | |
|------------------------|--------------|
| Gross capacity: | 12.5 cu.feet |
|------------------------|--------------|

Key Information:

| | |
|---|--|
| Door hinges: | 1 Left+1 Right |
| External dimensions, Width: | 49 1/16" (1247 mm) |
| External dimensions, Depth: | 24 7/16" (620 mm) |
| External dimensions, Height: | 36 3/16" (919.48 mm) |
| Number and type of doors: | 2 Glass |
| Internal Dimensions (depth): | 20 " / (508 mm) |
| Internal Dimensions (height): | 28 " / (711.2 mm) |
| Internal Dimensions (width): | 36 " / (914.4 mm) |
| Shipping height: | 41 5/16" (1050 mm) |
| Shipping weight: | 284 lbs (129 kg) |
| Shipping volume: | 32.45 ft ³ (0.92 m ³) |
| Number and type of grids (included): | 4 - Vinyl-Coated Steel |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |
| Approvals | ETL C&US;ETL SANITATION |

Refrigeration Data

| | |
|------------------------------------|--------------|
| Compressor power: | 1/5 hp |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |
| Defrost type: | Auto Defrost |

Sustainability

| | |
|-----------------------------|--------|
| Current consumption: | 3 Amps |
| Refrigerant type: | R290 |
| GWP Index: | 3 |
| Refrigerant weight: | 110 g |



Refrigeration Equipment 2-Glass Door Back Bar Refrigerator Black 49" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.