BACK BAR EQUIPMENT

Model: **BB79NPT**

Natural Refrigerant R-290 Model

79" Back Bar Cooler, Pass-Thru

Textured baked black enamel finish exterior, stainless steel countertop, interior back and side panels with reinforced stainless steel floor.



Options and Accessories

| (upcharge and lead times may apply) | | |
|---|--------------------------|--|
| Additional epoxy coated shelves | Condensing unit on right | |
| Stainless steel shelves | Wine rack | |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs | |
| Riser base* (field installed) | Shallow depth | |
| Hinged glass doors (consult factory) | | |
| | | |

Consult factory for other model configurations, options and accessories.

 * Adding a Riser Base increases overall height 2"



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name: | | |
|------------------|-----------|--|
| | | |
| Model Specified: | | |
| | | |
| Location: | | |
| | | |
| Item No: | Quantity: | |
| | | |
| AIA #: | SIS #: | |

Standard Model Features

REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Front, rear and side venting louvered grills Magnetic snap in Santoprene™ door gaskets Cylinder keyed security lock in each door Stainless steel reinforced threshold

MODEL FEATURES

| Low profile cabinet design |
|---|
| Electronic controller with digital display & hi-low alarm |
| LED interior lighting |
| Off-cycle defrost |
| Easily accessible and serviceable slide-out condensing unit |
| |

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

Model Plan Views



| Net Capacity (cubic feet) | 28 (793 cu l) |
|--|---------------|
| Width, Overall (inches) | 79 (2007 mm) |
| Depth, Overall (inches) (including handles) | 31 ¾ (797 mm) |
| Depth, Body Only (inches) (less doors) | 25 (635 mm) |
| Height, Overall (inches) | 34 ¾ (883 mm) |
| Capacity: # Barrel Kegs | 3 |
| Capacity: # Straight Wall Kegs | 4 |
| Capacity : # 1/6 Size Kegs | 14 |
| Number of Doors | 6 |
| Number of Shelves | 6 |
| | |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1⁄4+ |
|-----------------------------|------|
| Capacity (BTU per hour)* | 2500 |

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|--|---------------------|
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 5.8 (4.9) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| Weight (pounds) | 455 (206 kg) |
|--------------------------|--------------|
| Height - Crated (inches) | 46 (1168 mm) |
| Width - Crated (inches) | 88 (2235 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.


Toll-Free: 800-523-7138

Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

Designed and ed in the USA







Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

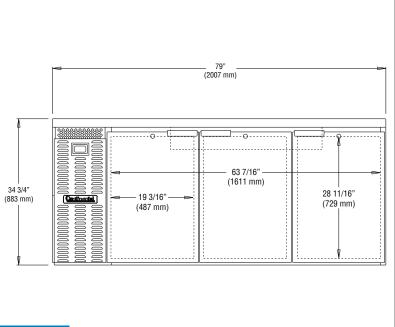

FRONT VIEW

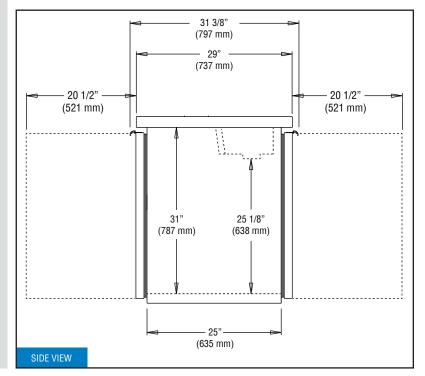

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front and back of the cabinet must not be obstructed in any way. A clearance of 3" on the sides is recommended.