

WASH AND STORE DISHWASHER

The WS1000 Wash and Store Dishwasher is a revolution in commercial dishwasher design. The passthrough double-door design allows the unit to be loaded and unloaded from both sides for maximum flexibility. An innovative drying system allows you to immediately use dishes after a cycle ends. With a space-saving design, ultra-low sound output and minimal heat loss, the WS1000 is the ultimate dishwashing solution.

FEATURES

- Double Door – One or Both Sides
- Heat-resistant Glass Doors
- Double-wall construction with thermo-acoustic insulation
- Front-loading drawer for chemical dosing and monitoring
- Programmable Start
- Cold-fog drying system
- Insulated AISI 316 Wash Tank with 4 independent self-cleaning pumps

CONTROLS / DISPLAY

- Front mounted controls
- Easy to read and simple to operate

CONSTRUCTION & FINISH

- Heavy duty stainless steel construction
- Internal cavity and exterior panels – 304 stainless steel

DRAIN PUMP

- Built in drain pump provides versatility for installation locations
- 43W hMAX 31 1/2" (10, 56 gal(US)/min**)
 - ** Maximum Flow Rate

PUMP POWER

- 1.5 HP/ 1120W (166 gal (US) / min***)
 - *** Maximum Flow Rate



RACK SIZES:

Dish Rack	20in x 20in	508mm x 508mm
Dish Max Height	12.25 in	311mm
Plates Diameter	16.25in	412.75mm

WATER CONSUMPTION (Standard Mode)

34 gal / 128 L

OPERATING CYCLE:

9-216 Minutes, depending on mode

CYCLE TEMPERATURES (Standard Mode)

Wash	165°F	74°C
Rinse	185°F	85°C


WATER REQUIREMENTS

Inlet Temperature	131°F	55°C
Inlet Water Pressure	25-60psi	1.8 – 4.2kg/cm ²
Flow Pressure	15-25psi	1.0 – 1.8kg/cm ²

All specifications are dependent on water pressure and temperature



WASH AND STORE DISHWASHER

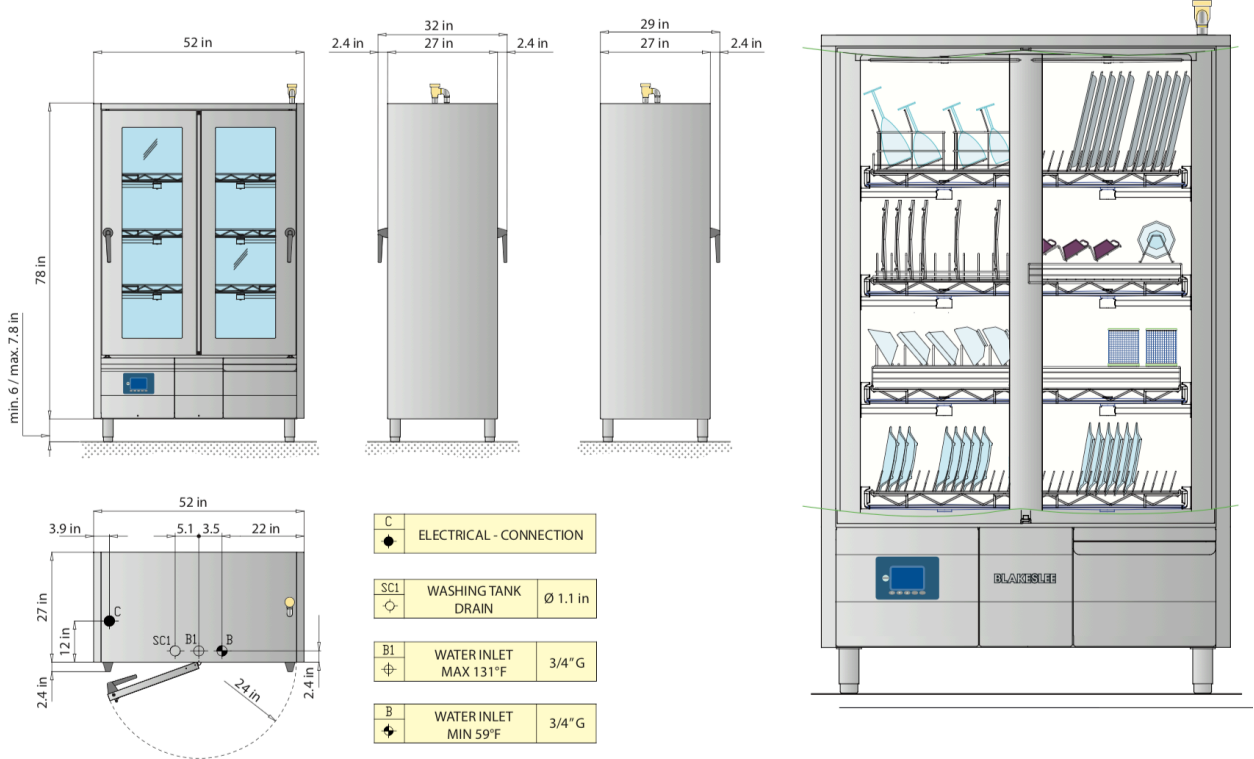

ELECTRIC

Voltage/Hertz/Phase 208-240V/60/1

Power Required 6.5 kW