



SS10 SERIES-11 QUART TOP-MOUNT, ROUND DROP-IN WARMERS



SS10TDU

DESCRIPTION

The heavy-duty, top-mount, drop-in round food warmers are designed to hold heated foods at safe and fresh serving temperatures. Wells SS10 Series accommodates standard 11 quart, round, inset, pans and are designed for wet or dry operations.

STANDARD FEATURES

- Accommodates standard 11-quart Insets
- One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans.
- Suitable for wet or dry operation
- Energy-saving, fully insulated models or standard non-insulated models
- Fully insulated models are perfect for non-metal counters (with adapter kit)
- Thermostatic or Infinite Controls
- High limits prevent overheating
- Infinite controls provided w/guard ring to prevent temperature change
- Thermostatic controls are recessed in a one-piece, front-mounted panel
- Wellslock is standard for easy installation
- Powerful tubular heating elements
- 1/2" drains available
- 1-Year Limited Parts & 1-Year Limited Labor Warranty

SPECIFICATIONS

Construction – One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models.

Wellslocks are standard for quick and easy installation.

Insulation – Choose between models that are fully insulated around the sides and bottom or standard non-insulated models. Fully Insulated models save energy and may be installed in non-metal counters.

Controls & Heating – Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

OPTIONS & ACCESSORIES

- Inset with lid
- 8 oz. soup ladle
- Drain valve extension kit
- Adaptor top for 4-quart inset
- Adaptor top for 7-quart inset
- Non-metal counter adapter kit
- Optional 72" control wiring

ADDITIONAL FEATURES AVAILABLE

- 120V or 208/240V
- Drains
- Cord & plugs
- Fully insulated models or standard models
- Infinite or thermostatic controls

WARRANTY

These units come with a one [1] year warranty for parts and labor.

MINIMUM CLEARANCES	BACK (MM)	SIDE (MM)	BOTTOM (MM)	FRONT (MM)
STANDARD	1" (25)	1" (25)	8-1/2" (216)	4"* (102)
FULLY INSULATED	1" (25)	1" (25)	8" (203)	4" (102)

*When control box is located below the warmer, front clearance may be reduced to 2" or 52 mm



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166




















Telephone 800 264 7827 • Fax 314 781 5445

www.wells-mfg.com

Printed in the U.S.A. • 2M-Z21335 • REV B • (01-22)
Specifications are subject to change without notice and are not intended for installation purposes.



SS10 SERIES-11 QUART TOP-MOUNT, ROUND DROP-IN WARMERS

SPECIFICATIONS										
MODEL	CONTROLS	INSULATION	INSTALL WT	SHIP WT	VOLTAGE	WATTS	PHASE	PLUG	DRAIN	APPROVAL
SS10D-120	Infinite	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	450	1Ø	N/A	Yes	NSF c 
SS10D	Infinite	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	208V/240V	620/825	1Ø	N/A	Yes	NSF c 
SS10T-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	N/A	No	NSF c 
SS10T	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	208V/240V	620/825	1Ø	N/A	No	NSF c 
SS10TD-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	N/A	Yes	NSF c 
SS10TD	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	208V/240V	620/825	1Ø	N/A	Yes	NSF c 
SS10TU-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	N/A	No	NSF c 
SS10TU	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	208V/240V	620/825	1Ø	N/A	No	NSF c 
SS10TDU-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	N/A	Yes	NSF c 
SS10TDU	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	208V/240V	620/825	1Ø	N/A	Yes	NSF c 
SS10TUC-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	NEMA 5-15P	No	NSF c 
SS10TDUC-120	Thermostatic	Non-Insulated	6 lbs./2.8 kg	7 lbs./3.2 kg	120V	825	1Ø	NEMA 5-15P	Yes	NSF c 
SS10TUI-120	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	120V	825	1Ø	N/A	No	NSF c 
SS10TUI	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	208V/240V	620/825	1Ø	N/A	No	NSF c 
SS10TDUI-120	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	120V	825	1Ø	N/A	Yes	NSF c 
SS10TDUI	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	208V/240V	620/825	1Ø	N/A	Yes	NSF c 
SS10TUCI-120	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	120V	825	1Ø	NEMA 5-15P	No	NSF c 
SS10TDUCI-120	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	120V	825	1Ø	NEMA 5-15P	Yes	NSF c 
SS10TDUCI	Thermostatic	Fully Insulated	11.4 lbs/5.2 kg	12.4 lbs./5.6 kg	208V/240V	620/825	1Ø	NEMA 6-15P	Yes	NSF c 

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

CERTIFICATIONS



WELLS MANUFACTURING INTERNATIONAL INC.
 265 Hobson Street • Smithville, Tennessee 37166
 Telephone 800 264 7827 • Fax 314 781 5445
www.wells-mfg.com


Printed in the U.S.A. • 2M-Z21335 • REV B • (01-22)
 Specifications are subject to change without notice
 and are not intended for installation purposes.



SS10 SERIES-11 QUART TOP-MOUNT, ROUND DROP-IN WARMERS




PRODUCT DIMENSIONS
FOR STANDARD MODELS
ONLY

INCHES
(MM)



THIS CONTROL PANEL IS
FEATURED ON UL CERTIFIED
MODELS ONLY

Shown with
thermostatic control

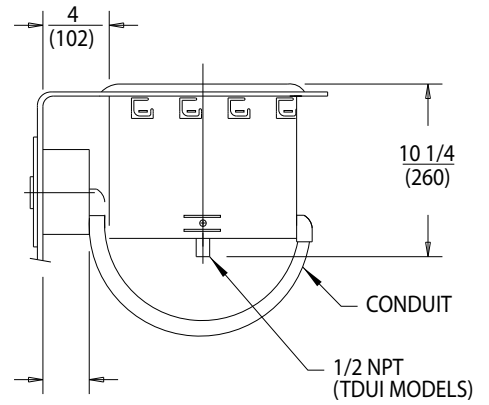

THIS CONTROL PANEL IS
FEATURED ON UL CERTIFIED
MODELS ONLY

Shown with
thermostatic control

