

ELECTRIC, TWO-PAN DECK [BAKE] OVENS

MODEL: DO54B [1,2,3] M



Model DO54B2M shown

PAN & PRODUCTION CAPACITY GUIDE

Capacity/Model:	DO54B1M*	DO54B2M	DO54B3M
18"x26" Full Sheet	2	4	6
Pies-9"	12	24	36
Bread-1 lb. loaves	20	40	60

*Or the DO54BM Model

SHORT/BID SPECIFICATION

Range shall be a LANG Manufacturing Marine Model DO54B_M [Specify 1, 2, or 3], a 6-kW [each] electric heated two-pan bake oven, with: 8" high cooking compartment; full-width, spring loaded pull-down door, all stainless steel exterior; insulated, aluminized steel cooking compartment; one heavy duty pan rack standard; plus all the features listed and options/accessories checked.

STANDARD PRODUCT WARRANTY

One year, parts & labor [Labor in U.S. only]

CONSTRUCTION FEATURES

- Heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- Cooking compartment is aluminized steel and fully insulated on six sides
- Heavy duty spring-loaded pull-down door with grab-bar handle
- Recessed, right side mounted control panel
- 27" [DO54B1M], 16" [DO54B2M] or 6" high [DO54B3M] legs standard
- One heavy duty chrome plated wire rack provided

PERFORMANCE FEATURES

- Top & bottom mounted heating elements enclosed in Incoloy sheathing
- Stackable up to three high, for more capacity in same footprint
- 20" high oven reduces loading height of upper stacked units
- Reinforced oven deck with raised edges eliminates warping
- Sturdy pull-down door serves as loading platform
- 100-550° F operating temperature range

CONTROLS PACKAGE [Per Deck]

- Simple knob-set time and temperature controls
- 3-heat switch for: top only, bottom only or heat from both
- 60 minute timer
- Manual vent rod



Electric, Two-Pan Deck [Bake] Ovens


Model: DO54B[1,2,3]M

INSTALLATION REQUIREMENTS

- 208V or 240V, 1-Phase or 3-Phase power required; or 480V 3-Phase as option
- Consult local and marine codes
- Installation under approved vent hood required
- [Power connection from bottom. See below]

OPTIONS

- 480 Volt, 3-Phase model, per oven deck
- 27" stainless steel angular legs for DO54B1M Model
- 16" stainless steel angular legs for DO54B2M Model
- 6" stainless steel angular legs for DO54B3M Model
- Extra wire pan racks [one provided as std., per oven deck]

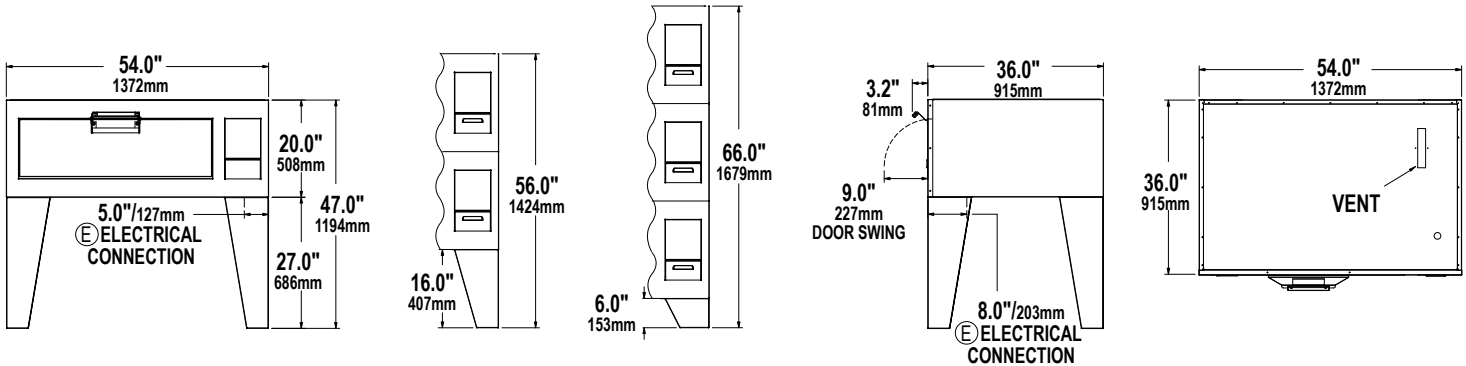

Model	Height x Width x Depth (without legs)		Clearance from combustible surface*	Weight		Freight Class
	External	Inside Oven Dimension		Actual	Shipping	
DO54B1M	20.0" x 54.0" x 36.0" 508mm x 1372mm x 915mm	8.0" x 38.0" x 30" 203mm x 965mm x 762mm	Sides: 2.0" (51mm) Back: 2.0" (51mm)	390 lb 177 kg	430 lb 195 kg	70
DO54B2M	20.0" x 54.0" x 36.0" 508mm x 1372mm x 915mm	8.0" x 38.0" x 30" 203mm x 965mm x 762mm	Sides: 2.0" (51mm) Back: 2.0" (51mm)	705 lb 320 kg	785 lb 357 kg	70
DO54B3M	20.0" x 54.0" x 36.0" 508mm x 1372mm x 915mm	8.0" x 38.0" x 30" 203mm x 965mm x 762mm	Sides: 2.0" (51mm) Back: 2.0" (51mm)	1045 lb 475 kg	1165 lb 530 kg	70

*Noncombustible floor only.

Voltage	ⓔ Electrical Requirements By Model						
	Phase	Model DO54B1M		Model DO54B2M		Model DO54B3M	
		Total kW	Amps/Line	Total kW	Amps/Line	Total kW	Amps/Line
208V/60Hz	1	6.0	28.8	12.0	57.7	18.0	86.5
240V/60Hz	1	6.0	25.0	12.0	50.0	18.0	75.0
208V/60Hz	3	6.0	28.8	12.0	50.0	18.0	57.7
240V/60Hz	3	6.0	25.0	12.0	43.3	18.0	43.3
480V/60Hz	3	6.0	12.5	12.0	21.7	18.0	21.7

Due to continuous improvements, specifications subject to change without notice

