




FEATURES

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Stainless steel framework construction
- Magnetic door gaskets can be replaced without any tools
- Doors have lock and key
- Easy to mount 4" casters (two lockable in front) are standard with all units
- Mono-block unit
- Top: 430 stainless steel
- Interior: 430 stainless steel with 304 stainless steel floor
- Exterior: Heavy duty, wear resistant black paint
- Temperature: 33 to 41°F / 0.5 to 5°C
- Electrical: 115/60/1 with NEMA 5-15P plug
- EMP-KBB-48-2G-24 contains : 48 x 6 pkgs of 12 oz. cans or 216 12 oz. bottles

TECHNICAL DRAWINGS

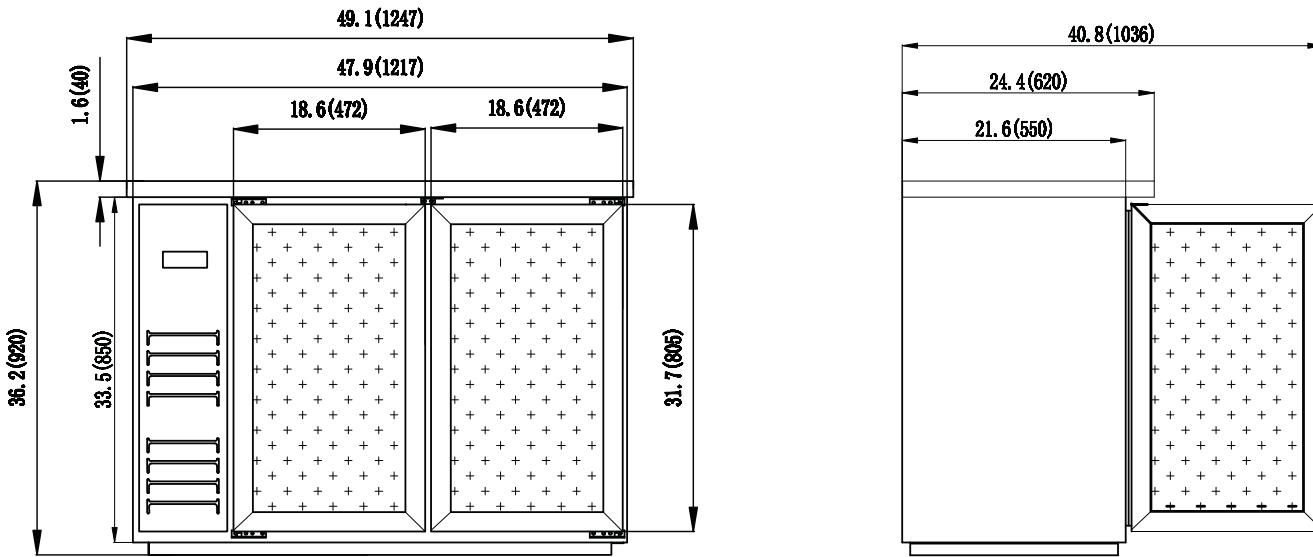

Dimensions in inches (mm)

SPECIFICATIONS:

Model:	EMP-KBB-48-2G-24
Ext. Dimensions:	(W x D x H) 49.1" x 24.4" x 41.7"
Int. Dimensions:	(W x D x H) 36" x 20.01" x 29.37"
Doors	2
Amps:	4.5
Compressor Size (HP)	3/8
Shipping Weight:	307 lbs



Warranty: 24 months parts & labor. Additional 36 months on compressor (part only).

CERTIFIED TO ANSI/NSF-7 STANDARDS