

Item # \_\_\_\_\_ Qty # \_\_\_\_\_ Model # \_\_\_\_ Project # \_\_





# **FRYER FOUR TUBE BURNER** DCF4-LPG / DCF4-NG





FRYER Model	DIMENSION			
	Width	Depth	Height	
DCF4-NG	15 1/2 in	32 7/8 in	45 in	
DCF4-LPG	15 1/2 in	32 7/8 in	45 in	



## PRODUCT DESCRIPTION

- Four highly efficient red tube, cast iron burners create a large heat-transfer area for reliable, even heat distribution. Our durable temperature probe senses temperature changes and activates a quick burner response.
- The temperature for the DCF4-LPG/DCF4-NG from 200°F (93°C) to 400°F (204°C). Includes Millivolt safety control system.
- $^{ullet}$  Every inch of the frypot and cold zone can be cleaned and wiped down by hand.
- The large cold zone and forward sloping bottom help collect and remove sediment from the frypot to safeguard oil quality and support routine frypot cleaning.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey




1-800-931-8628


(a) info@dukersusa.com


www.DukersUSA.com

# **DETAILS &**SPECIFICATIONS

### FRYER DCF4-LPG / DCF4-NG

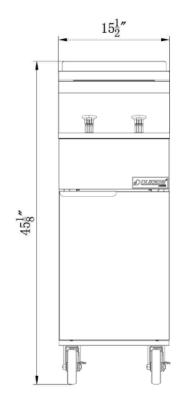

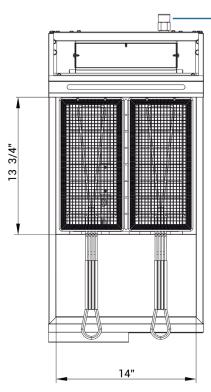

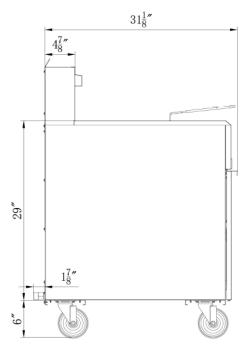

3/4" NPT Gas Inlet

**Front View** 

**Top View** 

**Side View** 

### DCF4-LPG

**GAS SOURCE LPG WORK AREA** 14.01x13.98in **BURNER** 4 count 30000 BTU/H SINGLE BURNER **COMBINED** 120000 BTU/H **OIL TANK CAPACITY** 50 lbs 10 "WC **GAS PRESSURE NOZZEL** 52# **CONTAINER FITMENT** 130

### DCF4-NG

NG **GAS SOURCE** 14.01x13.98in **WORK AREA BURNER** 4 count 30000 BTU/H SINGLE BURNER **COMBINED** 120000 BTU/H **OIL TANK CAPACITY** 50 lbs 4 "WC **GAS PRESSURE NOZZEL** 39# **CONTAINER FITMENT** 130

Model -	Packaging Dimensions (inches)		Net Weight	Ship Weight	
	W	D	Н	(lbs)	(lbs)
DCF4-LPG DCF4-NG	17 7/8" 17 7/8"	35 3/8" 35 3/8"	37 5/8" 37 5/8"	176.37 176.37	198.42 198.42









Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey

www.DukersUSA.com