




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

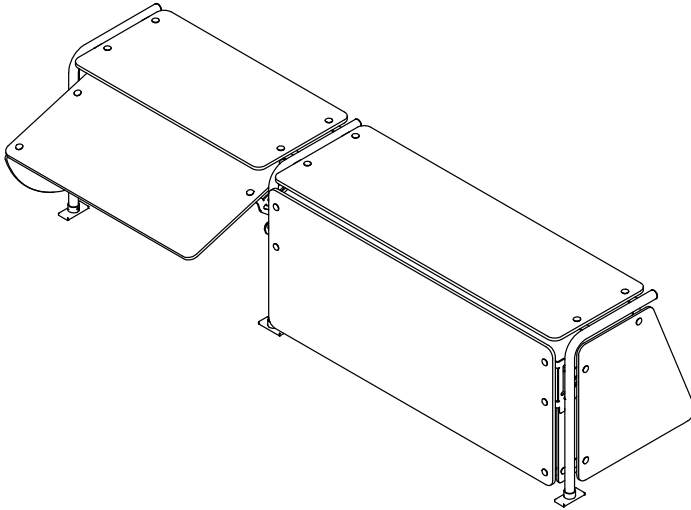

Model: **TS422-74**
Flush Mount

OPTIONS:

- Led lights
- Heater
 - 120 Volt
 - 208 Volt
 - 240 Volt
- Special Height
- Special Length - Max 60" CL/CL per Section

Certifications:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102
 800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com
 SS-1102 TS422 Series Food Guard

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____
 ITEM: _____
 QUANTITY: _____

MODEL:

TS422 Food Guard Series

- TS422-32 2 well - 1 Section
- TS422-46 3 well - 1 Section
- TS422-60 4 well - 1 Section
- TS422-74 5 well - 2 Sections
- TS422-88 6 well - 2 Sections

Frames:

- 1" Dia. Stainless Steel
or
- Powder coated steel - Choice of 12 colors

Mounting Options:

- Flush Mount
- Through Mount

Guards:

- Adjustable from full service to self serve in one easy movement
- 1/4" Tempered Side Glass
- 3/8" Tempered Top and Front Glass
- Clear polished edges on all glass


Specification subject to change



Rev B 01/23/2020

FOOD GUARD TS422 SERIES

A.I.A. File No. 35-C-13

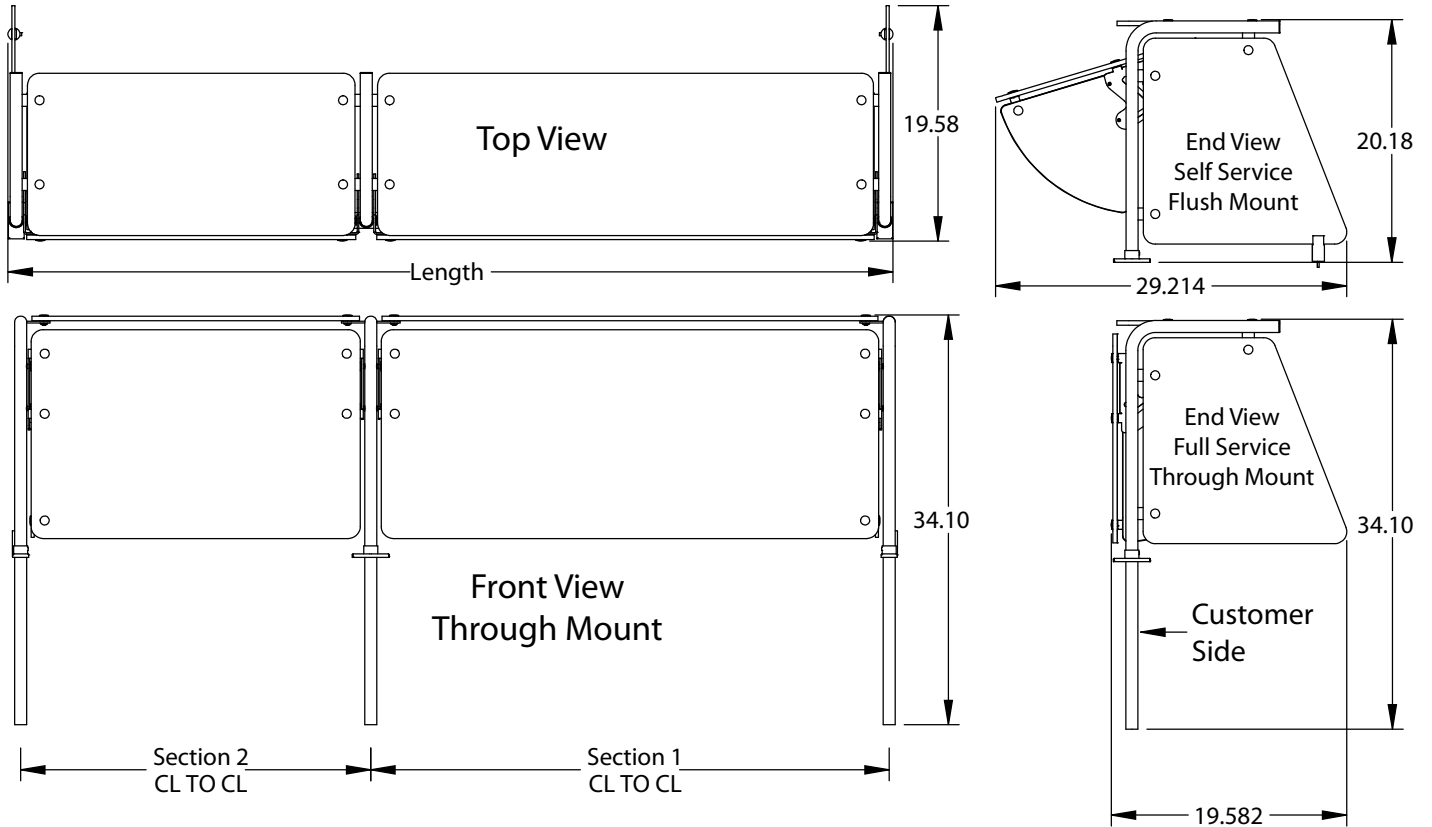

TS422-74 Shown Above

Catalog No. FS CONTEMPORARY

DIMENSIONS:

Freight Class: 100

Model	Overall Height: 20.18 in. / 51.26 cm		Depth Overall: 19.58 in. / 49.73 cm				CL/CL: 15.5 in. / 39.37 cm		Cube ft. crated	Crated Ship Weight	
	Length		Section 1 Length		Section 2 - Length		lbs.	kg			
	Overall	CL/CL	CL/CL	CL/CL	CL/CL	CL/CL					
	in.	cm	in.	cm	in.	cm					
TS422-32	31.50	80.01	30.25	76.84	N/A		18	40	17.2		
TS422-46	45.50	115.57	44.25	112.40	N/A		21	48	20.9		
TS422-60	59.50	151.13	58.25	147.96	N/A		31	68	29.9		
TS422-74	73.50	186.69	43.125	109.54	29.125	73.98	45	98	43.5		
TS422-88	87.50	222.25	43.125	109.54	43.125	109.54	54	118	52.6		

Electrical Specifications:

Model	LED Only 120 Volt NEMA 5-15P		Heater Only 120 Volts		LED and Heater 120 Volts		Heater Only 208 Volts		LED and Heater 120/208 Volts		Heater Only 240 Volts		LED and Heater 120/240 Volts	
	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps
TS422-32	4	.042	250	2.08	254	2.12	250	1.20	254	1.22	250	1.04	254	1.06
TS422-46	8	.067	450	3.75	458	3.82	450	2.16	458	2.20	450	1.88	458	1.91
TS422-60	14	.117	675	5.63	689	5.74	675	3.25	689	3.31	675	2.81	689	2.87
TS422-74	18	.150	1050	8.75	1068	8.9	1050	5.05	1068	5.13	1050	4.38	1068	4.45
TS422-88	23	.192	N/A	N/A	N/A	N/A	1275	6.13	1298	6.24	1275	5.31	1298	5.41

FOOD GUARD TS422 SERIES - TS422



Duke Manufacturing Co.
 2305 N. Broadway
 St. Louis, MO 63102

Phone: 314-231-1130
 Toll Free: 1-800-735-3853
 Fax: 314-231-5074

www.dukemfg.com Printed in U.S.A.
 © 2020, Duke Manufacturing Co.