



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Back Bar Coolers With Glass Doors

Standard Features

- Stainless steel exterior & interior
- Electronic Temperature Controller
- Maintains temperatures between 35°F – 38°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- LED Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

MODELS:

**MBB48GGR / MBB59GGR
MBB69GGR / MBB90GGR**



MBB48GGR



MBB59GGR



MBB90GGR



MBB69GGR

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



**2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY**





"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBB48GGR	2	12.9	4	2	2.3	115/60/1	1/7	R290	48×28 ^{1/10} ×40 ^{1/8}	214	262
MBB59GGR	2	17.3	4	2	2.3	115/60/1	1/7	R290	57 ^{4/5} ×28 ^{1/10} ×40 ^{1/8}	236	284
MBB69GGR	2	21.5	4	2	2.3	115/60/1	1/7	R290	68×28 ^{1/10} ×40 ^{1/8}	260	317
MBB90GGR	3	30.1	6	2	2.8	115/60/1	1/5	R290	89 ^{3/10} ×28 ^{1/10} ×40 ^{1/8}	317	392

PLAN VIEW





MBB48GGR

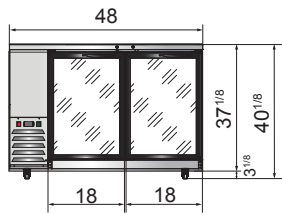




MBB59GGR

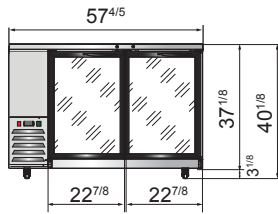

MBB69GGR

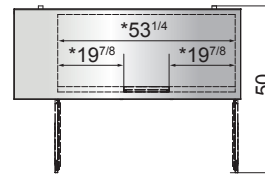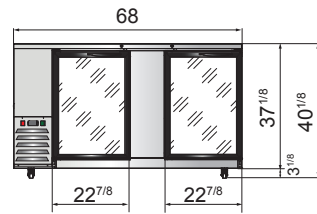


MBB90GGR

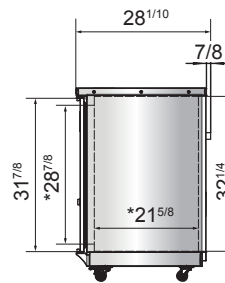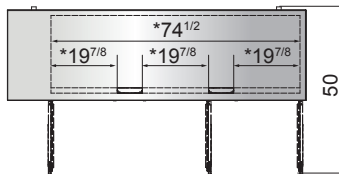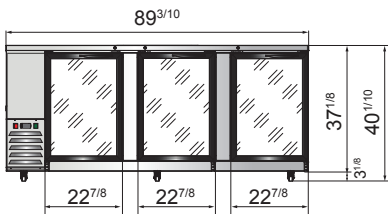

*Interior Dimensions

Epoxy shelves




Door lock



Temperature control



NEMA 5-15P



NEMA 15A/125V