




e ELECTRONIC SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



Powered by
AC or Battery!



Click This Link To
View Assembly Sheet


Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____

FEATURES:

- 3-1/2" swivel gooseneck spout.
- Hot/cold water mixing valve.
- Infrared sensor activated.
- 4 AA Batteries or AC powered.
- 6' cord
- 2.2 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

- Brass chrome plated body & spout.
- Chrome plated handles.



Adjustable Mixing Valve

FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 2.2 GPM/3.8 LPM
THREAD: 55/64 - 27 FEMALE

Replacements Parts

Replacement
Control Module

K-09



Replacement Spout
For K-175 Faucet

K-175SP




Low Flow Aerator

K-08

.5 GPM



DIMENSIONS and SPECIFICATIONS

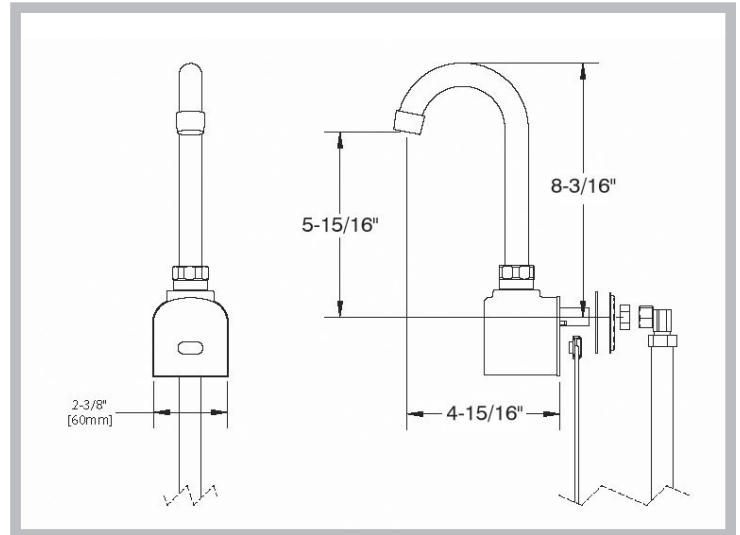

WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You **1-800-645-3166** 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933