

DI-DP12X24

Model Number Key

DI-DP X

Front to back dimension in inches

Left to right dimension in inches



Intertek
4004503

Conforms to NSF/ANSI STD 2

NOTE: Drop-In Drain Pans are made to order and are not returnable.

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Drain Pans

DI-DP	DI-DP12X24, DI-DP12X30, DI-DP12X36, DI-DP12X42, DI-DP12X48, DI-DP18X24, DI-DP18X30, DI-DP18X36, DI-DP18X42, DI-DP18X48
--------------	---

Standard Features

- All stainless steel construction
- 18 gauge stainless steel pan with removable perforated inserts
- Available in standard widths of 12" or 18" and lengths from 24" to 48". Custom sizes also available
- Drain consists of 1/2" tailpiece that exits from the bottom of the unit
- Drain pan flange includes self-rimming edge for tight fit to work surface
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2" stainless steel sheet metal screws, three #10 x 1/2" black sheet metal screws, three cable clamps, two 1/2" x 1/2" plastic elbows

Specifications

Cut-out Dimensions


- Model DI-DP12X24...10-1/4" by 22-1/4"
- Model DI-DP12X30...10-1/4" by 28-1/4"
- Model DI-DP12X36...10-1/4" by 34-1/4"
- Model DI-DP12X42...10-1/4" by 40-1/4"
- Model DI-DP12X48...10-1/4" by 46-1/4"
- Model DI-DP18X24...16-1/4" by 22-1/4"
- Model DI-DP18X30...16-1/4" by 28-1/4"
- Model DI-DP18X36...16-1/4" by 34-1/4"
- Model DI-DP18X42...16-1/4" by 40-1/4"
- Model DI-DP18X48...16-1/4" by 46-1/4"

Installation Instructions

1. Make a cut-out in work surface using cut-out dimensions (located under Specifications) for appropriate model.
2. Place unit into cut-out and plumb drain line.
3. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

Dimensional Information

X = Left to right dimension from 24" to 48", in 6" increments
 Y = Front to back dimension of 12" or 18"

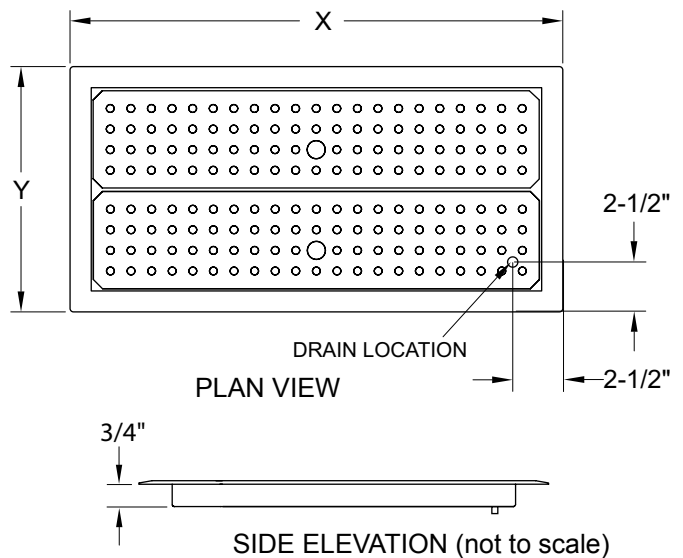

To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	