
W x D x H 27" x 29.63" x 81.63" (including 4" casters) W x D x H 54.38" x 29.63" x 81.63" (including 4" casters)





















Dimensions / Capacity	One Section EF1A-FS	Two Section EF2A-FS
Interior Storage Capacity (CF) (AHAM)	17.74 ft ³	38.54 ft ³
Overall Width x Depth	27" x 29.63"	54.38" x 29.63"
Height (including 4" casters)	81.63"	81.63"
Door Opening (W x H)	22.25" x 52.1"	22.9" x 52.1"
Depth with Door Open at 90°	55.38"	55.38"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs	523 lbs
Crated Length x Depth x Height	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Electrical / Refrigeration	One Section EF1A-FS	Two Section EF2A-FS
Electrical / Refrigeration Voltage		
•	EF1A-FS	EF2A-FS
Voltage	EF1A-FS 115/60/1	EF2A-FS 115/60/1
Voltage HACR Breaker	EF1A-FS 115/60/1 15.0 Amps	EF2A-FS 115/60/1 15.0 Amps
Voltage HACR Breaker Electrical Connection (NEMA)	EF1A-FS 115/60/1 15.0 Amps 5-15P 🙃	EF2A-FS 115/60/1 15.0 Amps 5-15P 🕠
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range	EF1A-FS 115/60/1 15.0 Amps 5-15P (*) 103-127	EF2A-FS 115/60/1 15.0 Amps 5-15P (1) 103-127
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range	EF1A-FS 115/60/1 15.0 Amps 5-15P (*) 103-127 45° to 100°F	EF2A-FS 115/60/1 15.0 Amps 5-15P (1) 103-127 45° to 100°F
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range Control Setpoint Range Amperage Energy Consumption (kWh/day) @ASHRAE	EF1A-FS 115/60/1 15.0 Amps 5-15P (1) 103-127 45° to 100°F -10° to 0°F	EF2A-FS 115/60/1 15.0 Amps 5-15P 1 103-127 45° to 100°F -10° to 0°F
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range Control Setpoint Range Amperage	EF1A-FS 115/60/1 15.0 Amps 5-15P (*) 103-127 45° to 100°F -10° to 0°F 3.2	EF2A-FS 115/60/1 15.0 Amps 5-15P (*) 103-127 45° to 100°F -10° to 0°F 4.7

Options

Additional epoxy shelves

Refrigerant / Charge Amount (oz.)

☐ HS-5511(1 section)☐ HS-5512 (2 section)

Warranty

R290 / (3.5oz)


R290 / (4.2oz)


* 2 Year - Parts and Labor on entire machine. 5 Year - Parts on Compressor Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Features

- · Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Self-closing door(s) is field reversible
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- · Factory-installed casters
- · Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity
- Aluminum shelf supports
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty:

ER1A-FS: 47 ER2A-FS: 28 FRONT VIEW SIDE VIEW

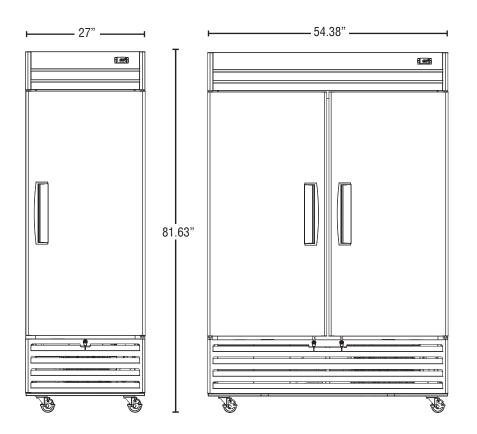

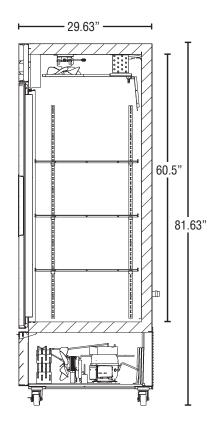

PLAN VIEW

