


SINGLE WELL, HEAVY DUTY, TOP MOUNT, RECTANGULAR DROP-IN FOOD WARMERS

MODELS: HFW-5S, HFW-5DS, HFW-5TS, & HFW-5DTS



One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. E-Z Locks are standard for quick and easy installation. Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery. Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.



OPTIONS

- Adaptor tops for round insets
- Drain valve extension kit
- · Drain screens
- E-Z Lock extension kits for wood counter installation
- Optional 72" wiring

WARRANTY

 1-Year Limited Parts & 1-Year Limited Labor Warranty

CERTIFICATIONS

Certified by the following agencies:





FEATURES AT A GLANCE

- Accommodates five 12"x20" standard inset pans or equivalent fractional pans
- One-piece stainless steel top flange and heavygauge, deep drawn stainless steel warming pans
- Suitable for wet or dry operation (wet recommended for best results)
- Energy-saving fully-insulated construction
- Fully insulated models are perfect for non-metal counters
- Thermostatic or infinite controls
- Separate controls for each individual well
- High limits prevent overheating
- Thermostatic controls are recessed in a one-piece, drawn, front-mounted panel
- E-Z Lock standard for ease of installation
- Powerful tubular heating elements






SINGLE WELL, HEAVY DUTY, TOP MOUNT, RECTANGULAR DROP-IN FOOD WARMERS

MODELS: HFW-5S, HFW-5DS, HFW-5TS, & HFW-5DTS

EQUIPMENT DIMENSIONS

DIMENSIONS:

INCH (MM)

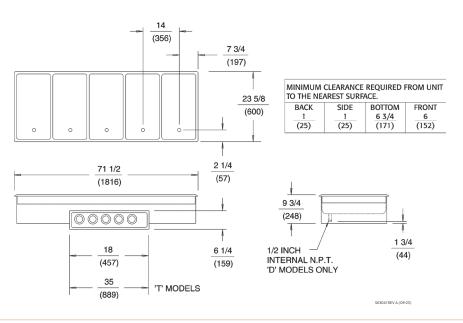

MECHANICAL SPECIFICATIONS

						Control Panel		Crate Size	
					Overal Dimensions	Dimensions		Cubic Feet	
					Width x Height x Depth	Width x Height	Ship Weight	(Cubic	
Model #	Drain	Watts	Voltage	Phase	(inches / mm)	(inches / mm)	(lbs. / Kilos)	Meters)	Approvals
HFW-5S	No	900	208	3	71.5" x 23.63" x 9.75"	18 x 6.25	105 (47.73)	16.57	(NSF) (UL)
		1200	240		(1816 x 600 x 248)	(457 x 159)		(0.469)	(NOT)
HFW-5DS	Yes	900	208	3	71.5" x 23.63" x 9.75"	18 x 6.25	105 (47.73)	16.57	(NSF) (UL)
		1200	240		(1816 x 600 x 248)	(457 x 159)		(0.469)	(HOL) (AL)
HFW-5TS	No	900	208	3	71.5" x 23.63" x 9.75"	35 x 6.25	105 (47.73)	16.57	(NSF) (UL)
		1200	240		(1816 x 600 x 248)	(889 x 159)		(0.469)	(HOE) (GE)
HFW-5DTS	Yes	900	208	3	71.5" x 23.63" x 9.75"	35 x 6.25	105 (47.73)	16.57	(NSF) (UL)
		1200	240		(1816 x 600 x 248)	(889 x 159)		(0.469)	Mar (GL)

^{*}All HFW-5 models ship 3 Phase and are field convertable to single phase.

REQUIRED CLEARANCES

Left 1" (25mm) 1" (25mm) Back Right 1" (25mm) **Bottom** 6 3/4" (171mm)

4 1/8" (105mm) Front

Freight Class: 100 FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

