iMIX®-5S+ Top Hinge

Height: 32.8" Width: 19.3" Depth: 24.0" (83.3cm) (49.0cm) (61.0cm)



• 7gal (26.5L) hot water tank to meet peak serving times

- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information
- Can be set as push and hold or single size portion control
- Capacity: Five 8lb (3.6kg) hoppers
- Cup clearance at 7.25" (18.4cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6cm)]
- Easily removable side panels for complete access to service components
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service set up and calibration
- · High speed heavy-duty whipper for complete product mixing
- High efficiency LED lighted front graphics for merchandising
- Spring-loaded, all metal auger drive system for easy hopper installation
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second)

Agency:





Additional Features

Specifications

Product #: 38100.0050 Finish: Black Hoppers: Five Door: Lit Door: Top Hinge Dispense: Portion Control Dispense: Push Button Water Access: Plumbed

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	15	1800	Yes	NEMA 5-15P	72	60°F (15.5°C)	1	2	50/60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	0		0			
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-100	138-689	1/4" Male Flare Fitting	-	•	•	•
^						


MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 04/26/2024

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

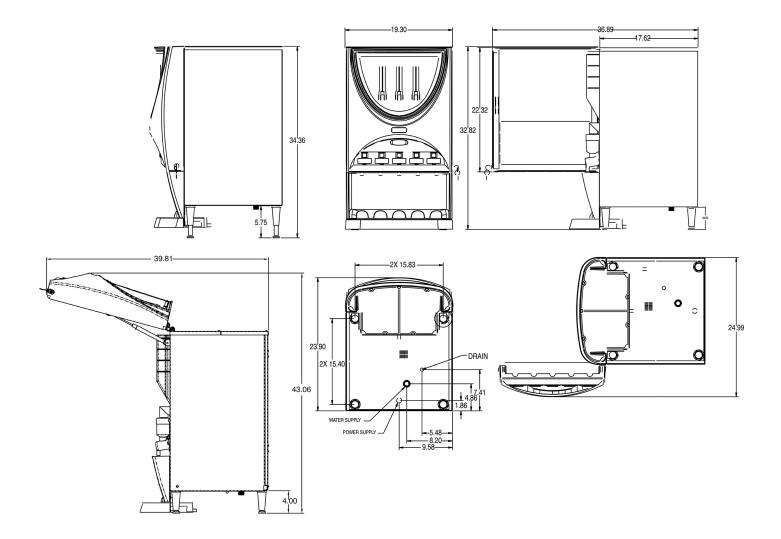

	Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume		
English	32.8 in.	19.3 in.	24.0 in.	40.4 in.	23.2 in.	28.9 in.	136.000 lbs	15.676 ft ³		
Metric	83.3 cm	49.0 cm	61.0 cm	102.6 cm	58.9 cm	73.4 cm	61.690 kgs	0.444 m³		




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 04/26/2024

 For most current specifications and other info visit bunn.com.
 04/26/2024

Related Products & Accessories: iMIX®-5S+ Top Hinge(38100.0050)

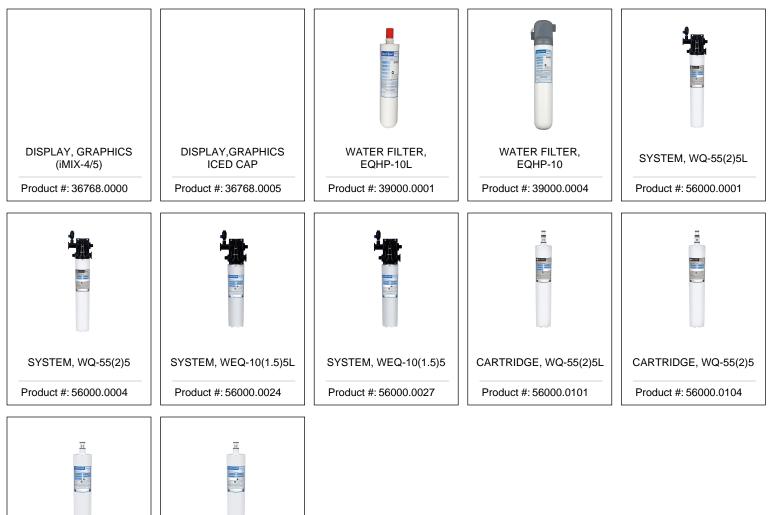

CARTRIDGE, WEQ-10 (1.5)5L Product #: 56000.0121





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last Updated: the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 04/26/2024 For most current specifications and other info visit bunn.com.