



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Panco® Roll-In Refrigerator Rack, aluminum model _____ . Frame, corner uprights, top and bottom constructed of 1" square aluminum tubing. 1 1/8" x 1 1/8" extruded aluminum tray slides with raised beads to minimize friction. Slide spacing to be 2 1/4", 3", or 5" to accommodate (24, 18, 11, or 36) trays. Furnished with 5"-diameter casters. Shipped assembled. Note: Model #UARR-64-A comes with 12 universal angle slides, accommodating a variety of pan/rack sizes.



roll-in refrigerator rack

Options / Accessories

- Casters with locking brakes
- Pan stops
- Vertical corner bumpers

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglegrp.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.:	_____
Project No.:	_____
S.I.S. No.:	_____

Panco® Roll-In Refrigerator Racks—Aluminum Models

MODELS:

- OURR-1824-2-A OURR-1811-5-A UARR-64-A
- OURR-1818-3-A OURR-2036-3-A

Features on all models

- Features include dolly frame with recessed plate casters.
- Units fit specifications of most refrigerator manufacturers, including Hobart, Traulson, Victory, True and Continental.
- Shipped assembled.

Features on "OURR" models

- Frame and top support: 1" (25mm) square aluminum tubing with 0.063" (2mm) wall.
- Tray slides: Extruded aluminum angle 1 1/8" high x 1 1/8" lip (37 x 48mm) with raised beads to prevent friction. Slides are riveted to frame.
- Corner uprights: 1" (25mm) square aluminum tubing with 0.063" (2mm) wall.
- Top and bottom: Top is 1" (25mm) square aluminum tubing with 0.063" (2mm) wall. Bottom is die-formed 0.1" (3mm) aluminum.
- Casters (installed): 5" (127mm)-diameter NSF-approved, non-marking rubber tired wheels on swivel plate casters.

Features on #UARR-64-A

- Frame and top support: 1 1/4" x 1 1/2" (32 x 38mm) aluminum, with 0.07" (2mm)-thick wall.
- Tray slides: 6 1/4" (159mm) wide, 0.1" (3mm)-thick. Aluminum universal "stepped angle" slides adjustable on 1 1/2" (38mm) centers. Bottom slides are welded in place.
- Top and bottom: 1 1/4" x 1 1/2" (32 x 38mm) extruded aluminum. 0.07" (2mm)-thick all-welded aluminum.
- Casters (installed): 5" (127mm)-diameter poly tread wheels on swivel plate casters.

Certifications / Approvals



AutoQuotes




EG60.13A Rev. 08/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites



Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Panco® Roll-In Refrigerator Racks—Aluminum Models

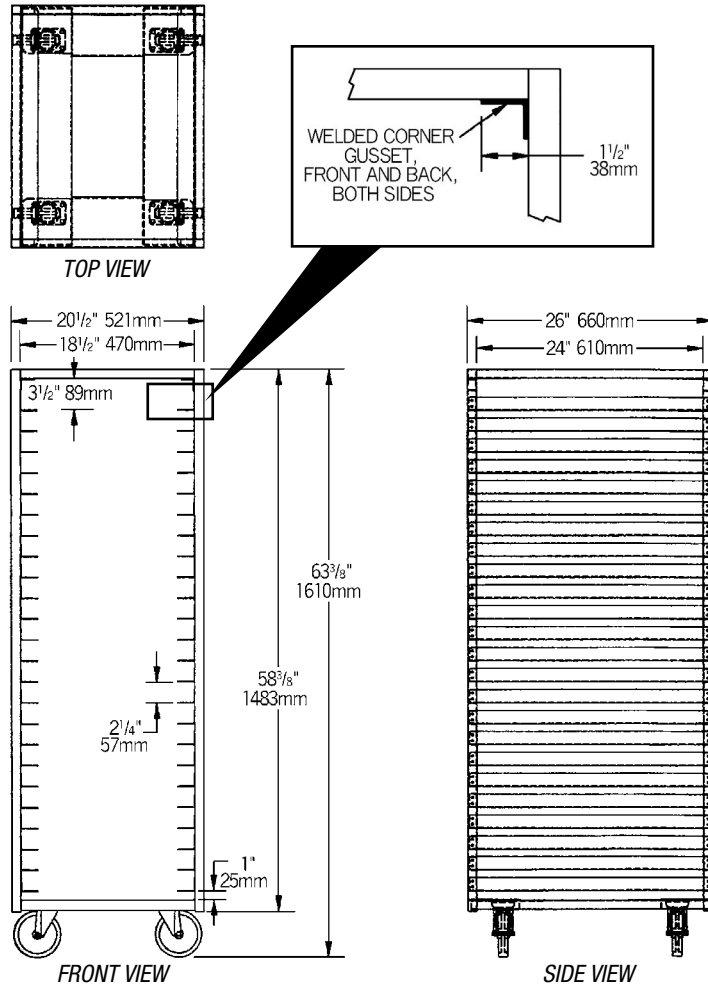

(model# OURR-1824-2-A shown)

model #	overall dimensions				weight		sliding space		tray size	tray capacity		
	width in.	width mm	depth in.	depth mm	height in.	height mm	in.	mm				
OURR-1824-2-A	20 1/2"	521	26"	660	64"	1626	62	28.1	2 1/4"	57	18" x 26"	24
OURR-1818-3-A	20 1/2"	521	26"	660	64"	1626	52	23.6	3"	76	18" x 26"	18
OURR-1811-5-A	20 1/2"	521	26"	660	64"	1626	42	19.1	5"	127	18" x 26"	11
OURR-2036-3-A	23"	584	26"	660	64"	1626	62	28.1	3"	76	12" x 20" *	36 *
UARR-64-A	24 1/2"	622	26"	660	64"	1626	86	40.4	1 1/2"	38	UAS**	

* Two 12" x 20" (305 x 508mm) trays per set of tray slides.

** Model #UARR-64-A comes with 12 Universal Angle Slides. Each set holds two 12" x 20" (305 x 508mm) pans, one 18" x 26" (457 x 660mm) tray, plus one 15" x 20" (381 x 508mm) tray or one 20" x 20" (305 x 305mm) rack.

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065
 www.eaglegrp.com • www.eaglegrpnews.com • www.eaglehmc.com

Printed in U.S.A.
 ©2023 by Eagle Group

Rev. 08/23

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.