PRO-LINE[™] 95" - 5 KEG



- Designed by beer-industry experts for performance and value.
- Front breathing for cooling and exhaust.











Adjustable Digital Thermostat! Easy to read exterior mounted





Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ 95" - 5 KEG



Part No.	Door Type		Door Type	Finish	Doors	Shipping Weight
☐ MBB94-E	Solid	☐ MBB94G-E	Glass	Black	3	184 kg
						406 lbs
☐ MBB94S-E	Solid	☐ MBB94GS-E	Glass	Stainless Steel	3	184 kg
						406 lbs


Operating Performance

Keg Capacity of 1/2 Kegs	5
Cubic Feet (liters)	39.2 (1112)
Shelves, Flat - Included	2
Shelves, Dividers - Included	4
Cans 12 oz (355ml)	1092
Approval	ETL Listed
Compressor HP	1/3

Running Amps	3.0
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	4.9
Working High/Low Pressure	300 psig / 150 psig

Exterior	All Models: 18 gauge 201 grade stainless steel (s/s) top, 22 gauge solid doors, 24 gauge steel front, sides and back Black Models: Front, sides, back and doors black vinyl over steel. S/S Models: Front, sides, back and doors are s/s.	
Interior	20 gauge stainless steel floor and walls, rugged false floor, reinforced frame	
Ventilation	Front breathing for cooling and exhaust	
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing	
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor	
Accessories	Casters or 6" fixed legs (order separately)	

Dimensions

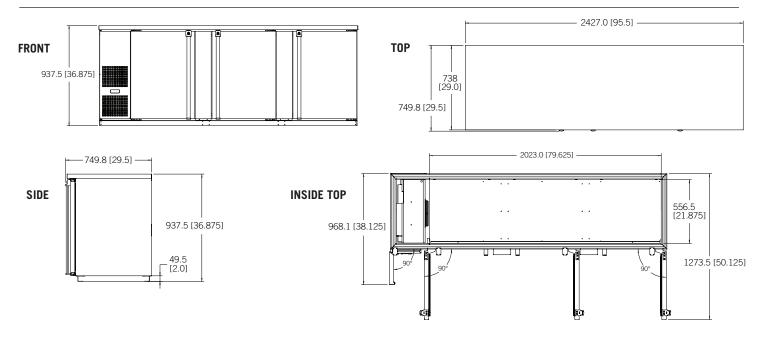



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466