

#### COMMERCIAL

### Refrigeration Equipment Bottle Cooler with Slide Top, 10 cu.ft, 25" (R600a)



738294 (HC-B36A)

1-door bottle cooler with slide top, 25", R600a refrigerant gas, +33/+41°C, black

# **Short Form Specification**

#### Item No.

Bottle cooler with slide top. Exterior back and side panels in painted steel, exterior bottom panel in galvanized steel, top panel in 304 stainless steel; interior back and side panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and electronic temperature control.

Vinyl-coated steel adjustable dividers and locking lids.

R600a gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

	X
TEM #	Ž
	3
MODEL #	
NAME #	8
	Ä
SIS #	
NIA #	

#### **Main Features**

- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Vinyl-Coated Steel adjustable dividers to customize bottle storage effortlessly.
- Locking doors.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmetal impact.
- Locking lids.

### Construction

- CFC and HCFC free (ecological refrigerant type: R600a).
- Pre-wired heavy duty power cord.
- Electronic control to select temperatures.




1"-283mm

3¥5 5¥5

Ð

Intertek

# Refrigeration Equipment Bottle Cooler with Slide Top, 10 cu.ft, 25" (R600a)

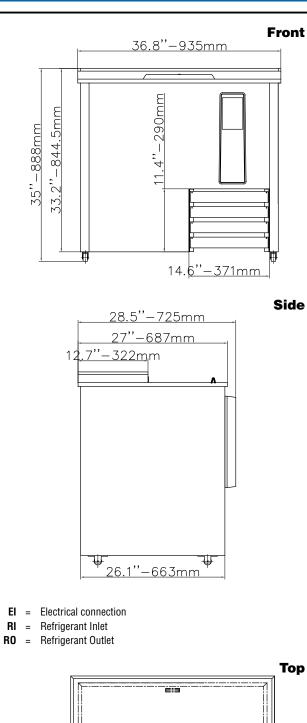

:<u>, ..., ..., .</u>.

<u>34.1''–866mm</u>

Intertek

15A 125V NEMA 5-15P

## Electric

Operating temperature max.:

Condenser type:

Supply voltage: 738294 (HC-B36A) Electrical power, max: Current consumption: Plug type:	115 V/1 ph/60 Hz 0.2 kW 1.5 Amps USA NEMA 5-15P
Capacity:	
Gross capacity:	10 cu.feet
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty:	36 13/16" (935 mm) 27 1/64" (725 mm) 35 " (888 mm) 26 1/16" 22 15/16" 60 3/8" 39 3/4" (1010 mm) 212 lbs (96 kg) 25.25 ft <sup>3</sup> (0.72 m <sup>3</sup> ) Black Prepainted Steel Stainless Steel 3 / 5 years
<b>Refrigeration Data</b>	
Compressor Horsepower: Refrigerant type: Refrigerant weight: Dperating temperature min.:	1/6 R600a 100 g 32 °F

41 °F

Fin & tube

Refrigeration Equipment Bottle Cooler with Slide Top, 10 cu.ft, 25" (R600a)