

COMMERCIAL

# Refrigeration Equipment 16-Crate Milk Cooler 59" Long

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



School milk cooler with exterior back panel in white-painted steel, bottom panel in galvanized steel, exterior side panels in white-painted steel and top in 430 stainless steel; interior back and side panels in 430 stainless steel, interior bottom in 304 stainless steel. Interior drain and electronic temperature control.

Heavy duty locking casters, removable door gasket, lid and key to protect the unit.

R290 gas in the refrigeration circuit.ETL Safety and Sanitation certified.3/5 Years warranty.

# **Main Features**

- External temperature display.
- Removable gasket for easy cleaning operations.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

## Construction

- Heavy-duty, locking casters keeps the unit in place but allow position adjusting.
- Locking lid to protect contents of the unit.
- Internal drain for easy clean out.
- Pre-wired heavy duty power cord.
- Cold Wall evaporator.

#### **Sustainability**

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) CFC and HCFC free.

APPROVAL:

Part of


Kelvinator Commercial www.kelvinatorcommercial.com



# Refrigeration Equipment 16-Crate Milk Cooler 59" Long



ront	Electric	
	Supply voltage: 738277 (KCHMC58) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.21 kW USA NEMA 5-15P
Ē	Capacity:	
35.7''–906,5mm 42''–1067mm	Gross capacity:	21.6 cu.feet
5.7''–906,5í 42''–1067mm	<b>Key Information:</b>	
de	External dimensions, Width: External dimensions, Depth: External dimensions, Height: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Type of external material: Type of internal material: Warranty: Approvals	58 1/16" (1475 mm) 30 9/16" (777 mm) 42 1/64" (1067 mm) 26 1/2" / (673.1 mm) 25 1/2" / (647.7 mm) 54 7/8" / (1394.46 mm) 48 5/8" (1235 mm) 315 lbs (143 kg) 54.35 ft <sup>3</sup> (1.54 m <sup>3</sup> ) Prepainted white Stainless Steel 3 / 5 years ETL C&USETL SANITATION
	<b>Refrigeration Data</b>	
	Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type:	1/3 hp 35.6 °F 37.4 °F Fin & tube Auto Defrost
	Sustainability	
qq	Current consumption: Refrigerant type: GWP Index: Refrigerant weight:	3 Amps R290 3 90 g
-802mm		

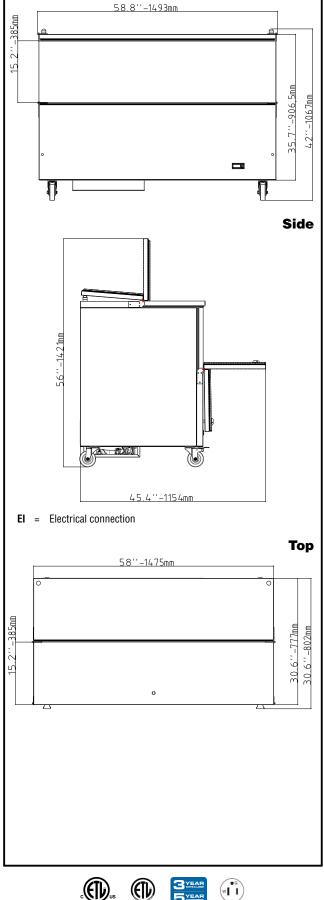

Intertek

Intertek

15A 125V NEMA 5-15P

Refrigeration Equipment 16-Crate Milk Cooler 59" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.