

CORRECTIONAL UNIVERSAL ANGLE ROLL-IN REFRIGERATOR RACK MODEL 207-UA-12-Z

FEATURES AND BENEFITS:

- Durable heavy duty rack specifically designed for the Correctional Market. Fits roll-in or pass through refrigerators, freezers, and warming cabinets; eliminates unnecessary product handling. Holds a variety of pan sizes.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Twelve sets of non-removable extruded universal angles are welded and riveted to posts on 4-1/2" centers.
- Inboard heavy duty 5" swivel casters, two with brakes. Wheel placement permits easy "in-and-out" of roll-ins.
- Other heavy duty roll-in rack models available.




207-UA-12-Z





ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumpers
- Various Caster Options

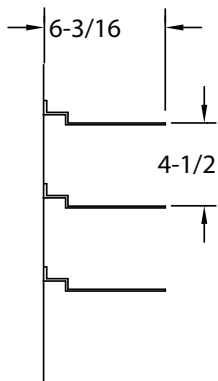

DETAIL OF PAN SLIDES

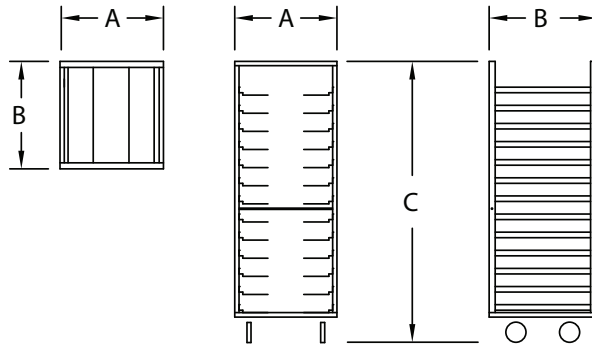

INBOARD CASTER PLACEMENT

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-UA-12-Z	12 SETS	SEE NOTE BELOW	IN	24-1/2	24-15/16	64-1/2	21-3/4	24-3/8	55-15/16	LBS	100
			MM	625	635	1640	555	620	1425	KG	45

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans.
 2. When ordering bumpers, add 2" to overall dimensions.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded aluminum channels, 1-1/16 x 2 x .125.
- Top bars: Extruded channels 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie bars: (2): Extruded channels, 1/2 x 1-1/2 x .125; welded to posts.

BASE:

- One piece construction, .190 aluminum; welded to posts.
- Casters: 5" dia. swivel, modulus tires, 1-1/4" wide, load cap. 250 lbs. each, temp. range -45/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded angles, 2 x 6-3/16 x .100, riveted and welded on 4-1/2" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Correctional Roll-In Refrigerator Rack Model 207-UA-12-Z. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. Twelve (12) sets non-removable extruded universal angles for multiple pan sizes, spacing every 4-1/2". Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2 year parts warranty. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2014 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.