

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

| Project: | | |
|-------------------|--------|------|
| Model #: | | |
| Item #: | | |
| Available W/H: | | Qty: |
| Approval: | | |
| AIA#: | SIS #: | |
| CSI Section 11400 | | |

Pass Thru Glass Door Heated Cabinet

Pass-Thru PRO Series

Model: PRO-77H-G-PT

___ FEATURES & BENEFITS =__

■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- · Alarm beeps when doors are not sealed
- Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- Sensitive touch display

■ Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length glass doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles











| Model | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D*x H † (inches) |
|--------------|---------------|---------|----------------|-------------|------|-------------------------|----------------------|
| PRO-77H-G-PT | 6 | 78.1 | 9 | 3000 | 15 | 924 | 773/4 x 361/4 x 78 |

(unit: inch)

Pass Thru Glass Door Heated Cabinet

Model: PRO-77H-G-PT

| ELECTRICAL DATA | | | | |
|----------------------------|----------------------------|--|--|--|
| Voltage | 208~230V/115V/60Hz/1Ph | | | |
| Plug Type | NEMA L14-20P | | | |
| Full Load Amperes | 15 | | | |
| Wattage(W) | 3000 | | | |
| Cord Length (ft.) | 8 | | | |
| DIMENSIONAL DATA | | | | |
| # of Doors | 6 | | | |
| # of Racks Accepted | 3 | | | |
| Net Capacity (cu. ft.) | 78.1 | | | |
| Ext. Length Overall (in.) | 773/4 (1976mm) | | | |
| Ext. Depth Overall (in.)* | 361/4 (920mm) | | | |
| Ext. Height Overall (in.)† | 78 (1982mm) | | | |
| Int. Length Overall (in.) | 681/4 (1735mm) | | | |
| Int. Depth Overall (in.) | 275/8 (702mm) | | | |
| Int. Height Overall (in.) | 58 _{3/4} (1493mm) | | | |
| # of Shelves | 9 | | | |
| Chalf Cina (L., D) (in) | 223/4 x 263/8 (Left/Right) | | | |
| Shelf Size (L x D) (in.) | 25 x 263/8 (Middle) | | | |
| Net Weight (lbs.) | 856 | | | |
| Gross Weight (lbs.) | 924 | | | |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

■ WARRANTY: 3 Year Parts and Labor Warranty


STANDARD FEATURES


- Door locks
- · 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design

OPTIONAL ACCESSORIES

- 5" caster. 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
 Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4), TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF, TS3-N1C(#1), TS3-N1C HALF, TS3-N4C(#4), TS3-N4C HALF, TS3-N4C(#4), T TS3-UNC-H(Universal), TS3-UNC-H HALF

PLAN VIEW

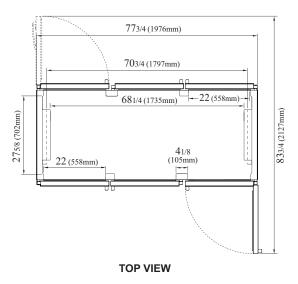

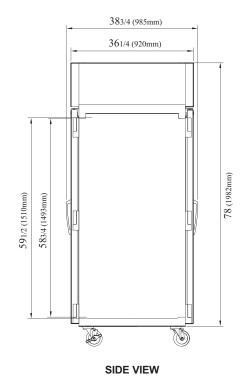

Ver 20230608







Turbo air







■ Warranty: 800-381-7770

■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ **AC**: 888-900-1002

^{*} Depth does not include 2-1/2" for door handles.

[†] Height does not include 5" for caster height.