

I-PRO 2 FROZEN GRANITA DISPENSERS

Project

Date

Models

- I-PRO 2M UV
- I-PRO 2M UV light panel
- I-PRO 2E UV
- I-PRO 2E UV light panel

Item #

Quantity



**Model I-PRO 2M UV
with light panel**




Model I-PRO 2E UV

Features

- Most advanced professional slush, sorbet, and granita machine in the world. High performance, ultramodern design, and user-friendly.
- (2) 2.9 gallon (11 L) insulated bowls with either mechanical or electronic control board and timer, and light panel.
- Insulating technology increases cooling power, saves energy and money, and reduces external condensation.
- Transparent bowl encourages impulse purchasing.
- Manual defrost mode.
- Efficient safety mechanism is activated when cover is lifted. All moving parts automatically and immediately stop.
- Lockable lid.
- Adjustable product consistency.
- Exclusive nUV LED system for bowl sanitation.
- Perfect solution for restaurants, coffee shops, bars, amusement parks, convenience stores, kiosks, and much more.
- All models are certified NSF-6 safe for milk.

I-PRO 2 FROZEN GRANITA DISPENSERS

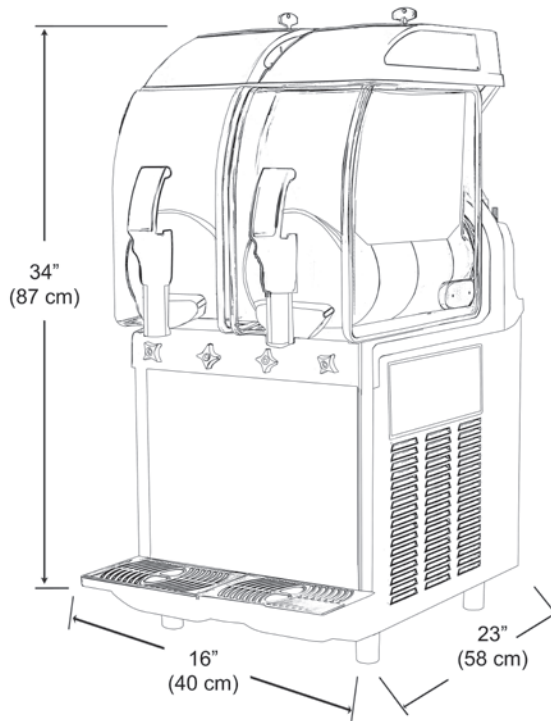

NSF-6



Intertek



Intertek

Model I-PRO 2E UV

MODEL	DESCRIPTION	ELECTRICAL	PRODUCT DIMENSIONS (H X W X D)	SHIPPING DIMENSIONS (H X W X D)	PRODUCT WEIGHT	SHIP WEIGHT
I-PRO 2M UV* (1206-026)	(2) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, black finish	115V / 60 Hz 0.975 kW / 10A / 1 Ph	34" x 16" x 23" (87 cm x 40 cm x 58 cm)	36" x 17" x 23" (92 cm x 44 cm x 58 cm)	132 lbs. (60 kg)	141 lbs. (64 kg)
I-PRO 2M UV* light panel (1206-027)	(2) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, lighted panel, black finish	115V / 60 Hz 0.975 kW / 10A / 1 Ph	34" x 16" x 23" (87 cm x 40 cm x 58 cm)	36" x 17" x 23" (92 cm x 44 cm x 58 cm)	132 lbs. (60 kg)	141 lbs. (64 kg)
I-PRO 2E UV* (1206-028)	(2) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, black finish	115V / 60 Hz 0.93 kW / 9.4 A / 1 Ph	34" x 16" x 23" (87 cm x 40 cm x 58 cm)	36" x 17" x 23" (92 cm x 44 cm x 58 cm)	132 lbs. (60 kg)	141 lbs. (64 kg)
I-PRO 2E UV* light panel (1206-029)	(2) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, lighted panel, black finish	115V / 60 Hz 0.93 kW / 9.4 A / 1 Ph	34" x 16" x 23" (87 cm x 40 cm x 58 cm)	36" x 17" x 23" (92 cm x 44 cm x 58 cm)	132 lbs. (60 kg)	141 lbs. (64 kg)

Refrigeration: R449A

Note: Operate at room temperature between 75 - 90° F (24 and 32° C).

Note: Clearance of 8" (20 cm) required on all sides.

Note: Mixture must maintain a sugar content near 14%.

A lower concentration could seriously damage the mixing parts and gear motors.

***Electrical:** NEMA 5-15P line cord included.

Grindmaster™ 4003 Collins Lane, Louisville, KY 40245 USA

Tel: +1.502.425.4776 / 800.695.4500 (USA & Canada only) • Fax: +1.502.425.4664 • www.grindmaster.com

© 2021 Grindmaster™ PRINTED IN USA | 0921 Form # CC-102-02