BACK BAR EQUIPMENT

Model: KC59NSS

Natural Refrigerant R-290 Model

59" Keg Cooler

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



Options and Accessories

(upcharge and lead times may apply)	
Epoxy coated or stainless steel shelves	Faucet lock
Hinged glass doors (consult factory)	Riser base* (field installed)
Food storage rated stainless steel interior (NSF-7)	Condensing unit on right
Single, dual or triple faucets	Wine rack
Tower placement (consult factory)	Casters or legs
Shallow depth	

Consult factory for other model configurations, options and accessories.

* Adding a Riser Base increases overall height 2"

Project Name: Model Specified: Location: Item No: Quantity: AIA #: SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹ Automatic, hot gas condensate evaporator Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Front, rear and side venting louvered grills Magnetic snap in Santoprene™ door gaskets Cylinder-keyed security lock in each door Stainless steel reinforced threshold

MODEL FEATURES

Low profile cabinet design

Electronic controller with digital display & hi-low alarm

LED interior lighting

Continuously cooled, 3" diameter beer column with lever faucet, CO_2 pressure relief distributor and CO_2 tubing with clamps

Easily removable stainless steel drip grate with convenient front mounted cleanout drainage hose (pan not removable)

Off-cycle defrost

Easily accessible and serviceable condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

Model Plan Views



	00 (000 I)
Net Capacity (cubic feet)	22 (623 cu l)
Width, Overall (inches)	59 (1499 mm)
Depth, Overall (inches) (including handles & bumpers)	29 ¾16 (741 mm)
Depth, Body Only (inches) (less doors)	25 (635 mm)
Height, Overall (inches) (not including columns)	34 ¾ (883 mm)
Capacity: # Barrel Kegs	2
Capacity: # Straight Wall Kegs	3
Capacity : # 1/6 Size Kegs	9
Number of Doors	2
Number of Beer Columns (with single faucets)	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	2025

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	3.7 (3.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	405 (184 kg)
Height - Crated (inches)	46 (1168 mm)
Width - Crated (inches)	65 (1651 mm)
Depth - Crated (inches)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

udly Designed and

Fax: 215-244-9579







Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

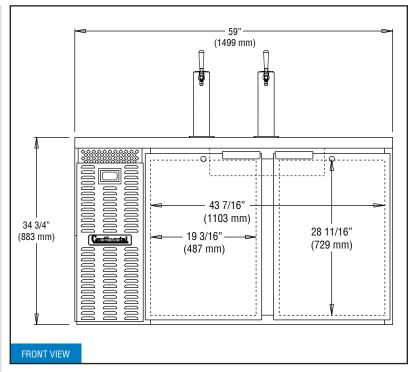

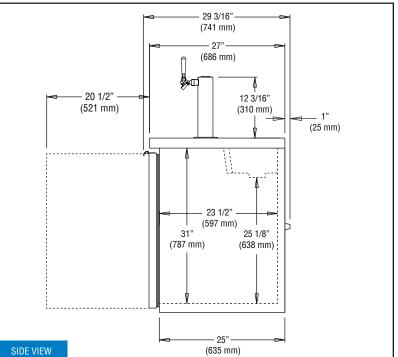

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet <u>must</u> not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.