

36" Genesis Series Range, Manual Griddle with Oven

▪ G36ST – 24B 12G

36" Genesis Series Range, Manual Griddle with Oven



Model G36ST – 24B 12G



100% manufactured from raw materials providing the highest quality and durability

STANDARD FEATURES

- 3-year parts and labor warranty
- 14 gauge fully welded interlocking frame
- 7 " stainless steel belly rail
- Metal chrome insulated Knobs
- Adjustable 6 " chrome-plated steel legs

RANGE

- KI Award Winning High High-Efficiency Burners (VT Burner Technology)
- Standing pilot for open top burners
- Heavy duty 12" x 12" removable cast iron grates
- Stainless steel front and sides
- Front main manual gas shut-off valve

GRIDDLE

- Stainless steel front, sides and splash guards
- Fully welded griddle plate
- Control of the burner allowing the best heat distribution in the industry
- Stainless steel drip tray
- No cold zone or hot spot

- Heavy, highly polished ¾ " griddle plate
- Easy access to burner box
- Burner, designed to achieve the best performance with 25,000 BTU/h

OVEN

- 35,000 BTU/h oven with snap action thermostat adjustable for 175 °F to 550 °F (79.4 °C to 287.7 °C)
- Stainless-steel oven cavity (top, bottom and side)
- Fully welded stainless steel seamless oven door
- Heavy duty oven wired rack – 3/16 " diameter
- 26 ½ " Standard bakery depth on ovens
- Spark ignition for oven bases
- 5 shelf positions and 4 racks standard

OPTIONS & ACCESSORIES

- Modular belly rail accessory for 1/6 pans
- Cutting Board
- (2)6" swivel casters with front locking brakes
- Oven Rack
- Quick disconnect (3/4 Flex hose quick disconnect 4' long)
- Stub Back Flue Riser

SPECIFICATIONS

- Manifold pressure is 4 " W.C. (Natural Gas) or 10 "W.C. (Propane Gas)
- Adjustable 6 " chrome-plated steel legs.
- ¾ " NPT rear gas connect and pressure regulator for both natural gas and propane

RANGE

- Removable 22,000 BTU/h VT Burners providing maximum control , best heat distribution and efficiency in the industry
- Each burner is controlled by a gas valve for independent control of flame. One standing pilot services each burner

GRIDDLE


- 25,000 BTU/h burner , providing best performance
- One standing pilot services the burner
- Heavy, highly polished ¾ " griddle plate
- Control of the burner by a gas valve for independent control of flame allowing the best heat distribution in the industry
- Stainless steel grease trough

OVEN

- 35,000 BTU/h burner
- One standing pilot services the burner



▪ G36ST – 24B 12G

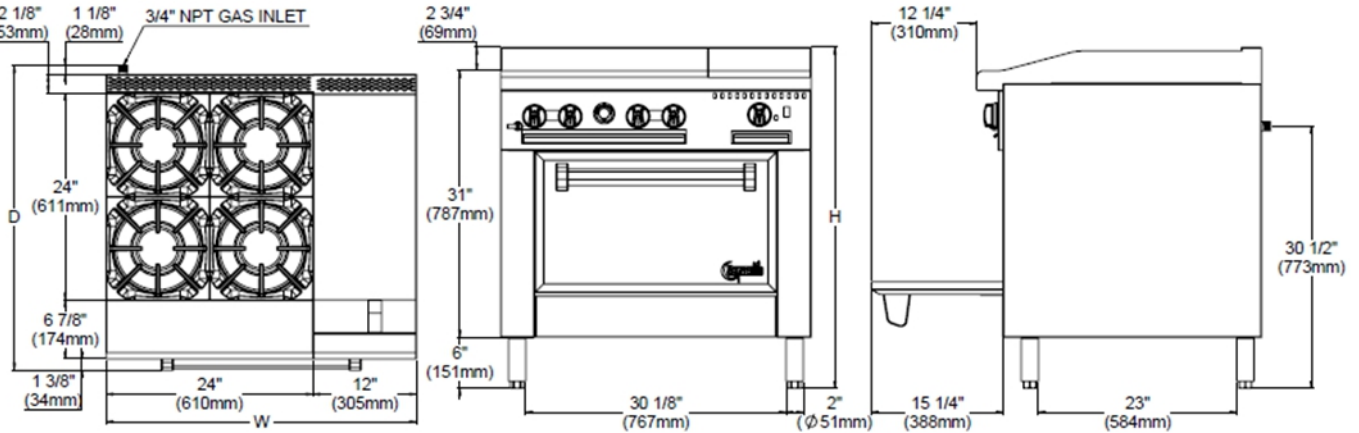

Model	Exterior Product Dimensions & Weight				Shipping Crate Dimensions & Weight			
	Width	Depth	Height	Weight	Width	Depth	Height	Weight
G36ST – 24B 12G	36 " (915 mm)	35 3/16 " (894 mm)	39 5/8 " (1,006 mm)	573 lb (260 kg)	40 1/32 " (1,017 mm)	38 3/8 " (975 mm)	44 3/32 " (1,120 mm)	697 lb (316 kg)

Model	Oven Interior		
	Width	Depth	Height
Standard	26 1/2 " (673.1mm)	26 1/2 " (673.1mm)	14 " (355.6mm)

UTILITY INFORMATION

GAS SUPPLY

Model	Burners (Range)	Gas (BTU/h)		Burners (Griddle)	Gas (BTU/h)		Burners (Oven)	Gas (BTU/h)		Manifold Pressure	
		Natural	Propane		Natural	Propane		Natural	Propane	Natural Gas	Propane gas
G36ST – 24B 12G	4	88,000	88,000	1	25,000	25,000	1	35,000	33,000	4 " W.C.	10 " W.C.

- 3/4" NPT rear Gas inlet.
- Specify elevation, If over 2000 ft
- LP conversion kit included

CLEARANCES REQUIREMENTS

Provide side and rear clearance is 0 "(0 mm) from non-combustible surfaces. 8 " (203.2 mm) – rear, 6 " (152.4 mm) – sides clearance from combustible surfaces

MISCELLANEOUS

- Install under vented hood.
- Check local codes for fire, installation and sanitary regulations
- Intended for commercial use only. Not for household use

