




BARRIERMASTER FLAVOURLOCK TRUNKLINE

2 PRODUCT - 5/16" I.D.

- Barriermaster Flavourlock tubing prevents gas permeation ensuring beverage quality.
- Dependable delivery of virtually all beverages from walk-in to tower.
- Black Diamond® jacket is 15% more thermally efficient than traditional tape jacket.
- Color coded lines for easy identification.

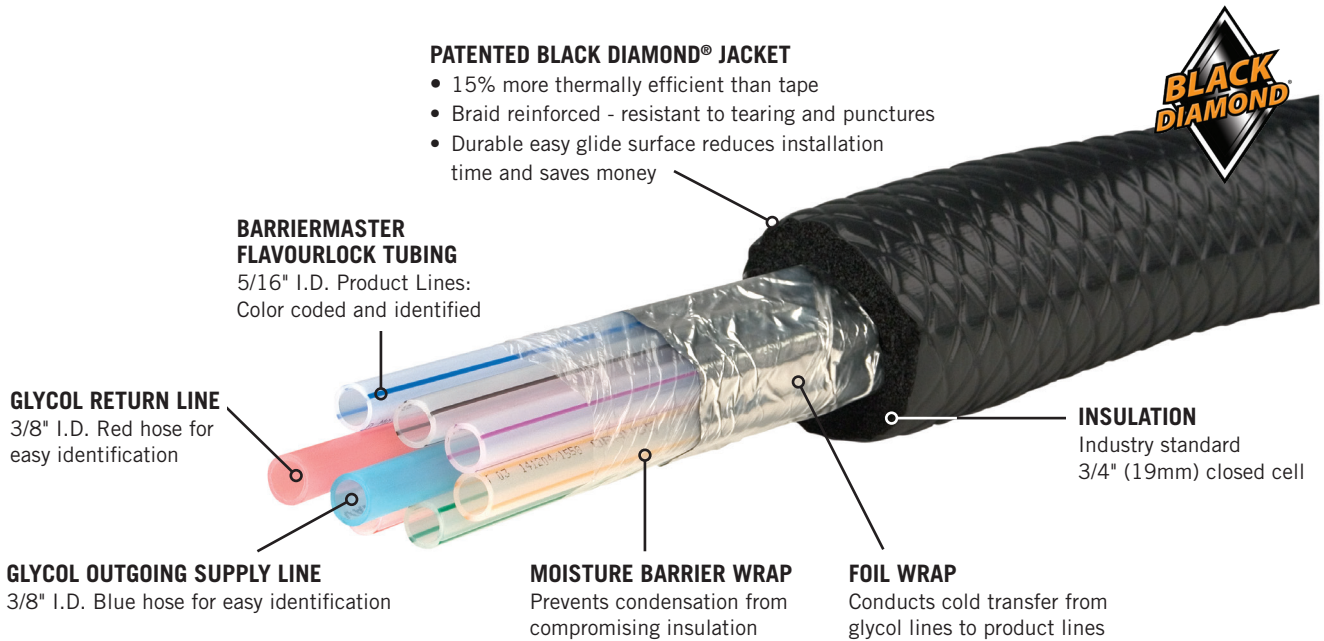

CDI252-BF


NSF Standard 51 Listed
Food Equipment Materials

Part No.	Description	Shipping Weight
<input type="checkbox"/> CDI252-BF	2 Product Lines / 2 Glycol Lines	.27 kg (per 305mm) .60 lbs (per foot)

Performance

Product Lines	8mm I.D. (5/16" I.D.) Barriermaster Flavourlock tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) polyethylene tubing Outgoing: Blue color coded Return: Red color coded
Moisture Barrier Wrap	Food quality barrier film
Cold Transfer Wrap	Aluminum foil
Insulation	19mm (3/4") closed cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braid reinforced, resistant to tearing.
Exterior Marks	Sequential foot marking, every 610mm (2 ft.)
Fire Rating	Class 1 - Self-extinguishing to BS3924, Class 1 when applied to insulation.
Certification	NSF/ANSI Standard 51 Food Equipment Materials.

Dimensions

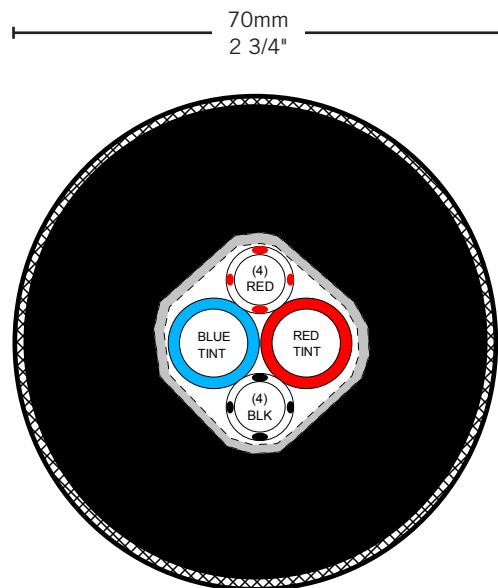

 **MICRO MATIC**
Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast
15111 Dispense Ln.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466