## TES

Drawn:

GEF

Checked:

JRM

Approved:

JHB

Date:

## T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3102-VF12

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

2 1/4" [57mm]	<b>L</b>	·	e for Architect/Engin	
[3/11111]	ADA Compliant			Quantity
111	or suppressed to the resident Version value	-		
	ChekPoint <sup>™</sup>			
	O CHERPOIN		eer	
		Architect/Lingin	GGI	
Solid Cast Brass Spout w/ Polish Chrome Plated Finish & B-0199-08-F12 VR 1.2 GPM Aerator	-24" [610mm] Sensor Cable  Removable Strainer Mounting Surface	[92mm : Water F w/ Inter AC or D Hardwir	nal Flow Control C Operated w/ (4	Module Box (Blue) Setting Switches, 4) AA Batteries. Terminals on Back  5 1/16"  [129mm]  - Ø 1/8" [3mm] Anti-rotation Pin. Remove
1/2" NPSM x 1/4" NPSM— 18" [457mm] Long Flexible Stainless Steel Hose		[57mm] Maximum Thickness  100-240 VAC w/ 71" [1800r Power Cord. (Remove Ruk on Module ar to Connect)	nm] Long ober Plugs	Pin if Desired. (See Mounting Hole Detail)  Mounting Hole Detail
Temperature Mixing Valve w/ Integral Check Valves	—(2) 3/8" Co 18" [457m Supply Ho		1/2" NPSM tainless Steel	↓
Product Specifications: Chrome Plated Brass Electronic Faucet:	Single Hole Dock Mount S	oout w/	Product Compliance:	
Chrome Plated Brass Electronic Faucet: Single Hole Deck Mount Spout w/VR 1.2 GPM Aerator, AC/DC Control Module w/ Internal Flow Control Setting Switches, Temperature Control Mixing Valve w/ Integral Check Valves 18" Flexible Stainless Steel Supply Hoses  ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA)				

UL 1951

Scale:

1:6

Sheet: 1 of

07/23/16



## T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.


EC-3102-VF12

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

	<u> </u>			
ITEM NO.	SALES NO.	DESCRIPTION		
1	B-0199-08-F12	VR 1.2 GPM Aerator, 13/16-27 UN Male w/ Key		
2	017195-45	Angled Sensor w/ Cable		
3	016297-45	Inlet Hose, Faucet, 1/2" NPSM-F x 1/4" NPSM-F		
4	016647-45	ChekPoint Electronic Module (Blue)		
5	5EF-0002	Plug-in A/C Transformer		
6	5EF-0006	Mechanical Mixing Valve		
7	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM		
8	015425-45	Vandal Resistant Key		
9	EC-FILTER	Replacement Filter		

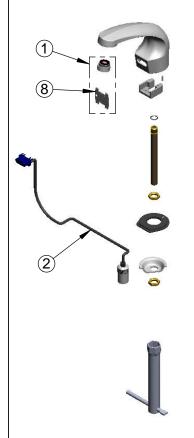

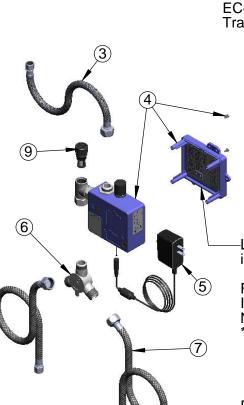

A Maximum of (8) ChekPoint Faucets can be Hardwire Connected and Powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer. (Sold Separately)

Label for Flow Control Switch Settings is Located on Inside of Back Cover.

Flow Control Switches are Located Inside Module Housing in Black Box Next to Battery Compartment.

- \*Switches are Set to DEFAULT Position:
  - Auto Time Out = 15 Seconds
  - Shut Off Delay = 1 Second
  - Auto Flush = ÓFF

Remove (4) Screws and Back Cover to Access Switches.

- \*Available Water Flow Control Selections:
- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
- Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

## **Product Specifications:**

Chrome Plated Brass Electronic Faucet: Single Hole Deck Mount Spout w/VR 1.2 GPM Aerator, AC/DC Control Module w/ Internal Flow Control Setting Switches, Temperature Control Mixing Valve w/ Integral Check Valves 18" Flexible Stainless Steel Supply Hoses

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: GEF Checked: JRM Approved: JHB Date: 07/23/16 Scale: NTS Sheet: 2 of 2