

## **VIPER™ ELITE CARBON**

2 FLAVOR FROZEN DISPENSER



# **FEATURES**

Building on nearly 50 years of experience, Viper Elite raises the bar in frozen with superior engineering and quality.

**Enhanced Reliability** – Increase uptime with the most reliable FCB dispenser on the market

**Syrup Flexibility** – New pressure transducers ensure you'll be able to perform as syrups change in the future

**Expand Drink Portfolios** – Individual barrel flexibility (FCB/FUB) and profile settings

**Updated Styling** – Pairing high-tech performance with a high-tech look

**Intelligent Defrost™** – Patented adaptive defrost keeps you up and running during peak demand so you never miss a sale

**Information at your fingertips** - quickly access manuals and easy-to-follow staff and service videos via QR code

**C3 Technology** – Cooling, carbonation, and controls provide unmatched drink profile consistency, builds repeat sales and minimizes syrup usage

**Programmable sleep mode** – Conserves energy in off hours

**Technician designed** – Reduced maintenance and service times

ADA Compliant SPH Valve – ADA handle shown above

#### **MODELS**

| PART NUMBER | DESCRIPTION   |
|-------------|---|
| 621260164   | Viper Elite Carbon 2 flavor, 230/60Hz, SPH Valve, Tall Merchandiser |
| 621250164   | Viper Elite Carbon 2 flavor, 230/50Hz, SPH Valve, Tall Merchandiser |

#### **ACCESSORIES**

| PART NUMBER | DESCRIPTION  |
|-------------|--|
| 629087406   | Leg kit, 4" legs adjustable to 5.25"                 |
| 620043075   | Viper 2 flavor cart, stainless steel                 |
| 620042822   | Viper 2 flavor generic graphic for tall merchandiser |
| 620042868   | Generic flavor card set (includes 18 flavors)        |
| 325674000   | Buck and boost transformer                           |

Refer to installation accessory guideline for complete list.

### TECHNICAL SPECIFICATIONS

ELECTRICAL RATINGS...... 230V +/- 15V 60Hz, 20a, single phase

230V +/- 15V 50HZ, 20a, single phase (includes 8ft. power cord NEMA L6-20P molded plug connection)

PRESSURE REQUIREMENTS.... CO2 = 75 psig

Water = 25 min. psig dynamic

DRAW CAPACITY ...... 60-66 oz/min. continuous, alternating

barrels @ 75°F ambient

REFRIGERATION............ 15,000 BTU, R404A

MIN. CLEARANCE REQUIRED... Top: 12"

Each side: 2" or Back: 2"

UNIT DIMENSIONS . . . . . . . . . . 17"W x 32.5"D x 43.7"H


(tall merchandiser)


GRAPHIC CARD DIMENSIONS. . . 16.75"W x 18.75"H (tall merchandiser)


FLAVOR CARD DIMENSIONS.... 6.5"W x 4"H

SHIPPING WEIGHT . . . . . . . . . 410 lbs; cart 175 lbs

AGENCY LISTINGS ...... 60 Hz CUSTED UN (NSF) C €





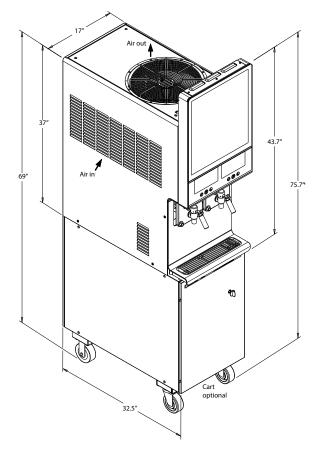



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A. Ph: 763.488.8200 Email: webmaster@cornelius.com 101 Broadway Street West Osseo, MN 55369 www.cornelius-usa.com