


**APPLICATION:**

**JOB NAME:**

**QUANTITY:** \_\_\_\_\_ **ITEM NO.:** \_\_\_\_\_

**PRODUCT NAME:**  
**PRE-RINSE SPRING STYLE WALL MOUNT WITH WALL BRACKET & ADD-ON FAUCET**

**SPECIAL CONFIGURATION**  
 **CHECK BASE MODEL AND OPTIONS**

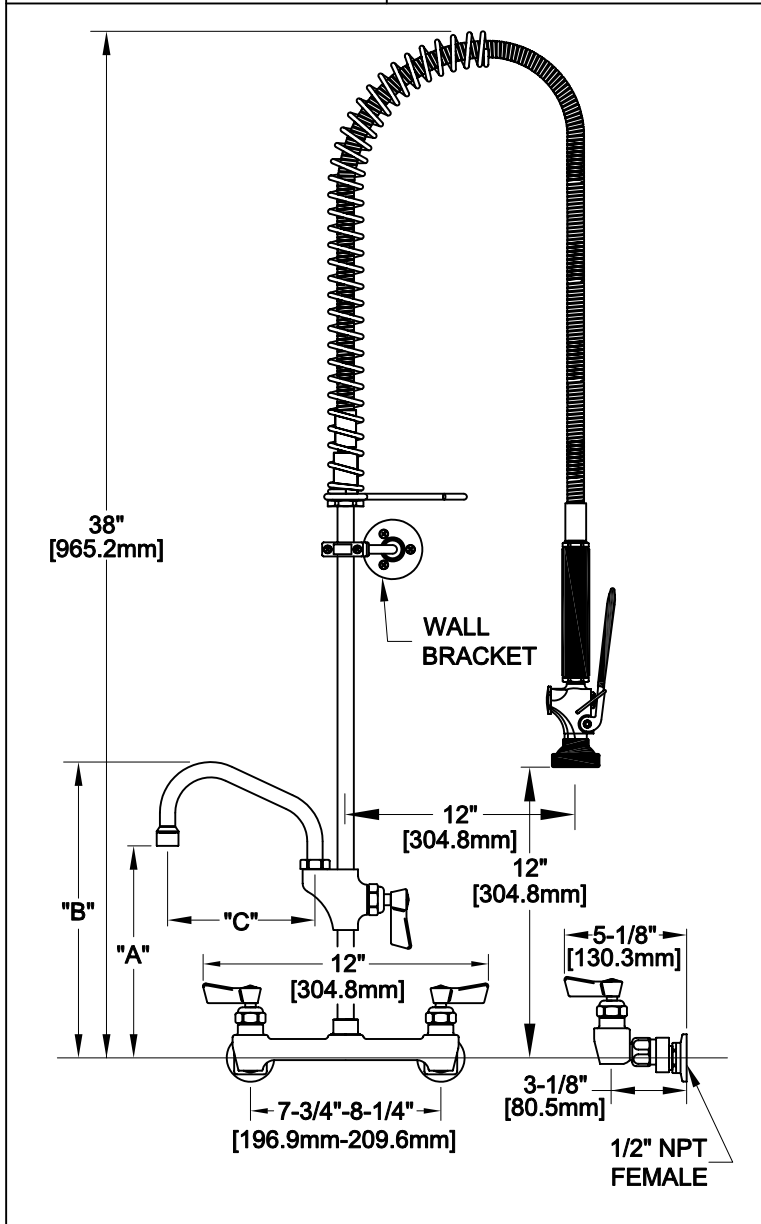

**MODEL:**

- 34355 WITH 6" SWING SPOUT
- 34363 WITH 8" SWING SPOUT
- 34371 WITH 10" SWING SPOUT
- 34398 WITH 12" SWING SPOUT
- 34401 WITH 14" SWING SPOUT
- 34428 WITH 16" SWING SPOUT

**OPTIONS OR MODIFICATIONS:**

- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
- BACKFLOW PREVENTER
- BRUSH
- VANDAL RESISTANT KIT
- HANDLES (CROSS OR WRIST) CIRCLE STYLE
- OTHER \_\_\_\_\_

**FEATURES:**

- MAIN CONTROL VALVE**
- \* WALL MOUNT
  - \* ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
  - \* INTERNAL SPRING LOADED CHECK VALVES
  - \* SWIVELLING SEAT DISKS
  - \* HOT SIDE STEM - RIGHT HAND CHECK
  - \* COLD SIDE STEM - LEFT HAND CHECK
  - \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS
- ADD-ON CONTROL VALVE**
- \* STEM - RIGHT HAND SWIVEL
  - \* HOT INDEX BUTTON
  - \* SWIVELLING SEAT DISKS
  - \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.
- HOSE**
- \* 36" LENGTH
  - \* STAINLESS STEEL END FITTINGS
  - \* STAINLESS STEEL EXTERNAL JACKET
  - \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
  - \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS
- ULTRA SPRAY VALVE**
- \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
  - \* CLEANS FASTER - TEST PROVEN
  - \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
  - \* INTERCHANGEABLE - FITS ALL BRANDS

**WALL BRACKET**

- \* ADJUSTS FROM 2" TO 12"

**SYSTEM LIMITS**

- \* TEMP: 40°F MIN. TO 140°F MAX. STATIC
- \* PRESSURE 200 PSI MAX. STATIC
- \* SHIPPING WEIGHT: 15.0 LBS

ROUGH-IN	MODEL	DIM "A"	DIM "B"	DIM "C"
<p>1/2" NPT MALE*</p> <p>8"±1/4" [203.2±6.4mm]</p> <p>*NIPPLES NOT INCLUDED</p>	34355	8-3/4" [221.3mm]	12-3/8" [313.3mm]	6" [152.4mm]
	34363	9" [227.6mm]	12-7/8" [326.0mm]	8" [203.2mm]
	34371	9-5/8" [243.5mm]	13-3/8" [340.3mm]	10" [254.0mm]
	34398	10-1/4" [259.4mm]	13-7/8" [351.4mm]	12" [304.8mm]
	34401	10-5/8" [275.0mm]	14-3/4" [373.7mm]	14" [355.6mm]
	34428	11-1/2" [292.1mm]	15-3/8" [389.5mm]	16" [406.4mm]