


REMOTE REFRIGERATED BASE



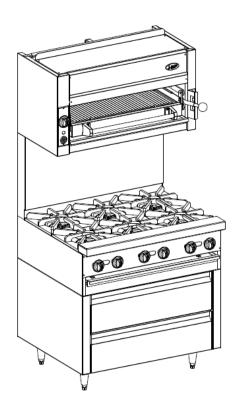

JLRH-02R-B-36 shown with JBR-6-M and JBR-JB36-RM

AVAILABLE OPTIONS

Cabinet extensions available

- 6" stainless steel cabinet
- 12" stainless steel cabinet П
- 18" stainless steel cabinet
- Padlock assemblies (padlocks not included)
- П Condensate evaporator

MODEL NO. DESCRIPTION

	JRLH-02R-B-36	2 DRAWER REMOTE REFRIGERATOR
	JRLH-02R-B-48	2 DRAWER REMOTE REFRIGERATOR
	JRLH-04R-B-60	4 DRAWER REMOTE REFRIGERATOR
	JRLH-04R-B-72	4 DRAWER REMOTE REFRIGERATOR
	JFLH-02R-B-36	2 DRAWER REMOTE FREEZER

- JFLH-02R-B-48 2 DRAWER REMOTE FREEZER
- JFLH-04R-B-60 **4 DRAWER REMOTE FREEZER**
- JFLH-04R-B-72 \Box 4 DRAWER REMOTE FREEZER

Note: If required size is not listed, see options for cabinet extensions. Bases must be ordered in conjunction with BISTRO™ modular base

STANDARD FEATURES

- Cabinet interiors, front face and sides to be stainless steel
- Drawers and cabinet are 100% polyurethane "Shot-In-Place" foam insulated
- Drawer faces have flush mount pull handle. Face and back to be stainless steel
- Self closing drawers have 14 gauge stainless steel track, with 2" heavy duty skate wheel
- Heavy duty rubber drawer gaskets
- Drawers to be easily removable for cleaning
- Drawers to accommodate 6" deep 12" x 20" hotel pans
- Specially designed high density breaker strips installed during the foaming process, without any visible fasteners
- Blower coil evaporator with R-404 expansion valve unless otherwise specified
- Internal conduit for single point electrical connection
- Sleeves for refrigeration and drain lines
- Stainless steel 6" adjustable legs

Note: Electrical junction box, refrigeration line stub out and drain line are all standard rear connections, consult factory if other locations are required.

*Remote units not available on casters.












REMOTE REFRIGERATED BASE



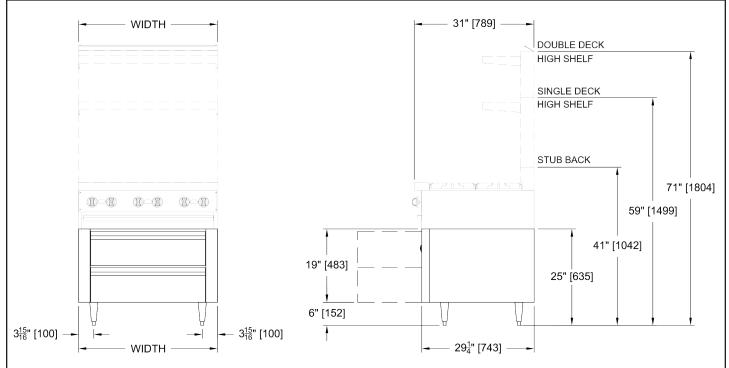

MODEL	WIDTH	DEPTH	HEIGHT	DRAWERS 14-3/8"	DRAWERS 27-1/4"	DRAWERS 40-1/8"	PANS	AMPS	APPX. SHP.WT.			
REMOTE REFRIGERATOR BASES												
JRLH-02R-B-36	36"	29-1/4"	19-1/14"	0	2	0	4	1.45	275 LBS.			
JRLH-02R-B-48	48"	29-1/4"	19-1/14"	0	0	2	6	3.2	350LBS.			
JRLH-02R-B-60	60"	29-1/4"	19-1/14"	2	2	0	6	3.2	400 LBS.			
JRLH-04R-B-72	72"	29-1/4"	19-1/14"	0	4	0	8	3.2	475 LBS.			
	REMOTE FREEZER BASES											
JFLH-02R-B-36	36"	29-1/4"	19-1/14"	0	2	0	4	3.5	275 LBS.			
JFLH-02R-B-48	48"	29-1/4"	19-1/14"	0	0	2	6	4.4	350 LBS.			
JFLH-02R-B-60	60"	29-1/4"	19-1/14"	0	4	0	6	4.4	400 LBS.			
JFLH-04R-B-72	72"	29-1/4"	19-1/14"	0	4	0	8	4.4	475 LBS.			

DESCRIPTION:

Low Height Remote refrigerated bases for exclusive use with Jade Range, LLC. Bistro™ modular series units. To be Model #_____, manufactured by Jade Range, LLC. Cabinet interior, front, face, drawers and sides to be stainless steel. Drawers and cabinet to be 100% polyurethane "Shot-In-Place" foam insulated. Provide easily removable self closing drawers to accommodate 6" deep 12" x 20" hotel pans and 14 gauge stainless steel track, with 2" heavy duty skate wheels. Provide heavy duty rubber drawer gaskets, face

mounted dial thermometers, blower coil evaporator with R-404 expansion valve, internal conduit for single point electrical connection. Sleeves for refrigeration and drain lines. Supply stainless steel adjustable 6" legs.

UTILITY INFORMATION - ELECTRICAL:

 Standard: 115v/60/1 (for other electrical requirements consult factory)

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 • FAX: 714-961-2550

WWW.JADERANGE.COM

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA

