

# Champion®

The Dishwashing Machine Specialists

Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Quantity \_\_\_\_\_

MODEL RW-72 WASHER

## STANDARD FEATURES

- Heavy-duty stainless steel construction
- Double-skinned hinged door design
- Standard and custom wash racks
- Choice of tank heat:  
electric, infrared gas or steam
- Moisture resistant control gauges
- Easy to clean, dual filtration system
- Recirculating wash water
- Two (2) 15 Hp pumps
- Adjustable wash and rinse cycles
- Digital Control & Information Center
- 72 sheet pan capacity
- Fresh water sanitizing rinse
- Designed for pit or ramp installations
- Precision engineered spray arm assembly
- One year parts and labor warranty

## MODEL RW-72

Cart, Cabinet, Rack  
and Pan Washer




(Shown with optional  
fold-away ramp)


Photo is for general visual representation only.  
Please refer to specifications for the latest  
detailed product information.

## OPTIONS


Additional Panwasher and Rackwasher Models:



RW-36



RW-54



RW-66

Champion Industries, Inc.  
3765 Champion Blvd., Winston-Salem, NC 27105  
Tel: 336/661-1556 Fax: 336/661-1979

2674 N. Service Road,  
Jordan Station, Ontario, Canada L0R 1S0  
Tel: 800/263-5798 Fax: 905/562-4618



[www.championindustries.com](http://www.championindustries.com)

# MODEL RW-72

Cart, Cabinet,  
 Rack and Pan Washer

**Champion**<sup>®</sup>  
 The Dishwashing Machine Specialists

Dimensions shown in inches

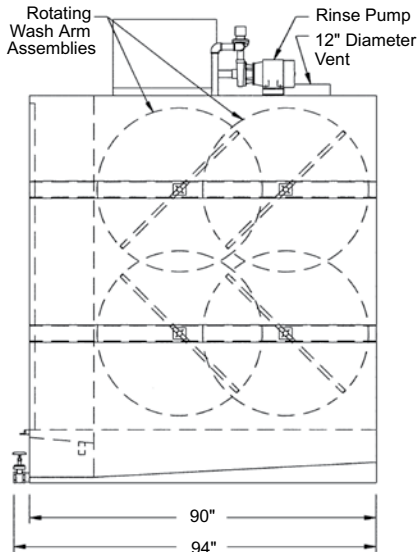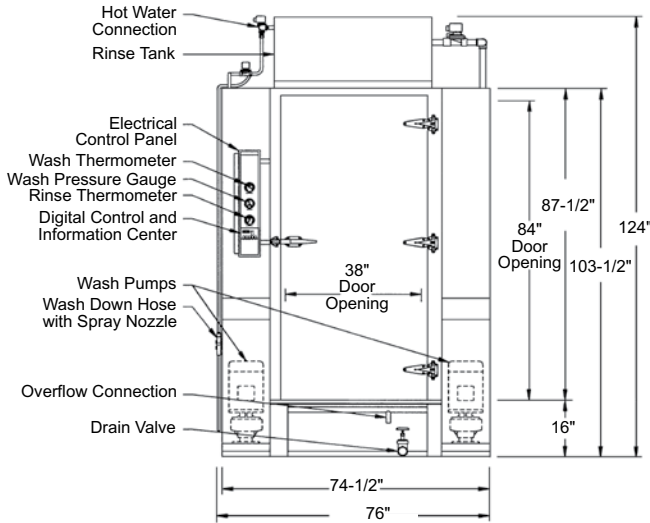

## SPECIFICATIONS

### Door

Double skinned stainless steel with exterior latch and inside release handle.

### Filter

Stainless steel, perforated, screen type.

### Water Pump

Two (2) 15 Hp, 208/240/480 volt, 3 phase, 60 cycle with output of 250 gallons per minute at 35 to 45 P.S.I. each.

### Digital Control & Information Center

110 volt control circuit with push pad operation of "Power On", "Stop" and "Short, Medium or Long Wash Cycles". A digital display indicates "Time Remaining" for each cycle. LED's indicate wash, rinse and unload functions. A buzzer is also included to provide an audible indication of time to unload. A pre-programmed circuit board allows the push pad to be used as a "Diagnostic Center" by displaying "Error Codes" for ease of troubleshooting.

### Gauges

Special moisture resistant gauges measure wash temperature, rinse temperature and wash pressure.

### Wash Tank

Stainless steel with electric, gas or steam heating, thermostatically controlled, low water protected, sloped to drain with a 250 gallon capacity.

### Pumped Rinse Tank

Stainless steel with electric, gas or steam heating to provide 180°F/190°F hot sanitizing rinse.

### Racks

Constructed of stainless steel. Built to match specific washing requirements.

Champion Industries, Inc.,  
 3765 Champion Blvd., NC 27105  
 336/661-1556 • Fax: 336/661-1979  
 2674 N. Service Rd, Jordan Station, Ontario, Canada  
 L0R 1S0 • 800/263-5798 • Fax: 905/562-4618

ChampionIndustries.com • ChampionIndustries.com/canada • sales@moyerdiebellimited.com

an Ali Group Company



The Dishwashing Machine Specialists

## SPECIFICATIONS

### MODEL RW-72 CART, CABINET, RACK AND PAN WASHER

<b>Cabinet</b>	74-1/2" wide x 98" deep x 103-1/2" high. Clearance height 124". Standard door opening: 38" wide x 84" high. Wash chamber: 38" wide x 80" deep x 84" high. constructed of 12, 14 & 16 gauge, stainless steel. All seams tigwelded, cleaned and polished. Note: for pass-thru operation cabinet length is 108".
<b>Door</b>	Standard right hand or optional left hand swing constructed of 14 and 16 gauge, stainless steel with integral stainless steel framework. Door double skinned for added strength. Equipped with door latch and inside release handle. Door is interlocked with limit switch to prevent machine operation while open.
<b>Washer Floor</b>	Floor constructed of 12 gauge stainless steel formed sheets designed to provide maximum strength. Floor supports constructed of 3" x 3" x 1/4" stainless steel angle.
<b>Recirculating Wash Tank</b>	Heated by 208/240 at 480 Volt electric immersion heaters, 42 kW total, thermostatically controlled wash temperature with low water protection system. 250 gallon capacity. 14 gauge stainless steel, sloped to drain. Gas and steam heating options available.
<b>Wash Tank Filter</b>	Perforated, stainless steel screen type designed for increased effectiveness and easy cleaning without emptying wash tank.
<b>Wash Tank Fill Valve</b>	Size 1" brass material, solenoid type, automatic.
<b>Drain Valve</b>	Size 2" brass material, gate type for manual or electrically operated ball valve for an automatic option.
<b>Wash Pump</b>	Two (2) 15 Hp, 208/240 or 480 volt, 3 phase, 60 cycle. Close coupled; Each pump delivers 250 gallons per minute at 35 to 45 psi, mounted on 12 gauge stainless steelformed channel base.
<b>Rotating Wash Hub &amp; Spray Arm Assembly</b>	Water-driven stainless steel spray arm assembly with stainless steel jets,removable end caps and hand-operated, quick-release mechanism for easy cleaning and reassembly. Mounted on stainless steel base.
<b>Sanitizing Pumped Rinse Tank</b>	Stainless steel, 60 gallon capacity, with 208/240 or 480 Volt electric booster heaters, pumped rinse 42 kW total, to provide 180°/190° F hot sanitizing rinse. 1-1/2 Hp pump to provide 24 gallons per 30-second cycle. Gas and steam coil heating options available.
<b>Final Rinse Piping</b>	Stainless steel tubing with brass compression fittings and brass or optional stainless steel full cone rinse jets.
<b>Control &amp; Information Center</b>	120 volt control circuit with push pad operation of "Power On," "Stop" and Information "Short, Medium or Long Wash Cycles." A digital display indicates "Time Remaining" for each cycle. LED's indicate wash, rinse and unload functions. A buzzer is also included to provide an audible indication when the machine is ready to unload. A pre-programmed circuit board allows the push pad to be used as a "Diagnostic Center" by displaying "Error Codes" for ease of troubleshooting. Moisture resistant gauges measure Wash Temperature, Wash Pressure and Rinse Temperature.
<b>Optional Rinse Hose</b>	Externally mounted spray hose with spray gun for easy cleaning and maintenance of machine.
<b>Steam Exhaust Vent</b>	Steam exhaust vent 12-7/8" diameter, consisting of 14 gauge rolled collar for PVC pipe connection mounted to the top of the machine. Machine pre-wired with control timer for the addition of a fan.



The Dishwashing Machine Specialists

# SPECIFICATIONS MODEL RW-72 CART, CABINET, RACK AND PAN WASHER

MODEL RW-72 WASHER

### Optional Exhaust Fan

One (1) 12" diameter stainless steel fan, with 12-7/8" I.D. collar, mounted on washer to extract excess steam after final rinse cycle. 1/4 Hp TEFC or optional wash down duty motor, 120 volt, 1 phase, 1750 RPM, rated 500 CFM at .05" static pressure.

### Optional Hood and Fan Assembly

Stainless steel hood with 15" diameter stainless steel fan mounted over door to evacuate steam that escapes when door is opened. 1-1/2 Hp TEFC or optional wash down duty motor, 208/240 or 480 volt, 3 phase, 60 cycle, 3450 RPM, rated 2700 CFM at .08" static pressure.

### Racks

(1) stainless steel sheet pan rack, standard. For custom racks, contact factory. Constructed of stainless steel formed angle, mig welded. Supplied with stainless steel casters and nylon wheels.

### Connections

Water Inlet: 120°F, 1" NPT  
Water Drain: 2" NPT  
Overflow: 1-1/4" NPT  
Electrical: Single point connection through knock out on electrical enclosure.  
Steam Heating Option: 3/4" NPT  
Natural or Propane Gas Heating Option: 3/4" NPT

### Electrical Connections

575 voltage available in Canada

Elec. Spec.	Running Amps		
	Electric Wash Electric Booster	Steam Wash <sup>1</sup> Steam Booster	Infrared Gas Wash <sup>2</sup> Infrared Gas Booster
<b>208 Volt 3 phase</b>	316	83	83
<b>240 Volt 3 phase</b>	290	79	79
<b>480 Volt 3 phase</b>	146	41	41

<sup>1</sup> Steam Supply: Consumption: 185 lbs./hr.

<sup>2</sup> Gas Supply: Consumption: 180,000 BTU/hr.

### Certifications

UL and UL Sanitation Listed (all). CUL Listed.