

Special Features:

- ✓ Reach-In Refrigerator
- ✓ 1 Solid Swing Door (Self-Closing)
- ✓ 24.9"W x 31.5"D x 79.5"H
- ✓ 16.3 Cu. Ft. Capacity
- ✓ 33-41 °F Temperature
- ✓ 115v/60hz/1ph
- ✓ NEMA-5-15P Power Cord
- ✓ CFC-Free Refrigerant R290 and Foam
- ✓ Digital Controller with LED Display
- ✓ Stainless Steel Exterior, Aluminum Painted and Bottom Stainless Steel Interior
- ✓ Tested and conforms to NSF-7 Standards

Product Description:

The Empura E-KB24T is a 25-inch, commercial reach-in refrigerator with an 16.3 cu ft storage capacity. It features a single solid-swing door, stainless steel exterior, and a digital control system. The unit is powered by a top-mounted compressor, maintains temperatures between 33 °F and 41 °F, and uses an environmentally friendly R290 refrigerant with CFC-free foam insulation.

About Empura Reach-In Refrigerators:

Empura reach-in refrigerators deliver reliable, energy-efficient cold storage for busy commercial kitchens. Featuring durable stainless steel construction, adjustable shelves, and self-closing doors, they ensure consistent cooling and easy maintenance. Available in one-, two-, and three-section models, these units provide dependable, affordable refrigeration for restaurants, cafes, and catering operations.

Intended For Commercial Use Only. Empura assumes no liability for component failure, factory defects or any other damages for units installed in non-commercial foodservice or residential applications.




TECHNICAL SPECS

Dimensions	
Overall Width	24.9"
Overall Depth	31.5"
Overall Height	79.5"
Interior Width	20.25"
Interior Depth	26.3"
Interior Height	57.9"
Storage Capacity	16.3 Cu. Ft.
Casters	4
Caster Height	4"
Refrigeration	
Refrigerant	R290
Temperature Range	33-41 °F
Compressor Horsepower	1/5 HP
CFC Free	Yes
Defrost Cycle	Automatic
BTU (LBP)	N/A
Compressor Location	Top


Construction	
Display / Control Type	LED Display / Digital
Insulation	C5H10
Exterior Materials	Stainless Steel
Interior Materials	Stainless Steel
Shelves	3
Number of Doors	1
Door Type	Solid
Door Hinge Location	Right
Number of Shelves	3
Installation	Freestanding
Individual Shelf Capacity	48 Lbs.
Electrical	
V / HZ / Phase	115v/60hz/1ph
Amps	3
Plug Type	NEMA 5-15P
Shipping	
Ship Weight	300 lbs.

UNIT VIEW


Front View

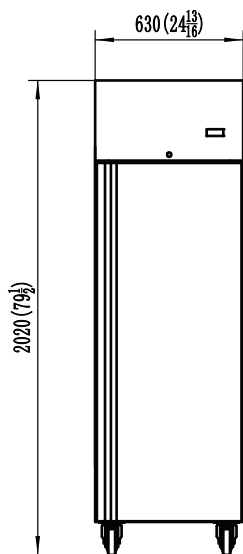

Side View

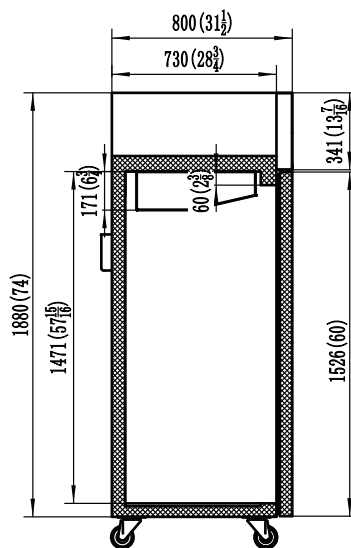

Top View

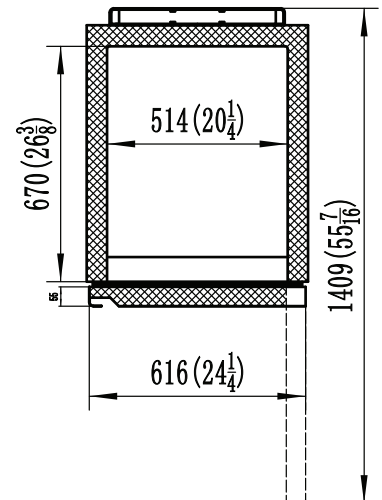

Attention CA Residents: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov



NEMA 5-15P Plug:
This unit comes with a NEMA 5-15P plug