

MODELS: XTRM-1 (1.5" OPENING)  
 XTRM-2, 2M\* (1.5" OPENING)  
 XTRM-3, 3M\* (1.5" OPENING)

XTRM-2H, 2HM\* (3" OPENING)  
 XTRM-3H, 3HM\* (3" OPENING)

*\*M denotes Marine option*

X\*TRM-1



X\*TRM-2



X\*TRM-3



## OPTIONS & ACCESSORIES

- Stacking Kit (XTRM-2 & XTRM-3)
- Gluten Free Top Label-Purple, Covers top, front, rear, and partial areas of the sides.
- Marine Package USPH Compliant:
  - ◊ All External and Food Zone Fasteners are hex head (No Flat or Phillips)
  - ◊ 4" flanged feet for mounting
  - ◊ Available on the 2, 2H, 3, & 3H models
  - ◊ Rear Covers are available for models X2, X2H and X3

## FEATURES AT A GLANCE

- Small counter space footprint
- "Cool Touch" exteriors prevent injuries
- Power saver switch reduces energy consumption by 50%.
- Removable side panel for service
- High temperature bearings never require lubrication
- Stainless steel housing with powder-coated aluminum front corners
- Metal sheathed heating elements out-perform competitive quartz tube heating
- Stainless steel conveyor belt
- One inch adjustable legs.

## WARRANTY

These units come with a two [2] year warranty for parts and labor. Marine package toaster warranty is one [1] year parts only.

## TOASTING CAPACITY\*

XTRM-1: 350 slices per hour  
 XTRM-2,2M: 800 slices per hour  
 XTRM-2H,2HM: 600 slices per hour  
 XTRM-3,3M: 1050 slices per hour  
 XTRM-3H,3HM: 800 slices per hour

## CONSTRUCTION


- Stainless steel top skirt, grease trough, grease collector drawer, and front panel. Stainless steel radiant. Aluminized steel sides and back panel. 1" minimum standard leg height, 4" adjustable legs optional. Welded construction.

## ELECTRICAL SPECIFICATIONS

- Equipped with a 39" three wire grounded power cord and standard three pronged male plug. U.S. 120V units use a NEMA 5-15P plug. Canadian 120V units use a 5-20P plug, 208V and 240V use a NEMA 6-20P plug.

## CERTIFICATIONS


Certified by the following agencies:

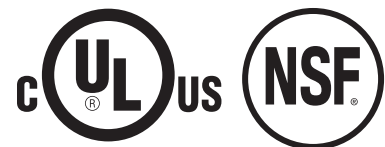

MODELS: XTRM-1 (1.5" OPENING)  
XTRM-2, 2M\* (1.5" OPENING)  
XTRM-3, 3M\* (1.5" OPENING)

XTRM-2H, 2HM\* (3" OPENING)  
XTRM-3H, 3HM\* (3" OPENING)  
*\*M denotes Marine option*

### EQUIPMENT DIMENSIONS




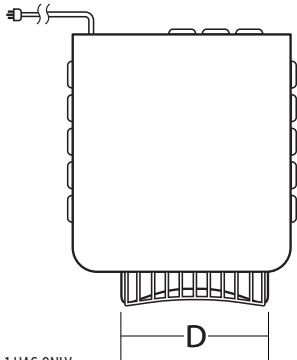


XTRM-1 HAS ONLY ONE CONTROL KNOB

Model	A (Width)	B (Depth)	C (Height)	D (Opening)
XTRM-1	15.19"	16.75"	12.22"	10.5"
XTRM-2, 2M	15.69"	16.75"	15.0"	10.5"
XTRM-2H, 2HM	15.69"	16.75"	16.5"	10.5"
XTRM-3, 3M	18.69"	17.03"	15.0"	13.5"
XTRM-3H, 3HM	18.69"	17.03"	16.5"	13.5"

Product opening height is 1-1/2" on the XTRM-1, XTRM-2, XTRM-2M and XTRM-3, XTRM-3M

Product opening height is 3" on the XTRM-2H, XTRM-2HM and XTRM-3H, XTRM-3HM

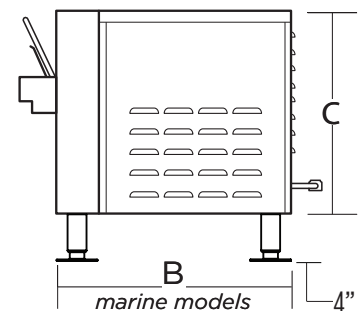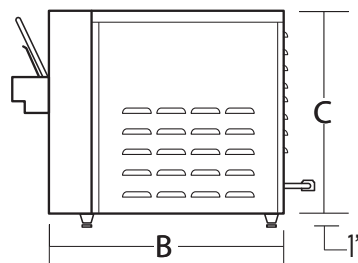

### MECHANICAL SPECIFICATIONS

Model #	Watts	Voltage	Phase	Amps	Overall Dimensions			Ship Weight**
					Width (A) x Depth (B) x Height (C) (inches)	Opening Width (D)	Lbs. (Kilos)	
XTRM-1	1725	120	1	14.4	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-1	1725	208	1	8.2	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-1	1725	240	1	7.2	15.19" x 16.75" x 12.22"	10.5"	45 (15.8)	
XTRM-2,2M	2840	208	1	13.6	15.69" x 16.75" x 15.0"	10.5"	50 (22.7)	
XTRM-2H, 2HM	2840	208	1	13.6	15.69" x 16.75" x 16.5"	10.5"	54 (24.5)	
XTRM-2, 2M	2840	240	1	11.8	15.69" x 16.75" x 15.0"	10.5"	50 (22.7)	
XTRM-2H, 2HM	2840	240	1	11.8	15.69" x 16.75" x 16.5"	10.5"	54 (24.5)	
XTRM-3, 3M	3340	208	1	16.0	18.69" x 17.03" x 15.0"	13.5"	56 (25.4)	
XTRM-3H, 3HM	3340	208	1	16.0	18.69" x 17.03" x 16.5"	13.5"	61 (27.7)	
XTRM-3, 3M	3340	240	1	14.0	18.69" x 17.03" x 15.0"	13.5"	56 (25.4)	
XTRM-3H, 3HM	3340	240	1	14.0	18.69" x 17.03" x 16.5"	13.5"	61 (27.7)	

**\*\*Add 5 additional lbs to Shipping Weight for Marine models**

Freight Class: 100  
FOB: Smithville, 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.