

Hand held Mixers

Bermixer PRO 750W with Stainless Steel Tube 26"


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



602195 (BP7565U) Bermixer PRO, portable, hand held immersion blender, variable speed (up to 10000 RPM), handle grip, with 26" cutter tube attachment, 750 watt, NEMA 5-15P

Short Form Specification

Item No. _____

Bermixer PRO, portable, hand held immersion blender, variable speed, handle grip, with 26" stainless steel cutter tube, 1 HP, 750 watt, 115v/60/1. Stainless steel tubes (various lengths) and whisk available upon request as an accessory, to mix, liquidize, whip or emulsify.

IP55 water protected control panel.
 With NEMA 5-15P Plus.

- #### Main Features
- Parts in contact with food - tube, blade, shaft - can be completely dismantled without tools for easy cleaning.
 - Designed to be used directly in stew pots up to 76 gal (290 lt).
 - Delivered with:-flat base motor-stainless steel tube-space saving storing wall support
 - Anti-splash bell knife design.
 - Tube, knife and whisks are dishwasher safe.
 - Light weight, ergonomic grip and adjustable speeds make preparation tasks fast and easy.
 - Overheating warning red indicator.
 - Bayonet system makes fast and simple to exchange tools.
 - Productivity suitable for 50 to 300 meals per service.


- #### Construction
- Motor has an air cooling system and is protected against overheating (in case of long intensive work).
 - Maximum speed 10000 rpm.
 - Power: 750 watts (1 HP).
 - Smart speed control to ensure the right power according to the work load.
 - Water protected motor unit (controls are IP55, IP34 throughout machine).

Included Accessories	
• 1 of Stainless Steel cutter tube 26in (553mm)	PNC 650135
Optional Accessories	
• Stainless Steel cutter tube 14in (353mm)	PNC 650132 <input type="checkbox"/>
• Stainless Steel cutter tube 18in (453mm)	PNC 650133 <input type="checkbox"/>
• Stainless Steel cutter tube 22in (553mm)	PNC 650134 <input type="checkbox"/>
• Stainless Steel cutter tube 26in (553mm)	PNC 650135 <input type="checkbox"/>
• Adjustable rail, for containers 15in - 26in	PNC 653292 <input type="checkbox"/>
• Bowl cradle for containers	PNC 653294 <input type="checkbox"/>
• Reinforced whisk 10in	PNC 653578 <input type="checkbox"/>




APPROVAL: _____

Front

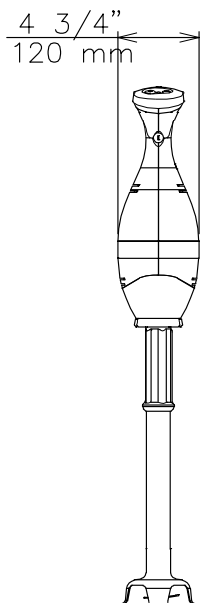


Side

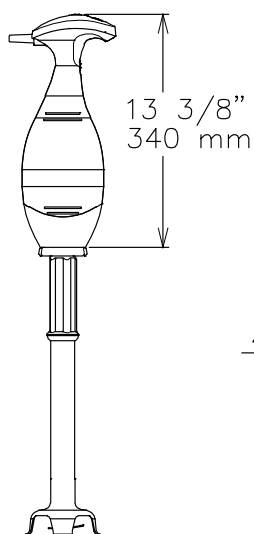

EI = Electrical connection

Top



Electric

Supply voltage:

602195 (BP7565U)

110-120 V/1 ph/50/60 Hz

Total Watts:

0.8 kW

Plug type:

USA NEMA 5-15P

Key Information:

External dimensions, Width: 5 7/16" (138 mm)

External dimensions, Depth: 4 3/4" (120 mm)

External dimensions, Height: 38" (965 mm)

Shipping width: 11 7/16" (290 mm)

Shipping depth: 27 3/16" (690 mm)

Shipping height: 7 1/16" (180 mm)

Shipping weight: 11 lbs (5 kg)