

**WIDE ANGLE LEDGE
OVAL TRAY RACKS
MODEL 207-2410A (SINGLE)
MODEL 2207-2420A (DOUBLE)**

FEATURES AND BENEFITS:

- Durable oval tray rack for bussing or transporting; ideal for banquet operations.
- Extra wide extruded angles on 6-1/8" centers support various size oval trays. Trays held in any position will not fall through.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Two models available:
- Single rack holds 10 oval trays - Model 207-2410A
- Double rack holds 20 oval trays - Model 2207-2420A



207-2410A


**ACCESSORIES and OPTIONS
(Available at extra cost):**

- Pan Stop(s)
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.



207-2410A
2207-2420A

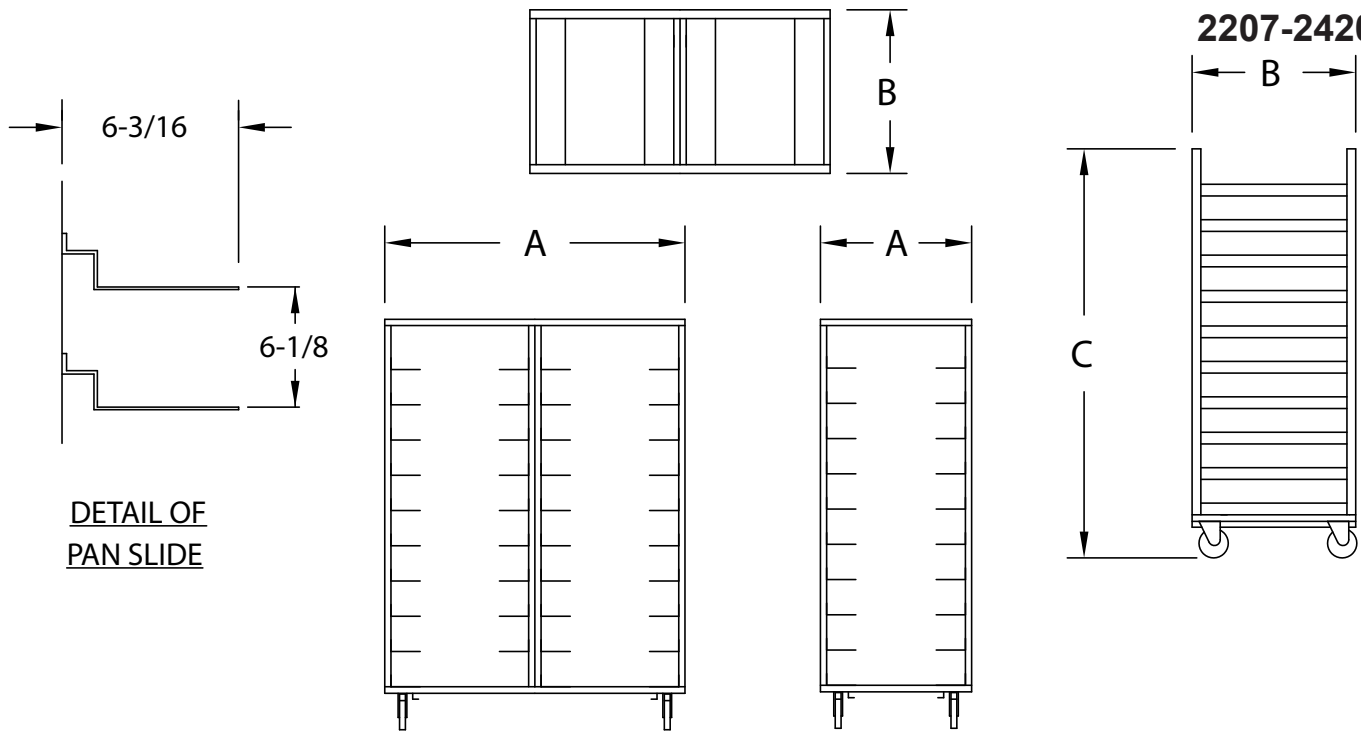

DETAIL OF
PAN SLIDE

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	*WIDTH	DEPTH	HEIGHT		
207-2410A	10	SEE NOTE 1 BELOW	IN	27-5/8	30	70	23-7/16	29-1/4	61-1/2	LBS	85
			MM	705	765	1780	595	745	1565	KG	39
2207-2420A	20	SEE NOTE 1 BELOW	IN	55-1/8	30	70	23-7/16	29-1/4	61-1/2	LBS	172
			MM	1400	765	1780	595	745	1565	KG	78

- Notes: 1. For oval tray sizes: 22-3/4" x 27-5/8", 20-3/4" x 25-1/2" and 23-1/2" x 29".
 2. *Inside width dimension for each compartment.
 3. When ordering bumpers, add 2" to overall dimensions.



Gold indicates our Best Rack with the best warranty in the industry.
 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 2-3/8 x 1-1/16 x .188; welded to posts.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded angles, 2 x 6-3/16 x .100, riveted to posts on 6-1/8" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Oval Tray Rack Model __207-24___. Extruded aluminum welded construction. Extruded aluminum angles on 6-1/8" centers hold (___) trays. Formed .190 bolsters. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.