

# **Electronic Faucets**


## 5EF-1D-DG-4DP

TAG:	

# Electronic Sensor Faucet

## **Architect/Engineering Specifications:**

Single hole deck mount electronic sensor faucet with polished chrome plated brass body, 4" c/c forged deck plate and 5 11/16" rigid gooseneck, 2.2 GPM vandal resistant aerator, AC/DC control module, mechanical mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements

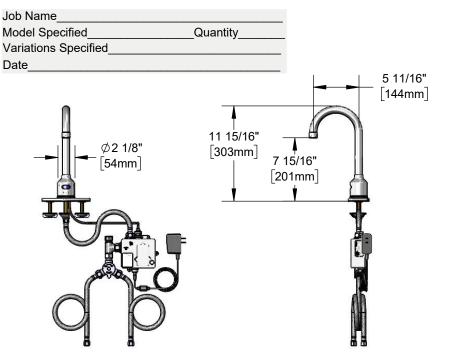



#### Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body
- 4" c/c forged deck plate w/ gasket & mounting hardware
- 5 11/16" rigid gooseneck
- 2.2 GPM vandal resistant aerator, Series 6 (B-0199-06)
- · Water resistant control module
- Plug in AC transformer or (4) AA battery (DC) power options
- Mechanical mixing valve w/ integral check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body, deck plate & tubular spout

## **Product Compliance:**



- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951





Warranty: One Year (Limited)



#### Performance Data:



- Pressure: 20 125 psiTemperature: 40°F 140°F
- Flow Rate: 2.2 GPM @ 60 psi
- Water Consumption: @ 10 sec = .37 gal @ 15 sec = .55 gal

## **Optional Deck Plates**

- ☐ 4" Chrome Plated Brass Deck Plate (Standard)
- □ 8" Chrome Plated Brass Deck Plate

# Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR
2.2	□ B-0199-01	□ B-0199-21	Standard	☐ B-0199-21-VRF







equip Foodservice Accessories

