

Electronic Faucets


5EF-2D-DS-WS



TAG:

Architect/Engineering Specifications:

4" deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 1.5 GPM vandal resistant aerator, AC/DC control module, temperature control mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements

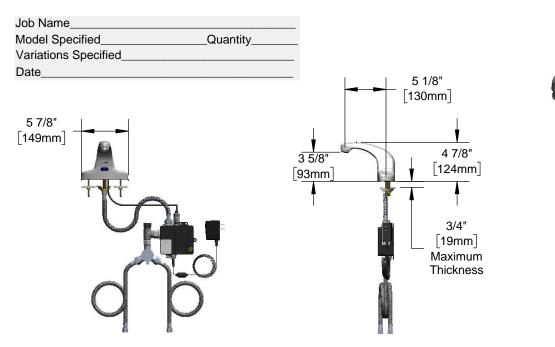



Features & Benefits:

- 4" deck mount faucet w/ polished chrome plated brass body with integral spout
- 1.5 GPM vandal resistant aerator, Series 9 (B-0199-09-WS)
- Water resistant control module
- Plug in AC transformer or (4) AA battery (DC) power options
- Temperature control mixing valve w/ integral check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- · Material: Polished chrome plated brass body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 125 psi
- Temperature: 40°F 140°F
- Flow Rate: 1.5 GPM @ 60 psi
- Water Consumption: @ 10 sec = .25 gal
 @ 15 sec = .38 gal









GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035	
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05	
1.0	N/A	N/A	N/A	□ B-0199-09-LF10	
1.2	□ B-0199-04-F12	2 N/A	□ B-0199-09-F12	2 N/A	
1.5	□ B-0199-04-WS	N/A	Standard	B-0199-09-LF15	
2.2	□ B-0199-04	□ B-0199-25	□ B-0199-09	□ B-0199-27	

equip Foodservice Accessories





