

Swivel Sink and Pantry Faucets


TAG:

5F-1SLX12

Deck Mount Faucet

Architect/Engineering Specifications:

Single hole single temperature deck mount faucet with polished chrome plated brass body, 12 1/8" swing nozzle, laminar flow device, ceramic cartridge, lever handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1\CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI\ICC A117.1 requirements.

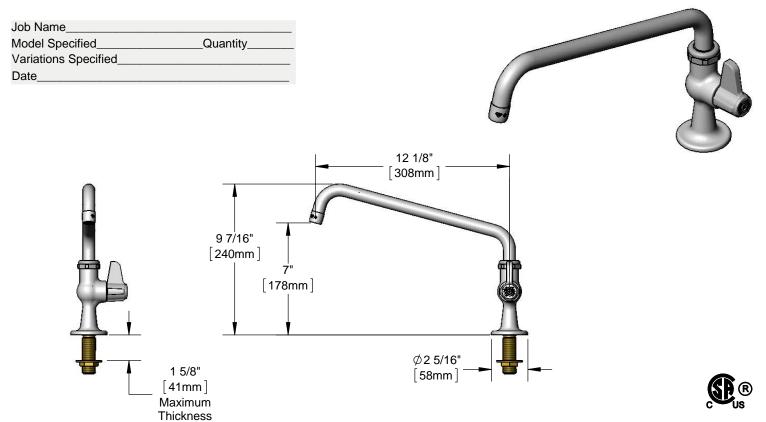

Features & Benefits:

- Single hole single temperature deck mount faucet w/ polished chrome plated brass body
- 12 1/8" swing nozzle w/ laminar flow device
- Quarter-turn ceramic cartridge
- equip lever handle
- 1/2" NPSM male inlet
- Material: Polished chrome plated brass body and chrome plated metal handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi

Temperature: 40 °F - 140 °F

Flow Rate: 4.76 GPM @ 60 psi








equip Foodservice Accessories







ADA Compliant