



Faucets

5F-4WWX00



TAG:

4" Wall Mount Faucet

Architect/Engineering Specifications:

4" wall mount mixing faucet with polished chrome plated brass body, ceramic cartridges, equip wrist action handles and 1/2" NPT male inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

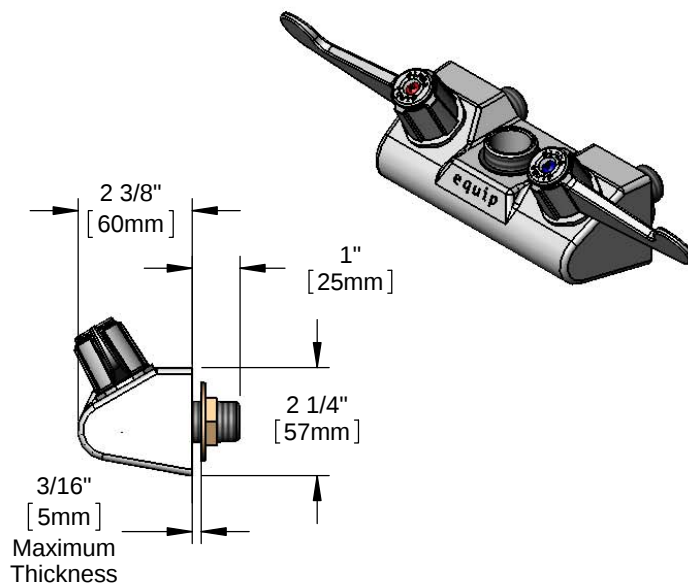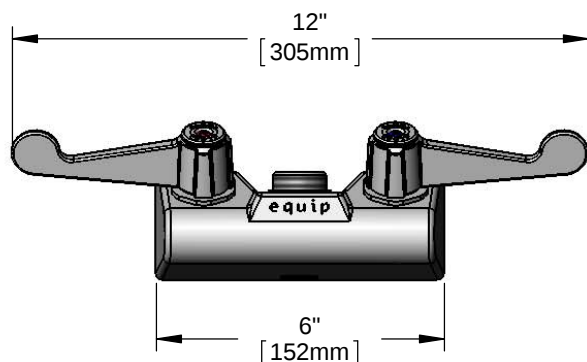

Features & Benefits:

- 4" wall mount mixing faucet w/ polished chrome plated brass body
- Swivel outlet accepts equip swing nozzles
- Quarter-turn ceramic cartridges
- equip wrist action lever handles w/ color codes screws
- 1/2" NPT male inlets
- Material: Polished chrome plated brass body & chrome plated metal handles

equip Swing Nozzles

- ☐ 5SP-06 6" Swing Nozzle
- ☐ 5SP-08 8" Swing Nozzle
- ☐ 5SP-10 10" Swing Nozzle
- ☐ 5SP-12 12" Swing Nozzle
- ☐ 5SP-14 14" Swing Nozzle
- ☐ 5SP-16 16" Swing Nozzle
- ☐ 5SP-18 18" Swing Nozzle

equip Swivel Goosenecks (D x K)

- ☐ 5SP-05 5 3/4" x 8 9/16" Swivel Gooseneck
- ☐ 5SP-09 9" x 7" Swivel Gooseneck

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 16.5 GPM @ 60 psi

(Outlet Device &/or Final Configuration May Reduce Flow Rate)



equip Foodservice Accessories



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-891-4808 • Fax 800-868-0084
www.tsbrass.com

Date: 02/29/16