



Save-T Air Curtains

Model: S-LI Light Industrial


For Climate and Environmental Control on Openings up to 12' high and Insect Control on Openings up to 10' high.

PRODUCT DATA (H) HIGH SPEED (L) LOW SPEED

Model	S-LI-36-1-2S	S-LI-42-1-2S	S-LI-48-1-2S	S-LI-60-2-2S	S-LI-72-2-2S	S-LI-84-2-2S	S-LI-96-2-2S	S-LI-108-3-2S	S-LI-120-3-2S	S-LI-132-3-2S	S-LI-144-4-2S
Nozzle Width Inches	36	42	48	60	72	84	96	108	118	133	145
Max. FPM at Nozzle	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920	H 4345 L 2920
Max. CFM at Nozzle	H 2985 L 2005	H 3485 L 2345	H 3985 L 2680	H 5200 L 3350	H 5975 L 4020	H 6970 L 4690	H 7965 L 5360	H 8965 L 6030	H 9960 L 6695	H 11175 L 7370	H 11955 L 8040
Avg. FPM at Nozzle	H 3805 L 2560	H 3260 L 2195	H 2855 L 1920	H 3415 L 2295	H 3800 L 2560	H 3265 L 2240	H 2855 L 1920	H 3810 L 2560	H 3270 L 2195	H 2880 L 1940	H 3810 L 2560
CFM at Nozzle	H 2620 L 1760	H 2605 L 1745	H 2635 L 1770	H 3925 L 2640	H 5235 L 3520	H 5215 L 3485	H 5235 L 3520	H 7850 L 5285	H 7840 L 5280	H 7815 L 5255	H 10470 L 7045
Outlet Uniformity	95%	93%	92%	94%	95%	93%	92%	95%	94%	94%	95%
Number of Motors	1	1	1	2	2	2	2	3	3	3	4
Horse Power	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Weight (Lbs)	95	100	110	155	180	195	210	255	290	300	350

Sound Level: 63 dba at High Speed; 56 dba on Low Speed
Sound level measured 10 feet from the unit in a free field based on a one motor unit.

Single Phase Motor Voltage Available: 120 208/230 480 575
Amp Draw Per Motor: 8.0 3.6 2.0 1.5

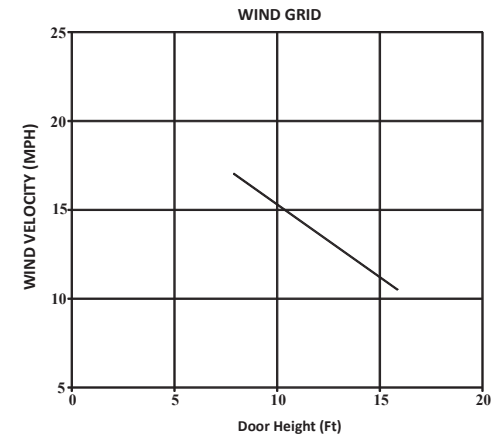

TMI, LLC
5350 Campbells Run Road • Pittsburgh, PA 15205
Toll Free: 1-800-888-9750 • Local: 412-787-9750 • Fax: 412-787-3665
Web: www.tmi-pvc.com